

CB-06M

WORK SHOP

TOOLS

mini catalogue

GROZ


GROZ
GROZ
50 YEARS OF TOOLS. A LIFETIME OF TRUST.

OUR STORY



2 MILLION
SQUARE FEET
MANUFACTURING AREA



07
PLANTS




INDIA'S LARGEST TOOLS MANUFACTURER

SALES NETWORK **85** COUNTRIES



4000
WORKFORCE

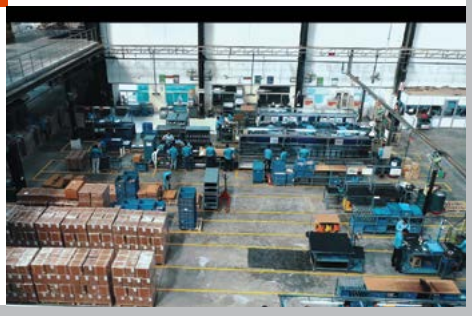

GROZ

CONTENTS

01

striking tools

Hammers - Indestructible Handle	7
Hammers - Anti-Vibe	11
Hammers - Fibreglass Handle	12
Hammers - Hickory Wood Handle	15
Automotive Hammers	18
Dead Blow Hammers & Mallets	19
Axes & Mauls	21
Punches & Chisels	22
Wrecking & Demolition Bars	25





02

tool storage

Rolling Tool Cabinets	27
Tool Trolley Kits	31
Tool Boxes	31
Tool Chests	32
Work Benches	34
Service Carts	34
Tool Holders	35
Tool Bags	37

03

torque tools

Torque Wrenches 38

Torque Tool Accessories 39



04

automotive tools

Pry & Alignment Bars 39

Hook & Picks 41

Service Tools 42

Lifting Equipment 44

Screwdrivers & Hex Keys 45

05

sockets & accessories

Hand Sockets 46

Socket Accessories 47

Socket Rails 48

Ratchet Handle 48

Impact Sockets 50

06

spanners & wrenches

Spanners 51

Wrenches 51

07

pliers & cutters

Pliers 52

Cutters 54

08

hacksaw frames & blades

Hacksaw Frames 55

Hacksaw Blades 56

09

vices & clamps

Vices 57

Clamps 59



10

woodworking tools

Woodworking Planes 59

Woodworking Vices 60

Woodworking Clamps 61

11

measuring & marking 62

12

taps, dies & holders 64

13

speciality hand tools 65

HAMMERS – INDESTRUCTIBLE HANDLE





STEEL LOCKING PLATE
locks head to the handle eliminating loosening or dislodging

VULCANIZED RUBBER HANDLE
Absorbs impact & vibration reducing user fatigue

75X STRONGER

SPRING STEEL BARS
Resist overstrike

STEEL REINFORCED LANYARD HOLE

CLUB HAMMERS

ANSI | SANS 387:2014 | BS 876
For material, hardness & performance

- A smaller sledge hammer with relatively lighter weight & shorter handle. Used for minor demolition work, driving in stakes & in metal forming
- 4 Spring Steel bars are locked into the head with a steel locking plate, eliminating loosening or dislodging

CHID

Heavy-duty 50-58 HRC head



SIZES

★	2.5 lbs × 12"	1.1 kg × 300 mm
	2.5 lbs × 16"	1.1 kg × 400 mm
★	4 lbs × 12"	1.8 kg × 300 mm
	4 lbs × 16"	1.8 kg × 400 mm

★ **Bestseller**

CHID-SF

Soft 30-35 HRC head
Soft head prevents damage to struck surfaces



SIZES

2.5 lbs × 12"	1.1 kg × 300 mm
4 lbs × 12"	1.8 kg × 300 mm

DRILLING HAMMER

DHID

- A short handle hammer, useful for light demolition work, driving-in nails & for use with a chisel when cutting stone or metals
- Head hardened 45-51 HRC
- 4 spring steel bars



SIZE

4 lbs × 12"	1.8 kg × 300 mm

SLEDGE HAMMERS

ANSI | SANS 387:2014 | BS 876

For material, hardness & performance

- The Big Boy of hammers; designed for heavy demolition, construction, police, fire & rescue and rebar work
- 4-6 Spring steel bars are locked into the head with a steel locking plate, eliminating loosening or dislodging of head

SHID

Heavy-duty 50-58 HRC head



SIZES

★ 6 lbs × 16"	2.7 kg × 400 mm
6 lbs × 24"	2.7 kg × 600 mm
6 lbs × 30"	2.7 kg × 750 mm
6 lbs × 36"	2.7 kg × 900 mm
8 lbs × 12"	3.6 kg × 300 mm
8 lbs × 16"	3.6 kg × 400 mm
★ 8 lbs × 24"	3.6 kg × 600 mm
★ 8 lbs × 30"	3.6 kg × 750 mm
8 lbs × 36"	3.6 kg × 900 mm
10 lbs × 30"	4.5 kg × 750 mm
10 lbs × 36"	4.5 kg × 900 mm
12 lbs × 30"	5.5 kg × 750 mm
12 lbs × 36"	5.5 kg × 900 mm
★ 14 lbs × 30"	6.3 kg × 750 mm
14 lbs × 36"	6.3 kg × 900 mm
20 lbs × 36"	9 kg × 900 mm

★ **Bestseller**

SHID-SF

Soft 30-35 HRC head
Soft head prevents damage to struck surfaces



SIZES

6 lbs × 30"	2.7 kg × 750 mm
8 lbs × 30"	3.6 kg × 750 mm
10 lbs × 30"	4.5 kg × 750 mm
12 lbs × 30"	5.5 kg × 750 mm
14 lbs × 36"	6.3 kg × 900 mm

SLEDGE HAMMERS DIN 6475

SHID-DIN

- Designed for heavy demolition jobs
- Fully forged heavy duty induction hardened head 50-58 HRC
- 6 Spring steel bars are locked into the head with a steel locking plate, eliminating loosening or dislodging of head

Popular in EUROPE



SIZES

3 kg × 24" (600 mm)
5 kg × 30" (750 mm)

SLEDGE HAMMERS BRASS HEAD

SHID-BR

- Used in combustible environments such as on oil rigs, gas industry and for automotive applications where the struck surface is soft
- 4-6 Spring steel bars are locked into the head with a steel locking plate, eliminating loosening or dislodging of head

Br BRASS

Mar Resistant Head



SIZES

★ 2.5 lbs × 12"	1.1 kg × 300 mm
★ 4 lbs × 12"	1.8 kg × 300 mm
4 lbs × 16"	1.8 kg × 400 mm
6 lbs × 16"	2.7 kg × 400 mm
6 lbs × 30"	2.7 kg × 750 mm
8 lbs × 16"	3.6 kg × 400 mm
8 lbs × 30"	3.6 kg × 750 mm

★ **Bestseller**

SLEDGE HAMMERS COPPER HEAD

- Popular in mining & automotive applications
- Copper head resists sparking & reduces marring of struck surfaces
- 4-6 Spring steel bars are locked into the head with a steel locking plate, eliminating loosening or dislodging of head



CHID-CU



SIZES

2.5 lbs × 12"	1.1 kg × 300 mm
★ 4 lbs × 12"	1.8 kg × 300 mm
4 lbs × 16"	1.8 kg × 400 mm

★ **Bestseller**

SHID-CU



SIZES

6 lbs × 30"	2.7 kg × 750 mm
★ 8 lbs × 24"	3.6 kg × 600 mm
★ 14 lbs × 30"	6.3 kg × 750 mm

★ **Bestseller**

MACHINIST HAMMERS DIN 1041

MHID-DIN

- Metal working hammers
- Useful in forging, riveting & shaping of metals & removal of dents
- Fully forged heavy duty induction hardened head 50-58 HRC
- 2 Spring steel bars are locked into the head with a steel locking plate, eliminating loosening or dislodging of head

Popular in EUROPE



SIZES

300 gm x 13" (330 mm)
500 gm × 13" (330 mm)
800 gm × 14" (350 mm)
1000 gm × 14" (350 mm)

BALL PEIN HAMMERS

ANSI

BS 876

For material, hardness & performance

- A MUST HAVE TOOL for metal workers
- Designed for bending & shaping metal, hand forging, setting rivets and texturing face of metal
- 2 Spring steel bars are locked into the head with a steel locking plate, eliminating loosening or dislodging of head

BPID

Heavy duty head 50-58 HRC



SIZES

16 oz. × 14"	450 gm × 350 mm
20 oz. × 14"	565 gm × 350 mm
★ 24 oz. × 14"	680 gm × 350 mm
★ 32 oz. × 14"	900 gm × 350 mm
48 oz. × 14"	1360 gm × 350 mm

★ **Bestseller**

BPID-SF

Soft head 30-35 HRC



SIZES

24 oz. × 14"	680 gm × 350 mm
32 oz. × 14"	900 gm × 350 mm

BLACKSMITH'S/ CROSS PEIN HAMMERS

CPID

ANSI

- Cross Pein hammers are used in metal working, blacksmithing & in stone work
- Fully forged head induction hardened 50-58 HRC
- 4 Spring steel bars are locked into the head with a steel locking plate, eliminating loosening or dislodging



SIZES

2.5 lbs × 16"	1.1 kg × 400 mm
★ 3.5 lbs × 16"	1.6 kg × 400 mm

★ **Bestseller**

CLAW HAMMER

CLID

- Also known as Nailing Hammer, these are used for woodworking, prying & finishing jobs
- Fully forged head induction hardened 50-58 HRC
- 2 Spring steel bars are locked into the head with a steel locking plate, eliminating loosening or dislodging



SIZE

16 oz × 13"	450 gm × 330 mm

ANSI

BS 876

For material, hardness & performance







TIRE BEAD BREAKER HAMMERS

TBID

- Unique tire & wheel service hammer used for separating tires from wheel rims
- Fully forged head induction hardened 50-58 HRC
- 6 Spring steel bars are locked into the head with a steel locking plate, eliminating loosening or dislodging



Head



Bead breaking Wedge
Convex shape wedge penetrates the tire bead effectively. Groove on the convex shape creates easy passage for the tire lube into the bead



Top hook
Used as a wheel tipper to break the bead on the other side of the wheel



Sledge edge
Has a hook to drag the tire into position

SIZES

5 lbs × 20"	2.2 kg × 500 mm
10 lbs × 32"	4.5 kg × 800 mm

HAMMER KITS

ANSI

KIT-HMID

Choice of kits, ideal for automotive, construction & everyday maintenance jobs

KIT CONSTITUENTS

Type	KIT/HMID/3S/ST	KIT/HMID/3/ST	KIT/HMID/3C/ST
Club / Sledge Hammer - Steel Head	2.5 lbs × 12" (1.1 kg × 300 mm)	4 lbs × 12" (1.8 kg × 300 mm)	4 lbs × 16" (1.8 kg × 400 mm)
Ball Pein Hammer	24 oz × 14" (0.684 kg × 350 mm)	32 oz × 14" (0.912 kg × 350 mm)	32 oz × 14" (0.912 kg × 350 mm)
Cross Pein Hammer	2.5 lbs × 16" (1.1 kg × 400 mm)	2.5 lbs × 16" (1.1 kg × 400 mm)	-
Sledge Hammer Copper Head	-	-	4 lbs × 12" (1.8 kg × 300 mm)





DRILLING HAMMER
ANTI-VIBE

DHLV

- Low vibration - high comfort
- Forged in single piece steel for greater vibration absorption effect
- Non-slip TPR grip for increased control



SIZE

2.5 lbs × 12"	1.1 kg × 300 mm

BALL PEIN HAMMERS
ANTI-VIBE

BPLV

- Low vibration - high comfort
- Forged in single piece steel for greater vibration absorption effect
- Non-slip TPR grip for increased control



SIZES

16 oz × 15"	450 gms × 380 mm
24 oz × 15"	680 gms × 380 mm
32 oz × 15"	900 gms × 380 mm

FRAMING HAMMER
ANTI-VIBE

FHSP

- Framing Hammers are also known as nailing hammers with straight claw
- Low vibration – high comfort
- Forged in single piece steel for greater vibration absorption effect
- Non-slip TPE grip for increased control



SIZE

22 oz. × 15"	627 gms × 380 mm

MAXIMUM IMPACT. ZERO VIBRATION.





SLEDGE HAMMERS

ANSI

SANS 387:2014

BS 876

For material, hardness & performance

SHFG

- Designed for heavy demolition, construction, police, fire & rescue and rebar work
- Fully forged heavy duty induction hardened 50-58 HRC head
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



Available in:

Short Handle: 16" (400 mm)

Long Handle: 36" (900 mm)

SIZES

2.5 lbs. × 16"	1.1 kg × 400 mm
★ 4 lbs. × 16"	1.8 kg × 400 mm
6 lbs. × 36"	2.7 kg × 900 mm
◆ 7 lbs. × 36"	3.2 kg × 900 mm
★ 8 lbs. × 36"	3.6 kg × 900 mm
★ 10 lbs. × 36"	4.5 kg × 900 mm
12 lbs. × 36"	5.5 kg × 900 mm
14 lbs. × 36"	6.3 kg × 900 mm
16 lbs. × 36"	7.3 kg × 900 mm

★ **Bestseller** ◆ New

SLEDGE HAMMERS DIN 6475

SHFG-DIN

- Designed for heavy demolition, driving-in fence posts, rail road and bending & shaping metal
- Fully forged heavy duty induction hardened head 50-58 HRC
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



Popular in EUROPE

SIZES

1 kg × 11" (280 mm)
1.25 kg × 11" (280 mm)
1.5 kg × 11" (280 mm)
2 kg × 12" (300 mm)
3 kg × 36" (900 mm)
4 kg × 36" (900 mm)
5 kg × 36" (900 mm)
6 kg × 36" (900 mm)
8 kg × 36" (900 mm)

SLEDGE HAMMERS DIN 1042

STFG

- Also known as Stoning Hammers, these are designed for light demolition and masonry applications
- Fully forged heavy duty induction hardened head 50-58 HRC
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZES
3 kg × 24" (600 mm)
4 kg × 28" (700 mm)
5 kg × 32 (800 mm)
6 kg × 32" (800 mm)
8 kg × 36" (900 mm)

SLEDGE HAMMERS BRASS HEAD

NEW!

SHFG-BR

- Used in combustible environments such as on oil rigs, gas industry and for automotive applications where the struck surface is soft
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZES	
2.5 lbs × 16"	1.1 kg × 400 mm
4 lbs × 16"	1.8 kg × 400 mm
6 lbs × 16"	2.7 kg × 400 mm
6 lbs × 36"	2.7 kg × 900 mm
8 lbs × 16"	3.6 kg × 400 mm
8 lbs × 36"	3.6 kg × 900 mm

SLEDGE HAMMERS COPPER HEAD

NEW!

SHFG-CU

- Popular in mining & automotive applications
- Copper head resists sparking & reduces marring of struck surfaces
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZES	
2.5 lbs × 16"	1.1 kg × 400 mm
4 lbs × 16"	1.8 kg × 400 mm
6 lbs × 16"	2.7 kg × 400 mm
6 lbs × 36"	2.7 kg × 900 mm
8 lbs × 16"	3.6 kg × 400 mm
8 lbs × 36"	3.6 kg × 900 mm

MACHINIST HAMMERS DIN 1041

MHFG

- Metal working hammers
- Fully forged heavy duty induction hardened head 50-58 HRC
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZES
100 gm × 11" (280 mm)
200 gm × 11" (280 mm)
300 gm × 12" (300 mm)
400 gm × 12" (300 mm)
500 gm × 13" (330 mm)
600 gm × 13" (330 mm)
800 gm × 14" (350 mm)
1000 gm × 14" (350 mm)
1500 gm × 16" (400 mm)
2000 gm × 16" (400 mm)

AUTOMOTIVE HAMMERS BRASS HEAD

NEW!

SHFG-ABR

- Soft face Brass head hammers ideal for use in automotive applications
- Fully forged brass head prevents fracturing or creating shards when striking hard surfaces
- Double injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZES	
1.5 lbs × 12"	0.68 kg × 300 mm
2.5 lbs × 13"	1.1 kg × 330 mm
4 lbs × 13"	1.8 kg × 330 mm

ENGINEER'S HAMMERS

B107.400-2018

ASME

BS 876

For material, hardness & performance

EHFG

- Designed for tile & dry wall demolition and setting bricks & tiles
- Fully forged heavy duty induction hardened head 50-58 HRC
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZES	
2.5 lbs × 14"	1.1 kg × 350 mm
★ 4 lbs × 14"	1.8 kg × 350 mm

★ **Bestseller**

BALL PEIN HAMMERS

ANSI

BS 876

For material, hardness & performance

BPFG

- A MUST HAVE TOOL for metal workers for bending & shaping metals, driving punches & setting rivets etc.
- Fully forged heavy duty induction hardened head 50-58 HRC
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection
- Also available as sets



SIZES

◆ 4 oz × 11"	113 gm × 275 mm
8 oz × 12"	226 gm × 300 mm
12 oz × 13"	340 gm × 330 mm
16 oz × 13"	450 gm × 330 mm
★ 24 oz × 14"	680 gm × 350 mm
★ 32 oz × 14"	900 gm × 350 mm
◆ 40 oz × 16"	1134 gm × 400 mm
48 oz × 16"	1360 gm × 400 mm

★ **Bestseller** ◆ New

CLAW HAMMER

ANSI

BS 876

For material, hardness & performance

CLFG

- Also known as Nailing Hammer, these are used for woodworking, prying & finishing jobs
- Fully forged heavy duty induction hardened head 50-58 HRC
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZE

16 oz. × 13"	450 gm x 330 mm

DRILLING HAMMERS

BS 876

For material, hardness & performance

B107.400-2018

ASME

DHFG

- Popularly called Stone cutter's hammer, these are ideal for the construction workers
- Fully forged heavy duty induction hardened head 50-58 HRC
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZES

2 lbs × 11"	0.9 kg × 280 mm
★ 3 lbs × 11"	1.3 kg × 280 mm
◆ 4 lbs × 11"	1.8 kg × 280 mm

★ **Bestseller** ◆ New

BALL PEIN HAMMER

NEW!

TITANIUM HEAD

BPFG-TI

- 18 oz forged titanium head
- Lightweight titanium head reduces fatigue, yet the driving force equals a 32 oz steel hammer
- Less recoil shock than steel hammer
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZE

18 oz. × 14"	510 gm x 350 mm

BLACKSMITH'S / CROSS PEIN HAMMERS

BS 876

For material, hardness & performance

B107.400-2018

ASME

BHFG

- Cross Pein hammers are used in metal working, blacksmithing & in stone work
- Fully forged heavy duty induction hardened head 50-58 HRC
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZES

2.5 lbs × 14"	1.1 kg × 350 mm
★ 4 lbs × 14"	1.8 kg × 350 mm

★ **Bestseller**

TIRE SERVICE HAMMER

NEW!

THFG

- Ideal for mounting and dismantling tires on passenger cars, trucks, buses, tractors and aircrafts
- Forged head from fine-grained steel on one end & solid rubber face on other end delivers a firm blow with minimal rebound
- Rubber head is designed for driving on or off lock rings without damage to the rim
- Double injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZE

5.5 lbs × 16"	2.5 kg × 400 mm

TIRE BEAD BREAKER HAMMER

NEW!

TBFG

- Unique tire & wheel service hammers, used for separating tires from wheels rims
- Fully forged head induction hardened 50-58 HRC
- Double injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZES

5 lbs × 16"	2.2 kg × 400 mm
10 lbs × 36"	4.5 kg × 900 mm

HAMMERS - HICKORY WOOD HANDLE



SLEDGE HAMMERS

BS 876

For material, hardness & performance

B107.400-2018

ASME

SHHW

- Designed for heavy demolition & hammering applications, fracturing stone & concrete, setting bolts, driving-in stakes etc.
- Fully forged head hardened 50-58 HRC



SIZES

	2.5 lbs × 16"	1.1 kg × 400 mm
★	4 lbs × 16"	1.8 kg × 400 mm
	6 lbs × 30"	2.7 kg × 750 mm
	6 lbs × 36"	2.7 kg × 900 mm
◆	7 lbs × 36"	3.2 kg × 900 mm
	8 lbs × 30"	3.6 kg × 750 mm
★	8 lbs × 36"	3.6 kg × 900 mm
★	10 lbs × 36"	4.5 kg × 900 mm
	12 lbs × 36"	5.5 kg × 900 mm
	14 lbs × 36"	6.3 kg × 900 mm
	16 lbs × 36"	7.3 kg × 900 mm

★ **Bestseller** ◆ New

SLEDGE HAMMERS DIN 6475

SHHW-DIN

- Designed for heavy demolition, driving in fence posts, rail road applications and bending & shaping metals
- Fully forged heavy duty induction hardened head 50-58 HRC

Popular in EUROPE



SIZES

1 kg × 11" (280 mm)
1.25 kg × 11" (280 mm)
1.5 kg × 11" (280 mm)
2 kg × 12" (300 mm)
3 kg × 24" (600 mm)
4 kg × 28" (700 mm)
5 kg × 32" (800 mm)
6 kg × 32" (800 mm)
8 kg × 32" (800 mm)
8 kg × 36" (900 mm)

SLEDGE HAMMERS DIN 1042

STHW

- Also known as Stoning Hammers, these are designed for light demolition and masonry application
- Fully forged heavy duty induction hardened head 50-58 HRC

Popular in EUROPE



SIZES

3 kg × 24" (600 mm)
4 kg × 28" (700 mm)
5 kg × 32" (800 mm)
6 kg × 32" (800 mm)
8 kg × 36" (900 mm)

MACHINIST HAMMERS DIN 1041

MHHW

- Machinist hammers are metal working hammers
- Fully forged heavy duty induction hardened head 50-58 HRC



SIZES

100 gm × 11" (280 mm)
200 gm × 11" (280 mm)
300 gm × 12" (300 mm)
400 gm × 12" (300 mm)
500 gm × 13" (330 mm)
600 gm × 13" (330 mm)
800 gm × 14" (350 mm)
1000 gm × 14" (350 mm)
1500 gm × 16" (400 mm)
2000 gm × 16" (400 mm)

DRILLING HAMMERS

BS 876
For material, hardness & performance

B107.400-2018

DHHW

- Also known as the Stone cutter's hammer, these are ideal for the construction workers
- Fully forged heavy duty induction hardened head 50-58 HRC



SIZES

2 lbs × 11"	900 gm × 280 mm
★ 3 lbs × 11"	1300 gm × 280 mm
◆ 4 lbs × 11"	1800 gm × 280 mm

★ **Bestseller** ◆ New

ENGINEER'S HAMMERS

BS 876
For material, hardness & performance

B107.400-2018

EHHW

- Fully forged heavy duty induction hardened head 50-58 HRC
- A popular tool on any construction site used for drywall & tiling work



SIZES

2.5 lbs × 14"	1.1 kg × 350 mm
★ 4 lbs × 14"	1.8 kg × 350 mm

★ **Bestseller**

BALL PEIN HAMMERS

BS 876
For material, hardness & performance

ANSI

BPHW

- A MUST HAVE TOOL for metal workers for bending & shaping metals, driving punches and setting rivets etc.
- Fully forged head hardened 50-58 HRC



SIZES

◆ 4 oz × 11"	113 gm × 275 mm
8 oz × 12"	226 gm × 300 mm
12 oz × 13"	340 gm × 330 mm
16 oz × 13"	450 gm × 330 mm
★ 24 oz × 14"	680 gm × 350 mm
★ 32 oz × 14"	900 gm × 350 mm
◆ 40 oz × 16"	1134 gm × 400 mm
48 oz × 16"	1360 gm × 400 mm

★ **Bestseller** ◆ New

BALL PEIN HAMMER

NEW!

TITANIUM HEAD

BPHW-TI

- 18 oz. forged titanium head
- Lightweight titanium head reduces fatigue, yet driving force equals a 32 oz. steel hammer
- Less recoil shock than steel hammer



SIZE

18 oz × 14"	510 gms × 350 mm

BLACKSMITH'S / CROSS PEIN HAMMERS

BS 876
For material, hardness & performance

B107.400-2018

BHHW

- Cross Pein hammers are used in metal working, blacksmithing & in stone work
- Hammer heads are forged from special steel & induction hardened to 50-58 HRC



SIZES

2.5 lbs × 14"	1.1 kg × 350 mm
★ 4 lbs × 14"	1.8 kg × 350 mm

★ **Bestseller**

TIRE SERVICE HAMMER

NEW!

THHW

- Ideal for mounting and dismantling tires on passenger car, truck, bus, tractors and aircrafts
- Forged head from fine-grained steel on one end & solid rubber face on other end delivers a firm blow with minimal rebound
- Rubber head is designed for driving on or off lock rings without damage to the rim
- Genuine Hickory wood handle for high energy transfer & reduced vibrations



SIZE	
5.5 lbs × 16"	2.5 kg × 400 mm

FRAMING HAMMER

TITANIUM HEAD

NEW!

FMHW-TI

- 14 oz forged titanium head
- Lightweight titanium head reduces fatigue yet the driving force equals a 24 oz steel hammer
- Less recoil shock than steel hammers



SIZE	
14 oz × 18"	395 gms × 450 mm

FRAMING HAMMERS

NEW!

- Framing Hammers are also known as nailing hammers with straight claw
- Single piece fully forged heavy duty induction hardened head 50-58 HRC
- Milled face improves grip during striking, while the integrated magnetic nail starter enables easy one-handed nail placement
- Available in two handle types

FHHW-T

Hickory Wood Handle with TPE grip



SIZES	
20 oz × 17"	567 gms × 430 mm
22 oz × 17"	624 gms × 430 mm

FHHW-TM

Hickory Wood Handle with TPE grip & SS overstrike cap: Reinforces the handle at the most impact-prone zone, protecting against damage from accidental overstrikes



SIZES	
20 oz × 17"	567 gms × 430 mm
22 oz × 17"	624 gms × 430 mm

CLAW HAMMERS

NEW!

- Also known as Nailing Hammer, these are used for woodworking, prying & finishing jobs
- Fully forged heavy duty induction hardened head 50-58 HRC
- TPE grip on handle absorbs shock and vibrations and provide non-slip grip
- Available in two handle types:

CLHW-T

- Hickory Wood Handle with TPE grip



SIZE	
16 oz × 17"	450 gms × 430 mm

CLHW-TM

- Hickory wood handle with TPE Grip & SS overstrike cap: Reinforces the handle at the most impact-prone zone, protecting against damage from accidental overstrikes



SIZE	
16 oz × 17"	450 gms × 430 mm

ROOFING HAMMERS

NEW!

- Fully forged heavy duty induction hardened head 50-58 HRC
- Magnetic nail slot for easy one-handed nail placement
- Long pointed claw for installing, aligning & fixing roofing shingles, removing nails and puncturing materials during roof maintenance
- Available in two handle types:

RFHW-T

- Hickory Wood Handle with TPE grip & nail groove



SIZE	
600 gms × 428 mm	

RFHW-TM

- Hickory wood handle with TPE grip & SS overstrike cap: Reinforces the handle at the most impact-prone zone, protecting against damage from accidental overstrikes



SIZE	
600 gms × 428 mm	

AUTO BODY REPAIR HAMMER KITS

HICKORY WOOD HANDLE

KIT-BFT

- Popularly known as Fender Hammer Kits, these are ideal for pounding out auto sheet metal
- Hammers and dollies are suited for flattening metal panels, removing dings and dents and shrinking metal for repairs
- Also available as individual items





4 pc Set Includes :
- Utility Pick Hammer
- General Purpose Pick Hammer
- Cross Chisel Curved Hammer
- Door Skin Hammer



7 pc Set Includes :
- Utility Pick Hammer
- Cross Chisel Curved Hammer
- Cross Chisel Shrinking Hammer
- Heel Dolly
- Utility Dolly
- Thin Toe Dolly
- Light Dinging Spoon

HAMMERS

PICK HAMMERS	CROSS CHISEL CURVED HAMMER	CROSS CHISEL SHRINKING HAMMER	DOOR SKIN HAMMER	BUMPER HAMMER
				NEW! 
• Comes with a round striking face on one end and a blunt pointed pick • For bumping when or while metal is covered with sound proofing material • Face dia.: 1-1/2" (38 mm)	• Comes with a round striking face and a curved cross chisel on the other end • The flat round face is ideal for finishing jobs, the curved chisel end is used for working in sharp corners around moulding • Face dia.: 1-1/2" (38 mm) • Hardened chisel length: 1" (25 mm)	• Comes with a round serrated shrinking face on one end and a straight chisel on the other • Serrated face is used to shrink metal areas • Round face used for shrinking metal while cross chisel for straightening trim pieces or forming metal in tight corners • Hardened chisel length: 1" (25 mm) • Shrinking face dia.: 1-1/2" (38 mm)	• Medium crown head with 20° offset and 3-1/2" radius for working on narrow flanges against the door structure • High crown straight head with 1-5/16" radius for finishing thin sections without poking holes	• Comes with a round serrated shrinking face on one end & flat square face on other • Serrated face is used to shrink metal areas • Square face is used for flattening & removing imperfection especially in corners • Round face diameter: 1-1/4" • Square face: 1-3/16" x 1-3/16"

DOLLIES

HEEL DOLLY	UTILITY DOLLY	THIN TOE DOLLY
		
• Ideal for general reshaping of contoured panels & raising low spots	• Used for general panel beating & ideal for reshaping crowned panels	• Lightweight for thinner panels • Good for low clearance areas

SPOON

LIGHT DINGING SPOON

• Thin and light to smooth out ridges • Use with dinging hammer to spread the blow or by slapping

RUBBER MALLETS

MLTR

Used as a soft striking tool in automotive industrial, DIY, Carpentry, Garden, Landscaping applications

AVAILABLE WITH
- 14" Fibreglass Handle
- 14" Hickory Wood Handle
- 14" Beach Wood Handle



Black head for use in damp conditions or outdoors

HEAD WEIGHT
16 oz (453 gm)
20 oz (567 gm)
32 oz (907 gm)



White head will not discolour or leave marks on work surface

HEAD WEIGHT
16 oz (453 gm)
20 oz (567 gm)
32 oz (907 gm)

NEW!



Dual head design with features of black and white head

HEAD WEIGHT
16 oz (453 gm)
24 oz (680 gm)
32 oz (907 gm)

INTERCHANGEABLE FACE MALLETS

APPLICATION:
1. Light Engineering Jobs
2. Injection Moulding
3. Denting & Painting
4. Assembly & Fitting in automotive workshops
5. Jewellery Making

HMR-SF

Mallet with Plastic & Rubber head



Plastic head

Rubber head

HMR-ST

Mallet with Plastic & Rubber head fitted, Copper & brass head as spares



Brass Head

Copper Head

COPPER & HIDE MALLETS

NEW!

- Multi-purpose mallets used for striking surfaces that could get damaged by steel head hammers
- Available with
  - Hide Face: Water Buffalo hide absorbs impact & transfers force to the object without any marks
  - Copper faces: For a firm blow without marring the struck surface

UTILITY
- Light Engineering Jobs
- Leather industry
- Assembly & Fitting in automotive workshops

MLTT-FG

Fibreglass Handle



FACE DIA.
1" (25 mm)
1-1/2" (38 mm)
1-3/4" (45 mm)

MLTT-HW

Hickory Wood Handle



FACE DIA.
1" (25 mm)
1-1/2" (38 mm)
1-3/4" (45 mm)


CONFIGURATIONS AVAILABLE



Copper - Copper



Hide - Hide



Copper - Hide

DEAD BLOW HAMMERS

DBFG

- Dead Blow Hammers are used for applications that require a controlled strike without causing damage to the struck surface
- Steel shots in the head create a dead blow effect for sustained impact & maximum force without rebound
- Convex striking faces resist chipping & splitting
- Dual injection moulded fibreglass handle for controlled and balanced swing



Hollow head fitted with steel shots create dead blow effect



WEIGHT	FACE DIA.
28 oz	1-29/32" (49.4 mm)
45 oz	2-1/4" (57.4 mm)

REPLACEABLE FACES



Polyurethane



Steel



Copper



Aluminium



Brass



Combination of Polyurethane & Steel

DEAD BLOW HAMMERS

NEW!

STEEL REINFORCED HANDLE

DBPU

- Dead Blow Hammers are used for applications that require a controlled strike without causing damage to the struck surface
- Hollow head filled with steel shots create a dead blow effect, reducing rebound while sustaining impact, maximizing force and absorbing shock
- Polyurethane striking face resists chipping and splitting
- Steel-reinforced polyurethane handle with TPE grip provides strength and resists damage from overstrikes



SIZES

16 oz × 11"	450 gm × 280 mm
24 oz × 12"	680 gm × 315 mm
32 oz × 13"	900 gm × 340 mm
48 oz × 14"	1360 gm × 365 mm

DEAD BLOW BALL PEIN HAMMERS

NEW!

STEEL REINFORCED HANDLE

PBDB

- The power of Ball Pein and Dead Blow Hammer in one.
- A MUST HAVE TOOL for metal workers for bending and shaping metals, driving punches and setting rivets etc.
- Hollow head filled with steel shots create a dead blow effect, reducing rebound while sustaining impact, maximizing force and absorbing shock
- Steel-reinforced polyurethane handle with TPE grip provides strength and resists damage from overstrikes



SIZES

16 oz × 12"	450 gm × 315 mm
24 oz × 12"	680 gm × 315 mm
32 oz × 14"	900 gm × 365 mm

AXE INDESTRUCTIBLE HANDLE

AXID

- Designed for cutting medium to large sized logs with maximum efficiency
- Fully forged heavy duty induction hardened head 50-58 HRC
- 2 Spring Steel bars are locked into the head with a steel locking plate, eliminating loosening or dislodging



SIZE

1.25 lbs × 14"	0.5 kg × 350 mm

AXES FIBREGLASS HANDLE

ASME B107.400-2018

AXE-FG

- Fully forged heavy duty induction hardened head 50-58 HRC
- Polished edge for long lasting sharpness
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZES

1.25 lbs × 14"	0.5 kg × 350 mm
4 lbs. × 36"	1.8 kg × 900 mm

AXES HICKORY WOOD HANDLE

ASME B107.400-2018

AXE-HW

- Fully forged heavy duty induction hardened head 50-58 HRC
- Polished edge for long lasting sharpness
- Genuine hickory wood handle for high energy transfer & reduced vibrations



SIZES

1.25 lbs × 14"	0.5 kg × 350 mm
4 lbs × 36"	1.8 kg × 900 mm

MAULS FIBREGLASS HANDLE

ASME B107.400-2018

MAUL-FG

- Fully forged heavy duty induction hardened head 50-58 HRC
- Special head design:
- 1. Splitting Face: for splitting big logs
- 2. Driving Face: for driving wedges & stakes
- Double Injection moulded handle with 25% wider neck for increased strength & overstrike protection



SIZES

4.5 lbs × 36"	2 kg × 900 mm
6 lbs × 36"	2.7 kg × 900 mm
8 lbs × 36"	3.6 kg × 900 mm

MAULS HICKORY WOOD HANDLE

ASME B107.400-2018

MAUL-HW

- Fully forged heavy duty induction hardened head 50-58 HRC
- Special head design:
  1. Splitting Face: for splitting big logs
  2. Driving Face: for driving wedges & stakes



SIZES

4.5 lbs × 36"	2 kg × 900 mm
6 lbs × 36"	2.7 kg × 900 mm
8 lbs × 36"	3.6 kg × 900 mm

SPLITTING WEDGE

NEW!

WDG

- Ideal for splitting small to medium-sized logs
- Tapered head design allows for easy start, while the two fins enable the wedge to drive deeper below the wood line for effective splitting
- Powder-coated steel body



SIZE	
5 lbs	2.4 kg

AXE SHARPENER

AXE-SPR

- A must have tool for Axe and Maul owners, this sharpener helps in quick re-sharpening of the blade
- Move the blade forward & backward on the ceramic rollers for quick and accurate resharpening
- Non slip pads on base for stability while sharpening
- Engineered plastic construction makes it strong & durable





PUNCHES & CHISELS

PIN PUNCHES HEAVY DUTY

PP-HD

- Carbon steel construction with hexaganal shank
- Hardened 52-58 HRC

REGULAR

PIN DIAMETER
1/16" (1.5 mm)
3/32" (2.5 mm)
1/8" (3 mm)
5/32" (4 mm)
3/16" (5 mm)
7/32" (5.5 mm)
1/4" (6 mm)
5/16" (8 mm)
3/8" (10 mm)



EXTRA LONG
8" (200 mm) long

PIN DIAMETER
1/8" (3 mm)
3/16" (5 mm)
1/4" (6 mm)
5/16" (8 mm)
3/8" (10 mm)



PIN PUNCHES ROUND SHANK

- Carbon steel construction with circular shank
- Hardened 52-58 HRC

PP
4" (100 mm) long

PIN DIAMETER
1/16" (1.5 mm)
3/32" (2.5 mm)
1/8" (3 mm)
5/32" (4 mm)
3/16" (5 mm)
7/32" (5.5 mm)
1/4" (6 mm)
5/16" (8 mm)



PPR
6" (150 mm) long

PIN DIAMETER
1/16" (1.5 mm)
3/32" (2.5 mm)
1/8" (3 mm)
5/32" (4 mm)
3/16" (5 mm)
7/32" (5.5 mm)
1/4" (6 mm)
5/16" (8 mm)
3/8" (10 mm)



DDP
8" (200mm) long
Two piece construction

PIN DIAMETER
1/16" (1.5 mm)
3/32" (2.5 mm)
1/8" (3 mm)
5/32" (4 mm)
3/16" (5 mm)
1/4" (6 mm)
5/16" (8 mm)
3/8" (10 mm)



CENTRE PUNCHES

- Centre punches are used for marking metal indentation on a work piece before drilling
- Hardened 52-58 HRC

CP-HD

Centre Punches - Heavy Duty
Carbon steel construction with hexagonal shank



POINT SIZES
5/64" (2 mm)
1/8" (3 mm)
5/32" (4 mm)
1/4" (6 mm)
3/8" (10 mm)

CP

Centre Punches - Round Shank
Carbon steel construction
Knurled anti-slip grip



POINT SIZES
1/16" (1.5 mm)
5/64" (2 mm)
3/32" (2.5 mm)
1/8" (3 mm)
9/64" (3.5 mm)
5/32" (4 mm)
3/16" (5 mm)
7/32" (5.5 mm)
1/4" (6 mm)

STARTING PUNCHES HEAVY DUTY

SGP-HD

- Used as a starting tool prior to using Pin Punches, these are useful for loosening frozen or tight pins and keys or knocking out rivets
- Carbon steel construction with hexagonal shank
- Hardened 52-58 HRC



POINT SIZES
1/16" (1.5 mm)
3/32" (2.5 mm)
1/8" (3 mm)
5/32" (4 mm)
3/16" (5 mm)
7/32" (5.5 mm)
1/4" (6 mm)
5/16" (8 mm)
3/8" (10 mm)
1/2" (12 mm)

DRIFT PUNCHES HEAVY DUTY

DFP-HD

- Drift Punches, also called Alignment Punches are used to line up holes in metals and for drawing pins through various assemblies
- Single piece carbon steel construction with hexagonal shank
- Hardened 52-58 HRC



TIP DIAMETER
3/32" (2.5 mm)
1/8" (3 mm)
5/32" (4 mm)
3/16" (5 mm)
7/32" (5.5 mm)
1/4" (6 mm)
5/16" (8 mm)
3/8" (10 mm)
1/2" (12 mm)

DRIFT PUNCHES BRASS

DFP-BR

- Ideal for delicate work on soft materials
- Also called Alignment Punches, these are used to line up holes in metals and for drawing pins through various assemblies
- Circular shank
- Overall Length: 5-13/16" (147 mm)



TIP DIAMETER
1/4" (6 mm)
3/8" (10 mm)
1/2" (12 mm)
5/8" (16 mm)
3/4" (19 mm)

HINGE CENTERING PUNCH

JCP

- For starting and centering screw holes when attaching countersunk hardware such as hinges, brackets, locks & drawer pulls
- Spring action with a hardened steel pin for convenient marking
- Stock Size: 3/8" (10 mm)
- Overall Length: 3" (78 mm)



ROLL PIN PUNCHES HEAVY DUTY

RPP-HD

- Used to remove spring pins/roll pins
- Single piece carbon steel construction with hexagonal shank
- Hardened 52-58 HRC



PIN DIAMETER
3/32" (2.5 mm)
1/8" (3 mm)
5/32" (4 mm)
3/16" (5 mm)
1/4" (6 mm)
5/16" (8 mm)

PRICK PUNCHES HEAVY DUTY

PKP-HD

- Used for precise marking/scoring in metal working applications
- Single piece carbon steel construction with hexagonal shank
- Hardened 52-58 HRC



STOCK SIZE
1/4" (6 mm)
3/8" (10 mm)
1/2" (12 mm)

NAIL PUNCHES

NLP

- Designed for driving nail heads below wood surface & to remove nails
- Two piece carbon steel construction
- Hardened tips 52-58 HRC



PIN DIAMETER
1/32" (0.8 mm)
1/16" (1.5 mm)
3/32" (2.5 mm)
1/8" (3 mm)
5/32" (4 mm)
3/16" (5 mm)

NAIL PUNCHES CUSHION GRIP

NEW!

NLP-G

- With Anti-slip & shock absorbing cushion grip
- Hardened tips 52-58 HRC
- Available as individual & commonly used sets



TIP DIAMETER
1/32" (0.80 mm)
1/16" (1.5 mm)
3/32" (2.5 mm)
1/8" (3 mm)

COLD CHISELS

CHS

Octagonal

- Forged construction with octagonal shank
- Cutting edge hardened 52-58 HRC
- Used for cutting & chipping metals and in stonework
- **Available blade widths:** From 1/4" (6 mm) - 1" (25 mm)

COLD CHISELS



COLD CHISELS WITH GUARD



CRP

Concrete Point

Used for breaking concrete floor, side walk etc.



HOLLOW & ARCH PUNCHES

HPL

- Single piece steel cylindrical construction
- Designed to cut small holes ranging from 3/32" (2 mm) to 1" (25 mm)



HPL-BEL

- Arch/Bell type construction
- Larger form with a long shaft for convenient holding
- Designed to cut holes ranging from 3/16" (5 mm) to 2-3/4" (70 mm)



AUTOMATIC CENTRE PUNCHES

Fully automatic, single hand operated, spring loaded punches


ACP/1B

Steel Punch useful for light marking jobs




ACP/SS/89

Stainless Steel Punch useful for light marking jobs




ACP/77

Aluminium Punch useful for light marking jobs

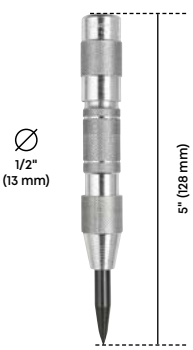


ACP/79

Steel Punch with black oxide finish



ACP/78

HD Steel Punch useful for marking very deep indentations



STEEL STAMPS

Designed for hand held hammer struck applications



52-58 HRC
At Stamping End

35-42 HRC
At Striking End

LP

Letter Punches
27 Piece Set
A-Z, &



Plastic Case

NP

Number Punches
9 Piece Set
0-9



Wooden Case

AVAILABLE SIZES

1/16" (1 mm)
3/32" (2 mm)
1/8" (3 mm)
5/32" (4 mm)
3/16" (5 mm)
1/4" (6 mm)
5/16" (8 mm)
3/8" 10 mm)
1/2" (12 mm)

PUNCH & CHISEL SETS

KIT/24/ST **24** PC



KIT/26/ST **26** PC



KIT/16/ST **16** PC



KIT/14/ST **14** PC



KIT/13/ST **13** PC



KIT/8/ST **8** PC



KIT/7/ST **7** PC



WRECKING & DEMOLITION BARS

WRECKING BARS

WB

- Used for leveraging timber & pulling out nails from timber, dismantling wooden crates etc.
- Forged from octagonal section steel

LENGTH	SECTION
12" (300 mm)	5/8" (16 mm)
16" (400 mm)	5/8" (16 mm)
18" (450 mm)	5/8" (16 mm)
20" (500 mm)	5/8" (16 mm)
24" (600 mm)	3/4" (19 mm)
28" (700 mm)	3/4" (19 mm)
30" (750 mm)	3/4" (19 mm)
36" (900 mm)	3/4" (19 mm)
40" (1000 mm)	3/4" (19 mm)






CONSTRUCTION BARS HEAVY DUTY

HDPR

- Extra long bar for higher leverage
- Forged chrome steel blade welded to a tubular steel bar
- Used to pull, lift, scrape, & wedge metal, wood & stone with less effort

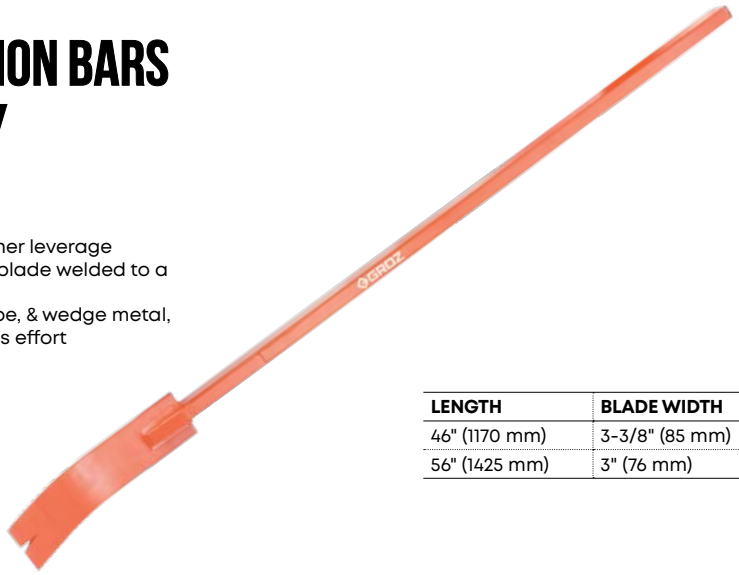

LENGTH	BLADE WIDTH	HANDLE CROSS SECTION
46" (1170 mm)	3-3/8" (85 mm)	1-1/2" × 1" × 5/64" (38 × 25 × 2 mm)
56" (1425 mm)	3" (76 mm)	2" × 1" × 1/8" (51 × 25 × 3 mm)


G-BAR® HEAVY DUTY WRECKING BARS

GBR


- Forged I section steel bar, fully hardened & tempered, for added strength & durability
- Withstands heavy loads without deformation




LENGTH	SECTION
14" (350 mm)	1/2 × 19/32" (12 × 15 mm)
24" (600 mm)	5/8 × 1-3/16" (16 × 30 mm)
36" (900 mm)	5/8 × 1-3/16" (16 × 30 mm)
48" (1200 mm)	5/8 × 1-3/16" (16 × 30 mm)



Regular wrecking bar



Larger bar-to-claw for 2X leverage



Low & thin profile for easy fitment under the surface

POST HOLE DIGGING BAR

PHD

- Heavy duty 1" (25 mm) hex steel bar for higher strength in toughest of jobs
- 2-3/8" (60 mm) mushroom head at one end & bevelled chisel edge at other end

UTILITY:
- Fence post work
- Digging holes
- Breaking up clay
- Cutting through tree roots

SAN ANGELO BAR

SAB

- Heavy duty 1" (25 mm) hex steel bar for higher strength in toughest of jobs
- Pointed tip on one end for breaking top soil and flat tip on opposite end for digging


UTILITY:
- Breaking up concrete & stone
- Prying heavy material
- Digging into difficult soil to cut tree roots & obstacles
- Breaking up rock, clay & concrete



Used in digging into earth



Can easily dig into hard soil



San-Angelo Bar

72" (1820 mm)



69" (1750 mm)

Post Hole Digging Bar


02 tool storage

ROLLING TOOL CABINETS NEW!

S-10D SERIES

S-10 SERIES

TOP OPTIONS




SS | Thermofoam | Rubberized Mat | Wood



CENTRAL LOCKING SYSTEM
High-security lock with 400 key combinations

ERGONOMIC HANDLE
For ease of movement

UV-RESISTANT FINISH
Industrial-grade coating resists fading and corrosion



DRAWERS WITH ANTI-SLIP LINERS
Minimize tool movement & vibrational impact

FULL EXTENSION HETTICH® BALL BEARING SLIDES
Provide complete tool visibility & easy retrieval

RUGGED MOBILITY
4 Heavy-duty castors 5" × 1.25" (125 x 30mm). Rear castors with brakes

S-10D
27 INCH | 7 DRAWER



Trolley weight	48 kg (105 lbs.)
Avg. Drawer load capacity	25 kg (55 lbs.)
Trolley load capacity	300 kg (660 lbs.)

S-10D
27 INCH | 5 DRAWER



Trolley weight	43 kg (95 lbs.)
Avg. Drawer load capacity	25 kg (55 lbs.)
Trolley load capacity	300 kg (660 lbs.)


S-10
27 INCH | 7 DRAWER



Trolley weight	64 kg (140 lbs.)
Avg. Drawer load capacity	25 kg (55 lbs.)
Trolley load capacity	400 kg (880 lbs.)

S-20
SERIES

TOP OPTIONS




SS | *Thermofoam | Rubberized Mat | Wood



CENTRAL LOCKING SYSTEM
High-security lock with 400 key combinations

BUILT TO ENDURE
1.2 mm (18 gauge) heavy steel sheet construction



DRAWERS WITH ANTI-SLIP LINERS
Minimize tool movement & vibrational impact

ERGONOMIC HANDLE
For ease of movement

UV-RESISTANT FINISH
Industrial-grade coating resists fading and corrosion

FULL EXTENSION HETTICH® BALL BEARING SLIDES
Provide complete tool visibility & easy retrieval

RUGGED MOBILITY
4 Heavy-duty castors 5" × 1.25" (125 x 30mm). Rear castors with brakes

* Only on 27" models

27 INCH | 7 DRAWER



Trolley weight.	71 kg (156.5lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	500 kg (1100 lbs.)

27 INCH | 5 DRAWER



Trolley weight.	65 kg (143 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	500 kg (1100 lbs.)

29 INCH | 7 DRAWER

With perforation sheet & document holder



Trolley weight.	80 kg (176 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	500 kg (1100 lbs.)

29 INCH | 7 DRAWER

With lockable side cabinet



Trolley weight.	83 kg (183 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	500 kg (1100 lbs.)

35 INCH | 6 DRAWER + TOP LID

Drawers with latch opening



Trolley weight	100 kg (220 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	500 kg (1100 lbs.)

35 INCH | 5 DRAWER + TOP LID

With front power tool cabinet & drawers with latch opening



Trolley weight	105 kg (230 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	500 kg (1100 lbs.)

42 INCH | 7 DRAWER

With perforated sheet on left & document holder on right side



Trolley weight	100 kg (220 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	600 kg (1320 lbs.)

42 INCH | 11 DRAWER



Trolley weight	96 kg (211.5 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	750 kg (1650 lbs.)

42 INCH | 11 DRAWER


With lockable side cabinet



Trolley weight	104 kg (229 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	600 kg (1320 lbs.)

S-30
SERIES

TOP OPTIONS



SS | Thermofoam | Rubberized Mat | Wood

CENTRAL LOCKING SYSTEM
High-security lock with 400 key combinations

REINFORCED SIDE BUMPERS
For corner protection

BUILT TO ENDURE
1.2 mm (18 gauge) heavy steel sheet construction



DRAWERS WITH ANTI-SLIP LINERS
Minimize tool movement & vibrational impact



ERGONOMIC HANDLE
For ease of movement

UV-RESISTANT FINISH
Industrial-grade coating resists fading and corrosion

PULL TO OPEN SAFETY LATCH
Secure drawers. Zero accidental opening

FULL EXTENSION HETTICH® BALL BEARING SLIDES
Provide complete tool visibility & easy retrieval

RUGGED MOBILITY
4 Heavy-duty castors 5" × 2" (125 x 50mm). Rear castors with brakes

27 INCH | 7 DRAWER



Trolley weight	76 kg (167 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	500 kg (1100 lbs.)

35 INCH | 5 DRAWER + TOP SLIDE



Trolley weight	100 kg (220 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	500 kg (1100 lbs.)

35 INCH | 6 DRAWER + TOP LID

With electric socket, screwdriver holder & document holder



Trolley weight	105 kg (230 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	500 kg (1100 lbs.)

TOOL TROLLEY KITS NEW!

AUTOMOTIVE TOOL KITS

- Automotive Tool Kit comes in a 7 drawer rolling tool cabinet (RTC/27-10D/1/GRZ)
- A versatile set with an organized layout, makes it convenient to find tools
- Ideal for maintenance and service work on automobiles
- Available in:

  65 PIECE

  84 PIECE

  149 PIECE



UNIVERSAL TOOL KIT- 170 PCS

- 170 Pc universal tool kit comes in a 7 drawer rolling tool cabinet (RTC/27-10/1/GRZ)
- A versatile set with an organized layout, makes it convenient to find tools
- Ideal for maintenance and service work on automobiles



TOOL BOXES

CANTILEVER TOOL BOX

- All steel construction
- Works on full spread cantilever mechanism
- **Load bearing capacity**
  77 lbs. (35 kg)

MTB-5

5 Trays
Tool Box only



MTB-5T

5 Trays
Tool box with wheeled trolley



35 INCH | 3 DRAWER + BOTTOM SHELF + TOP LID

With electric socket



Trolley weight	70 kg (154 lbs.)
Avg. Drawer load capacity	45 kg (100 lbs.)
Trolley load capacity	400 kg (880 lbs.)

CANTILEVER TOOL BOX HEAVY DUTY

NEW!

- Manufactured from heavy gauge steel sheet
- Corrosion resistant powder coated finish
- Works on full spread cantilever mechanism

MTB-3L

3 Trays
Load Bearing Capacity: 18 kg (40 lbs)





MTB-5L

5 Trays
Load Bearing Capacity: 30 kg (65 lbs)





MINI TOOL BOX WITH LID

NEW!

TCHL

- Ideal for organizing small tools like nuts, bolts, grease fittings & caps, spanners, screwdrivers, voltage testers etc.
- Manufactured from 0.60 mm (24 gauge) steel with corrosion resistant glossy powder coated finish
- **Hettich® ball bearing slides**
- Two drawers and a top compartment with lid that opens at 90°
- **Max Load Capacity:** 4.5 kg (10 lbs)
- **Average Drawer Load Capacity:** 2.2 kg (5 lbs.)



AVAILABLE IN 7 COLOURS

- Classic Black
- Cool Grey
- Bossy Blue
- Fiery Red
- Royal purple
- Aqua Lux
- Vibrant Orange

TOOL CHESTS

S-10 SERIES

- UV-Resistant Powder-Coated Finish: Prevents fading & corrosion over time
- Full-Extension Drawers with Hettich® Slides: Smooth, 100% opening for full visibility. Anti-slip liners reduce vibration & protect tools
- Central Locking System: High-security lock with 400 key combinations

27 INCH | 3 DRAWER



Chest weight	22 kg (48.5 lbs.)
Avg. drawer load capacity	25 kg (55 lbs.)
Chest load capacity	150 kg (330 lbs.)

20 INCH | 3 DRAWER + TOP COMPARTMENT

Japanese Style
Metal latch closure



Chest weight	12 kg (26.5 lbs.)
Avg. drawer load capacity	25 kg (55 lbs.)
Chest load capacity	100 kg (220 lbs.)

S-30 SERIES

- UV-Resistant Powder-Coated Finish: Prevents fading & corrosion over time
- Full-Extension Drawers with Hettich® Slides: Smooth, 100% opening for full visibility
- All drawers with latch opening
- Anti-slip liners reduce vibration & protect tools
- Central Locking System: High-security lock with 400 key combinations
- Trunk style handle

27 INCH | 3 DRAWER



Chest weight	30 kg (66 lbs.)
Avg. drawer load capacity	45 kg (100 lbs.)
Chest load capacity	250 kg (550 lbs.)

NEW!

S-20 SERIES

- UV-Resistant Powder-Coated Finish: Prevents fading & corrosion over time
- Full-Extension Drawers with Hettich® Slides: Smooth, 100% opening for full visibility. Anti-slip liners reduce vibration & protect tools
- Central Locking System: High-security lock with 400 key combinations
- Trunk style handle

27 INCH | 7 DRAWER + TOP LID



Chest weight	46 kg (101 lbs.)
Avg. drawer load capacity	45 kg (100 lbs.)
Chest load capacity	500 kg (1100 lbs.)

27 INCH | 4 DRAWER + TOP HUTCH



Chest weight	39 kg (86 lbs.)
Avg. drawer load capacity	45 kg (100 lbs.)
Chest load capacity	350 kg (770 lbs.)

42 INCH | 5 DRAWER + TOP HUTCH



Chest weight	60 kg (132 lbs.)
Avg. drawer load capacity	45 kg (100 lbs.)
Chest load capacity	450 kg (990 lbs.)

27 INCH | 7 DRAWER + TOP LID



Chest weight	48 kg (105 lbs.)
Avg. drawer load capacity	45 kg (100 lbs.)
Chest load capacity	500 kg (1100 lbs.)

27 INCH | 4 DRAWER + TOP HUTCH



Chest weight	41 kg (90 lbs.)
Avg. drawer load capacity	45 kg (100 lbs.)
Chest load capacity	350 kg (770 lbs.)

42 INCH | 5 DRAWER + TOP HUTCH



Chest weight	74 kg (163 lbs.)
Avg. drawer load capacity	45 kg (100 lbs.)
Chest load capacity	450 kg (990 lbs.)

WORK BENCHES — NEW!

S-20 SERIES

- Heavy-Duty Construction: 14-gauge mild steel frame handles
- Welded Worktop with End Stops: 5/64" (2 mm) thick top with Integrated back & side stops prevent parts from rolling off
- Adjustable Foot Pads: Stable on uneven surfaces
- Lower Storage Shelf: Keeps tools & parts within easy reach
- Powder-Coated Finish: Rust & corrosion -resistant
- Easy to Assemble: Knocked-down delivery with manual & hardware included

60 INCH
Load Capacity: 545 kg (1200 lbs)



79 INCH
Load Capacity: 545 kg (1200 lbs)



SERVICE CARTS — NEW!

S-20 SERIES

- UV-Resistant Powder-Coated Finish: Prevents fading & corrosion over time
- Full-Extension Drawers with Hettich® Slides: Smooth, 100% opening for full visibility. Anti-slip liners reduce vibration & protect tools
- Central Locking System: High-security lock with 400 key combinations
- Lower Storage Shelf: Keeps tools & parts within easy reach
- Rugged Mobility: 4 heavy-duty castors 4" x 1.25" (100mm × 30mm). Rear castors with brakes for added safety
- Ergonomic Handle: Ensures easy movement & control

30 INCH | 1 DRAWER + 1 OPEN SHELF



Cart weight	29 kg (63 lbs.)
Cart load capacity	250 kg (550 lbs.)

30 INCH | 2 OPEN SHELVES



Cart weight	18 kg (40 lbs.)
Cart load capacity	150 kg (330 lbs.)

30 INCH | 3 OPEN SHELVES



Cart weight	23 kg (50 lbs.)
Cart load capacity	300 kg (660 lbs.)

TOUGH STORAGE FOR DEMANDING ENVIRONMENTS

MAGNETIC TOOL HOLDERS

FLEXIBLE


8 NEODYMIUM MAGNETS

- Strong magnetic tool holder keeps all your tools organized and within reach
- **Powerful 8 neodymium (N52) rare earth magnets with chemical resistant & flexible non-marring polyurethane covering**
- Fits onto any tool trolley & metal surface
- Available in black, blue, green, orange, red, yellow

MTH-8

Regular
Hold sockets, wrenches & other tools upto 7/8" (22 mm) dia.



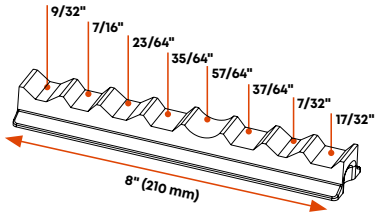




MTH-14

Extra Large
Hold sockets, wrenches & other tools upto 1-3/8" (35 mm) dia.



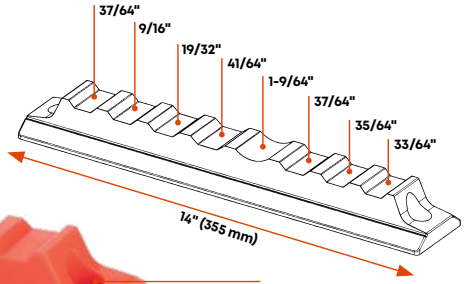

Carabiner Hole



MAGNETIC TOOL HOLDERS

- Keep your tools organized in garages, basement, offices, workshops, studios, kitchen surfaces etc.
- Ferrite magnets are equally distributed for even magnetic impact
- Easy installation by using standard screws & anchors (included)

MTH-24

Length: 24" (600 mm)

MTH-16

Length: 16" (400 mm)

MTH-12

Length: 12" (300 mm)





FOLDABLE MAGNETIC PADS

MPAD

- Strong durable ferrite magnets
- Vinyl construction with reinforced stitched nylon border
- Pad can be attached to any ferrous surface



SIZES

5-1/2" (140 mm) × 18" (447 mm)
8" (210 mm) × 11" (280 mm)
11" (280 mm) × 19" (480 mm)

POWER & AIR TOOLS HOLDER - MAGNETIC

MPT NEW!

- Magnetic Power and Air Tool Holder keeps power tools ready for use
- N52 neodymium rare earth magnets
- Holder easily attaches to the side wall of the tool trolley via three strong neodymium magnets and securely hooks onto the rim of the trolley
- Three mould configuration securely holds two standard size power tools & one jumbo size power tool





MAGNETIC CAN HOLDER

MCH NEW!

- Magnetic can holder securely holds spray cans, spray bottles etc.
- N52 Neodymium rare earth magnets Maximum dia.: 3-11/32" (85 mm)
- Max. Load Capacity: 10 kg (22 lbs)





MAGNETIC HOOK

MHK NEW!

- Designed for secure hanging providing a strong hold & easy positioning on any metallic surface
- Neodymium magnet in center surrounded by ferrite magnets
- Extra-large chrome plated hook swivels 360° for multiple hanging positions
- Max. Load Capacity: 10 kg (22 lbs)





MAGNETIC MATS

NEW!

MMAT

- Perfect solution for keeping all your small & large tools like sockets, bolts, ratchets, screwdrivers etc. all organised in one place
- Vinyl construction prevents damage to metal surfaces
- Mat can be attached to any ferrous surface, horizontally or vertically, even upside down



SIZES


2" (50 mm) × 12" (300 mm)
8" (200 mm) × 11" (280 mm)

MAGNETIC PAPER ROLL HOLDER

NEW!

MGTW

- Magnetic Paper Roll Holder to keep paper towels within reach
- Designed for use on tool carts and cabinets
- Rubber coated ferrite magnets securely attach to any metallic surface without any scratches
- Two-piece clamps accommodate paper rolls of any width

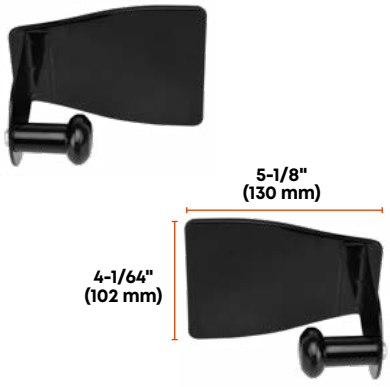



MAGNETIC SCREWDRIVER HOLDER

NEW!

MTRAY

- Easy to access accessory designed for tool carts and cabinets
- Rubber coated ferrite magnets securely attach to any metallic surface without any scratches
- Includes 6 screwdriver holes and base plate to keep your tools handy





MAGNETIC TISSUE BOX HOLDER

NEW!

MGTD

- Magnetic Tissue/ Glove Holder keeps your tissues/ gloves within reach
- 4 Powerful ferrite magnets attach to any metallic surface
- Box can also be wall mounted via key hole provided at the back
- Self-adjusting springs on sides securely hold boxes of different sizes






BUCKET ORGANISER 5 GALLON

NTB-5

- **Comes with 30 pockets:**
- 12 small & 18 large with 22 exterior & 8 interior pockets
- Additional 3 interior loops for holding hammers, pry bars & drills
- Fits most 3-5 gal. (20 litre) buckets



***Bucket & tools not included**

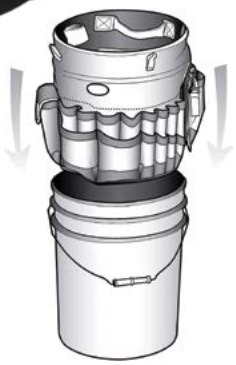

TOOL BAGS

NYLON TOOL BAGS

NTB-3

- **Medium**
- **Load Capacity:** 10 kg (22 lbs)



NTB-1

- **Large**
- **Load Capacity**: 30 kg (66 lbs)



NTB-2

- **X-Large**
- **Load Capacity**: 60 kg (132 lbs)



BACK PACK

NTB-4

Multiple pocket & division for organised tooling









TORQUE WRENCHES

RATCHETING TORQUE WRENCHES

TQW-RT

- Chrome Vanadium body with Chrome Molybdenum alloy steel square drive
- Accurate to ± 4% of reading
- **Graduated dual scale** Nm/ ft-lb
- **Square drive sizes** 3/8", 1/2", 3/4" & 1"
- **Torque Range** 5-1000 Nm
- Comes with calibration certificate



SET MODE Adjustment Ring in unlocked position for setting Torque value



USE MODE Adjustment Ring in locked position



RATCHETING TORQUE WRENCHES PROFESSIONAL

NEW!

DIN 6789 **ASME B107**

For material, hardness & performance

- Chrome Molybdenum alloy sq. drive
- 11-1/4° angle engagement
- **Accuracy:** ± 4% (CW), ± 6% (CCW)
- Each unit is individually serial numbered & comes with calibration certificate

SIZES

DRIVE SIZE	NO. OF TEETH	TORQUE RANGE
*1/4"	64	2-10 Nm
		5-25 Nm
		10-50 Inch-lbs
		40-200 Inch-lbs
3/8"	32	20-100 Nm
		20-142 Nm
		20-100 ft-lbs
1/2"	32	40-200 Nm
		60-340 Nm
		30-150 ft-lbs
		50-250 ft-lbs
		60-300 ft-lbs
3/4"	36	150-800 Nm
		120-600 ft-lbs


***Only available with aluminium grip**

TQ-10

Standard Torque Wrench

TQ-20

Flexible Head Torque Wrench Rotates head upto 20°





Aluminium Grip



Cushion Grip

CLASSIC TORQUE WRENCHES

DIN 6789

For material, hardness & performance

TQW-CL

- Compact design
- **Reversible Square Drive** Change the direction by pushing the square drive to the opposite side
- Accurate to ± 4% of reading
- Loud click sound comes on reaching required torque value
- **Square drive sizes:** 3/8", 1/2", 3/4" & 1"



ALUMINIUM TORQUE WRENCHES

DIN 6789

For material, hardness & performance

TQW-AL

- Light weight aluminium wrench with CrMo square drive
- **Length independent**
- No matter where the force is applied the torque accuracy remains within ±4% accuracy
- **Dual scale window:** Nm & ft-lb.
- **Square drive sizes:** 3/4" & 1"



TORQUE EXTENSIONS

NEW!

TQE

- 1/2" Drive, Chrome Molybdenum construction
- Prevents over-tightening of wheel lug nuts, distortion of wheels, drums & rotors
- Color coded and engraved with max torque for quick identification



KIT INCLUDES

TORQUE RANGE	TORQUE RANGE
65 ft-lb (90 Nm)	110 ft-lb (150 Nm)
75 ft-lb (100 Nm)	120 ft-lb (160 Nm)
80 ft-lb (110 Nm)	135 ft-lb (185 Nm)
90 ft-lb (120 Nm)	140 ft-lb (190 Nm)
100 ft-lb (135 Nm)	150 ft-lb (205 Nm)

TORQUE MULTIPLIERS

TQM

- CrV body with CrMo square drive & reaction bar
- Torque multiplicative factor reduces operator effort by upto 75%
- **Torque options**
  1500Nm (1100 ft-lb.) & 3000 Nm (2200 ft-lb)



DIGITAL TORQUE ADAPTOR

WITH TYRE PRESSURE GAUGE

TQA

ISO 6789

- Digital Torque Adaptor comes with an in-built Tyre Pressure Gauge making it a must have for every mechanic
- Large easy to read LCD display with backlight & a resolution of 0.1 Nm (0.1 lb-ft) / 0.1 PSI
- **Measures Torque in 5 units**
  Nm, Lb-ft, kg-m, kg-cm, in-ft
- **Measure Pressure in 4 Units:** PSI, Kpa, Bar, kg-cm
- Memory function that can store up to 50 readings
- Works with 2 AAA batteries with a life of 50 continuous working hours




04 automotive tools

CAT / ALIGNING BARS

CAT

- Forged chrome alloy steel bars
- Hardened 38-43 HRC
- Prying end is on one side with lining up end on other

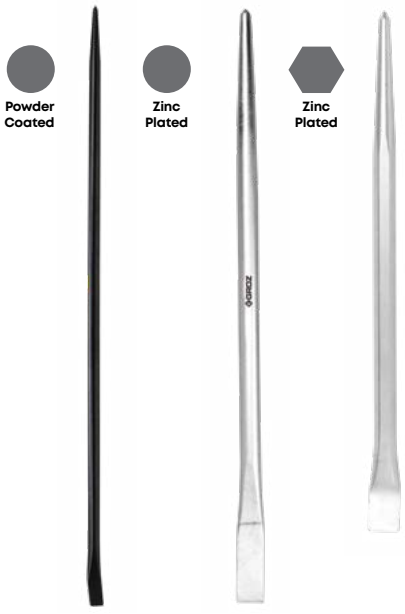

LENGTH	STOCK SIZE	FINISH
ROUND SECTION BARS		
16" (400 mm)	5/8" (16 mm)	Zinc Plate
18" (450 mm)	5/8" (16 mm)	Zinc Plate
24" (600 mm)	3/4" (19 mm)	Zinc Plate
30" (750 mm)	7/8" (22 mm)	Zinc Plate
36" (900 mm)	7/8" (22 mm)	Zinc Plate
48" (1200 mm)	1" (25 mm)	Powder Coat
54" (1350 mm)	1" (25 mm)	Powder Coat
HEXAGONAL SECTION BAR		
16"(400 mm)	5/8"(16 mm)	Zinc Plate

ROLL HEAD / LADY FOOT PRY BARS

PRY

- Fully forged from chrome steel
- Hardened 38-43 HRC
- Designed for heavy prying & fulcrum prying in automotive applications
- Tapered end is useful for aligning applications
- Also available as set of 3 or 4 pry bars



LENGTH	STOCK SIZE
6" (150 mm)	5/16" (8 mm)
★ 12" (300 mm)	7/16" (11 mm)
★ 16" (400 mm)	9/16" (14 mm)
◆ 18" (450 mm)	9/16" (14 mm)
20" (500 mm)	11/16" (17 mm)


★ **Bestseller** ◆ **New**

HANDLED PRY BARS

HPR

- Square section steel construction
- Hardened 38-43 HRC
- LDPE & EVA handle for durability & comfort

LENGTH	SECTION
8" (200 mm)	1/4" (6 mm)
12" (300 mm)	7/16" (11 mm)
18" (450 mm)	7/16" (11 mm)
24" (600 mm)	1/2" (13 mm)
32" (800 mm)	1/2" (13 mm)
36" (900 mm)	5/8" (16 mm)
42" (1066 mm)	5/8" (16 mm)
58" (1473 mm)	5/8" (16 mm)

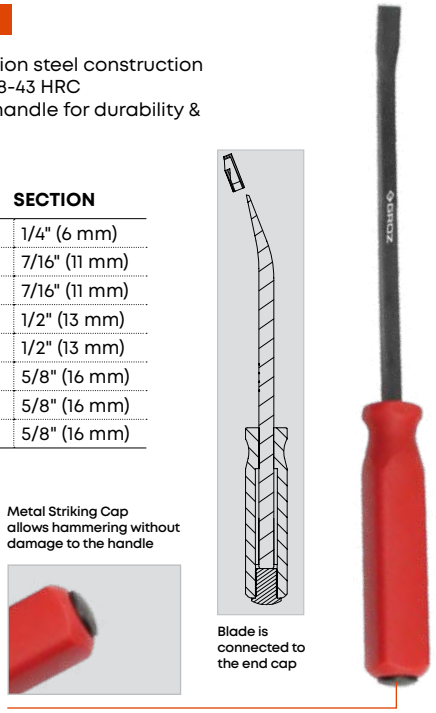

I-BEAM HANDLED PRY BARS

NEW!

HPR-I

- Manufactured from selected steel
- Hardened 38-45 HRC
- Blade runs through the handle to form an end cap providing a solid striking surface
- Available sizes:
  8" (200 mm)
  12" (300 mm)
  18" (450 mm)
  24" (600 mm)
- Also available as a set of 4

40% Higher prying strength



INDEXING PRY BARS

NEW!

IPRY

- Chrome Molybdenum steel construction, hardened 48-52 HRC
- Push Lock Mechanism with head indexable through 225° with 15 incremental angles of 15°
- Ideal for use in engine re-positioning & placement, aligning steel components, removing bearings from housing.



SIZES
8" (200 mm)
12" (300 mm)
16" (420 mm)

POCKET PRY BARS

MPRY NEW!

- High tensile 3/16" diameter alloy steel construction
- Polyacetate handle with stainless steel pocket clip




EXTENDED REACH PIN PUNCHES

HPP

- Chrome steel forged punches
- Hardened 38-45 HRC
- Punch Body extends through the handle & connects with the end cap to provide a solid striking surface
- LDPE & EVA handle for safety & comfort
- **Overall Length**:
  16" (400 mm)
- Also available as set

PIN DIAMETER
1/4"(6 mm)
5/16"(8 mm)
3/8"(10 mm)

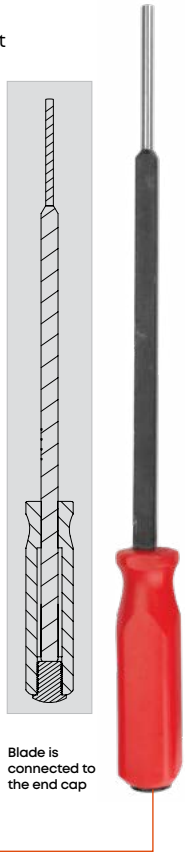

AUTOMOTIVE MAINTENANCE TOOL KIT - 13 PC

NEW!



MPRY-13ST

INCLUDES

- 1 pc Tack Lifter
- 2 pcs Buckle Prying Tools (Small, Big)
- 2 pcs Mini Pry Bars (Straight, Angled)
- 7 pcs Screwdriver S2 steels bits (PH2, PZ2, SL5.5, T20, T25, T27, T30)
- 1/4" hex nut driver (CrV)

TYRE LEVERS

TLVR

Straight pattern tyre levers with hook & taper



LENGTH
16" (400 mm)
21" (530 mm)
24" (600 mm)

HOOK & PICKS

STRAIGHT PICK	COMPLEX PICK	ANGLE/C PICK	COMBINATION PICK	45° PICK	DOUBLE ANGLE PICK	90° PICK	180° HOOK



HOOK & PICK SETS

HKP


- Aluminium body with knurling for non-slip grip
- Tool steel shaft is heat treated 50-58 HRC for increased durability



KIT/HKP/4/ST
4 Pc set in standard 6" (150 mm) length



KIT/HKP/5/ST
5 Pc set in standard 6" (150 mm) length
Includes one threaded body & four interchangeable threaded shafts

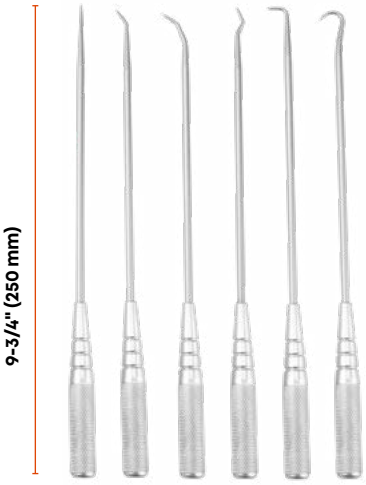

KIT/HKP/6L/ST
6 Pc set in extended reach 9-3/4" (250 mm) length



KIT/HKP/4L/ST
4 Pc set in extended reach 9-3/4" (250 mm) length



HKP/01
Double Sided unit 9-1/2" (240 mm) long



HKP/02/ST
Double Ended Hook & Pick Double Sided Scriber

HOOK & PICK SETS

CUSHION GRIP

HKP-C

NEW!

- Light weight aluminium body
- Heat treated tool steel shaft
- Cushion grip handle for comfortable grip



KIT/HKP/C/4L/ST
4 Pc set



KIT/HKP/C/6L/ST
6 Pc set



KIT/HKP/C/8L/ST
8 Pc set

HOOK & PICK SETS
EXTENDED REACH

HKP-G

NEW!

- Designed for reaching confined spaces and to get the job done with ease
- TPR grip handle for added comfort and leverage
- Hanging hole for safe storage



KIT/HKP/G/4L/ST:
4 pc set: Straight Pick, Complex Pick, 90° Hook & 180° Hook



KIT/HKP/G/6L/ST:
6 pc set: Straight Pick, Complex Pick, Combination Pick, Double Angle Pick, 90° Hook & 180° Hook



KIT/HKP/G/8L/ST:
8 pc set: Straight Pick, Complex Pick, Angle/C Pick, Combination Pick, 45° Pick, Double Angle Pick, 90° Hook & 180° Hook

SERVICE TOOLS


OIL FILTER WRENCHES
SWIVEL TYPE


NEW!

- Heavy Duty Oil Filter wrenches are used to remove oil filters
- Spring steel strap offers high elasticity & flexibility
- Pivoting Handle design: Rotates for better access in tight engine bays, enabling efficient torque application
- Fits oil filters from 2-3/8" to 5-3/4"
- Also available as sets

OFW-10G
TPR Grip

OFW-10
Vinyl Grip

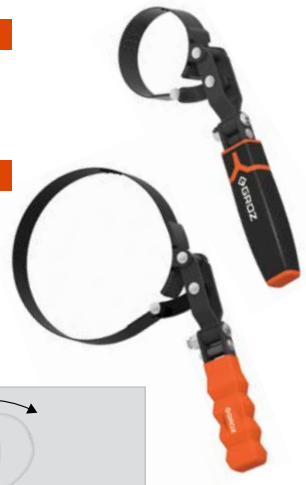



Pivoting design: For better access in tight spaces

SIZES


4-3/4" to 5-3/4"	120 to 146 mm
3-1/2" to 3-7/8"	90 to 98 mm
2-7/8" to 3-1/4"	73 to 83 mm
2-3/8" to 2-5/8"	60 to 67 mm
2-9/16" to 3-1/8"	65 to 79 mm
4" to 4-3/8"	101 to 111 mm

OIL FILTER WRENCHES
CUP TYPE


NEW!

OFW-20

- Cup type Oil Filter Wrench for quick & effortless removal of oil filters
- Durable Steel Construction with black ED coating
- Each cup is designed to match the exact fluting end diameter of specific oil filter models, ensuring a secure, non-slip grip.



SIZES	NO. OF FLUTES	BRANDS
65 mm	14	Toyota, Nissan & Daihatsu
93 mm	36	Ford, BMW & Volvo
65 mm / 67 mm	14	Toyota, Nissan & Daihatsu
74 mm / 76 mm	15	Audi, Rover, Chrysler GM, Wix, Ford & Isuzu
76 mm	14	BMW & Audi
74 mm	15	Audi, Rover & Chrysler
93 mm	15	Mercedes-Benz, BMW, Hyundai, Kia, Ford etc
74 mm	14	Audi, Rover, Chrysler, VW, Mercedes, BMW & Opel
73 mm	15	GM & Chrysler



STRAP WRENCHES

STW

- Aluminium I-beam handle.
- Non marring nylon belt prevents scratching & damage to finished surfaces
- For use with object of dia. 7" (175 mm)
- **Handle Lengths**
  12" (300 mm) & 18" (450 mm)



5 PC SCREW EXTRACTOR SET

SCE

- Manufactured from Chrome Molybdenum Steel
- Ideal for removing broken stubs, pipes, screws & bolts

DRILL SIZES
3-6 mm
6-8 mm
8-11 mm
11-14 mm
14-18 mm



BRASS HAMMERS

BRH

Unique combination of brass head & aluminium handle makes hammer ideal for explosive environment



HEAD WEIGHT
6 oz (0.170 kg)
1 lbs (0.450 kg)
2-1/2 lbs (1.140 kg)
3 lbs (1.360 kg)
4 lbs (1.820 kg)

DRAW BAR HAMMER

DBH

Dual purpose hammer with solid brass head on one side and 3/4" socket on other



GEAR PULLERS

BPL

- Forged Chrome Vanadium jaws
- Heat treated alloy steel cross bolt & head



2 Jaw
Useful for working in compact spaces



3 Jaw
Ensures equal load distribution to slide gears, pulleys & flywheels off shaft without damage

MAX. REACH	SAFE WORKING LOAD	
	2 JAW	3 JAW
3" (75 mm)	2 TON	3 TON
4" (100 mm)	4 TON	6 TON
6" (150 mm)	6 TON	9 TON
8" (200 mm)	10 TON	15 TON

SOLDER CLAMP

NEW!

WST

- Aluminium body
- Holds 2 wires while they are soldered together
- **Soldering wire thickness**
  Upto 3/64" (1.2 mm)
- **Length of solder coil**
  2-9/16" (65 mm)





QUICK CHANGE RATCHETING GEAR PULLERS

BPL-RT

- Forged from Chrome Molybdenum steel
- Jaw can be reversed for internal & external pulling
- Easy switch between 2 jaw & 3 jaw options. No extra tools required



5X SPEED

- ✓ **SPEED**
- ✓ **ACCESS**
- ✓ **STRENGTH**
- ✓ **VERSATILITY**



Anti Slip Grip


MAX. REACH	SAFE WORKING LOAD
3.1" (80 mm)	2 TON
6" (150 mm)	5 TON
8.6" (218 mm)	7 TON

MAGNETIC DRAIN PLUG REMOVER

NEW!

MDR

- Convenient tool to remove oil drain plugs without touching the hot plug or oil
- 7" (175 mm) flexible shaft with magnetic end, that sticks on to the drain plug firmly

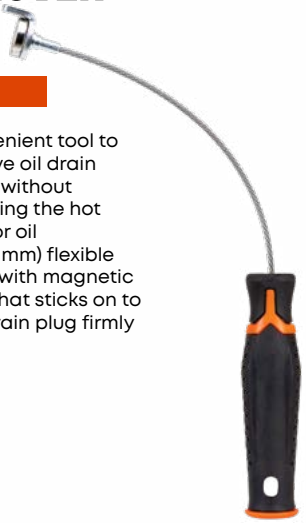

DRILL CHUCK & KEY SET

NEW!

DCK-ST

- Converts pneumatic impact or ratchet tools into a drilling solution
- Dual-end design: square drive on one end, collet on the other
- Attaches to a pneumatic ratchet for drilling in tight spaces
- Interchangeable chucks securely hold various drill bits
- Compact, space-saving, and ideal for automotive and industrial use

Includes
- 1/4" Drill Chuck
- 3/8" Drill Chuck with Key
- 5 Stubby Drill Bits: 1/8", 3/16", 1/4", 5/16", 3/8"





LIFTING EQUIPMENT

HYDRAULIC BOTTLE JACKS

JACK-BT

- Welded design
- 100% factory tested
- "Load Limiting Device" ensures that the jack is not accidentally used beyond rated capacity
- 50% Safety overload factor



- **2 TON**
- **Lift Range** 7" (175 mm) to 13-11/32" (339 mm)
- Passenger Cars, Taxi's



- **4 TON**
- **Lift Range** 7-7/16" (190 mm) to 14-13/16" (368 mm)
- Passenger Cars, Taxi, Pick-Up Trucks, SUV's, MUV's, Vans, LCV's, Mini Trucks



- **12 TON**
- **Lift Range** 9-1/16" (230 mm) to 18-5/16" (465 mm)
- HCV, Trucks (9-24 ton), Buses



- **20 TON**
- **Lift Range** 9-7/16" (240 mm) to 17-11/16" (450 mm)
- HCV, Trucks (24-40 Ton)



- **32 TON**
- **Lift Range** 10-5/16" (260 mm) to 16-9/16" (420 mm)
- Trailers, RV's, Dumpers (40-60 Ton)



- **50 TON**
- **Lift Range** 11" (280 mm) to 17-11/16" (450 mm)
- Dumpers (60-120 Ton)

FLOOR JACK 3 TON

JACK-FL

- **Fast lifting design for quick jumpstart to reach 'lifting point'**
- Extra heavy duty steel body for ultimate stability & rigidity
- Built-in safety valve @120% of rated capacity
- **Weight** 33 kg (73 lbs)
- **Lift Range** 5-1/4" (133 mm) to 18-1/4" (465 mm)

QUICK START
3X FASTER
Fast lifting design for quick jumpstart to reach 'lifting point'



HEXAGON KEY SETS

S2 For steel construction | DIN896

ALN

ALN/HX-BL/7L/GRZ
7 Hex Keys with Ball End Long
Metric: 2.5 mm - 10 mm



ALN/HX-BL/7L/SAE/GRZ
7 Hex Keys with Ball End Long
SAE: 3/32" -3/8"



ALN/HX-BL/9EL/GRZ
9 Hex Keys with Ball End X Long
Metric: 1.5 mm - 10 mm



ALN/TX-TX/9L/GRZ
9 Torx Star Keys Long
T10 - T50



HEXAGON KEY SETS

Chrome Vanadium | DIN896

ALN

ALN/HX-HX/8/GRZ
8 Hexagonal Keys - Metric
1.5 mm - 6 mm



ALN/HX-HX/10/GRZ
10 Hexagonal Keys - Metric
1.5 mm - 10 mm



ALN/HX-HX/10/SAE/GRZ
10 Hexagonal Keys - SAE
1/16" - 3/8"



ALN/HX-HX/7/GRZ
7 Hexagonal Keys - Metric
2.5 mm - 10 mm



ALN/TX-TX/8/GRZ
8 Tamper Torx Star Keys
T9 -T40



ALN/HX-HX/25/GRZ
25 Hexagonal Keys
Metric: 1.5 mm - 10mm
SAE -1/16" - 3/8"



7 PC VDE SCREWDRIVER SET


Chrome Vanadium

1000V SAFE

VDE

SCDR-VDE

Set Includes
a. 4 Pc. Slotted Screwdrivers
1/4" × 6"
7/32" × 5"
5/32" × 4"
1/8" × 4"
b. 2 Pc. Philips Screwdrivers
PH1 × 3-1/8"
PH2 × 4"
c. 1 Pc. 110V - 230V Single-Pole Voltage Tester

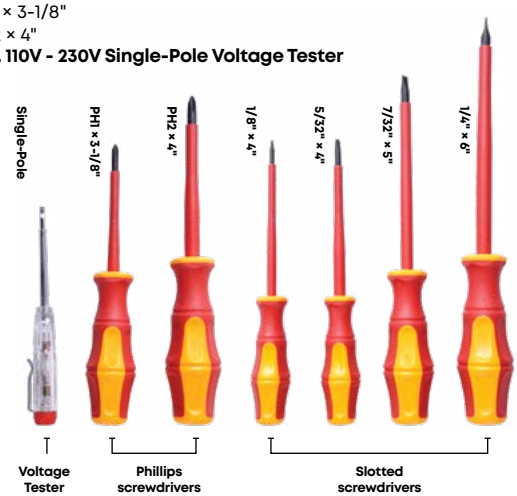


SCREWDRIVERS

CUSHION GRIP

Chrome Vanadium

SCDR-R

Range
a. Slotted
3 x 75mm to 8 x 200mm
b. Philips
PH0 x 75mm to PH3 x 150mm
c. Pozi Bit
PZ1 x 75mm to PZ3 x 150mm
d. Torx Bit
T10 x 100mm to T30 x 100mm

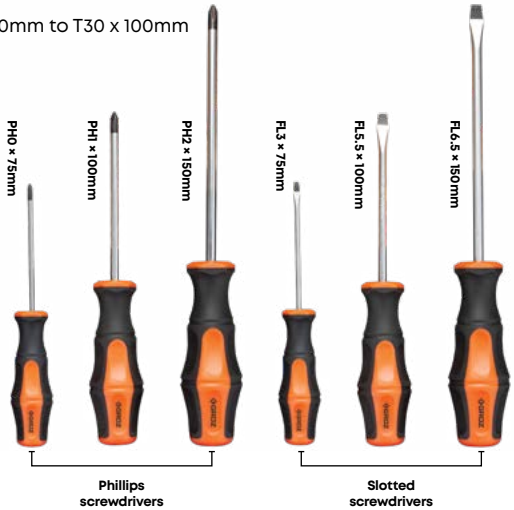

05 sockets & accessories

HAND SOCKETS

HAND SOCKETS

SKT

3X ENHANCED PERFORMANCE AND LIFE

DIN 3120
All GROZ sockets meet or exceed DIN 3120 Standard by 30%

ISO 3315

1/4" DRIVE



Hex Sockets:
4mm to 14mm



Deep Hex Sockets:
5mm to 13mm



Pozi Bit Sockets:
PZ1,PZ2 & PZ3



Hex Bit Sockets:
H3 to H10



Torx Bit Sockets:
T8 to T40



Slotted Bit Sockets:
S4 to S7



Philips Bit Sockets:
PH1, PH2 & PH3

3/8" DRIVE



Hex Sockets:
6mm to 22mm



Bi-Hex Sockets:
6mm to 22mm

1" DRIVE



Hex Sockets:
36mm to 80mm



Bi-Hex Sockets:
36mm to 80mm

1/2" DRIVE



Hex Sockets:
8mm to 36mm

Deep Hex Sockets:
10mm to 32mm



Bi-Hex Sockets:
8mm to 36mm

3/4" DRIVE



Hex Sockets:
22mm to 50mm



Bi-Hex Sockets:
22mm to 50mm



SLIDING T BARS

Designed to provide leverage for tightening nuts & bolts easily



SIZES					
DRIVE	1/4"	3/8"	1/2"	3/4"	1"
LENGTH	4-1/2"	6-1/2"	10"	18"	22"

EXTENSION BARS

Used with sockets to reach into confined spaces



DRIVE SIZES		
1/4"	3/8"	1/2"
3/4"	1"	

FLEX HANDLE / POWER BARS

- Hinged joint head & spring loaded ball bearing joint for secure socket retention
- Chrome Molybdenum square drive



DRIVE SIZES	
3/8"	1/2"
3/4"	1"

SPEEDER HANDLE

Ideal for rapid removal/ insertion of fasteners



DRIVE SIZE
1/2"

UNIVERSAL JOINT

Hinged 180° in both directions, helps user to form corners or to get socket onto inaccessible bolt heads



DRIVE SIZES	
1/4"	3/8"
1/2"	3/4"

ADAPTOR

For using a combination of square drive sockets in one application



SIZES
1/4" (F) to 3/8" (M)
3/8" (F) to 1/4" (M)
3/8" (F) to 1/2" (M)
1/2" (F) to 3/8" (M)
1/2" (F) to 3/4" (M)
3/4" (F) to 1/2" (M)
3/4" (F) to 1" (M)
1" (F) to 3/4" (M)

FLEXIBLE EXTENSION

Ideal for use in confined spaces



DRIVE SIZE
1/4"

HEX SPARK PLUG SOCKET

Designed for insertion & removal of spark plugs



HEX SIZE
16 mm
21 mm

L HANDLE

- Spring loaded ball bearing holds sockets securely
- Fixed L handle for applications requiring rigid set up



DRIVE SIZE	LENGTH
1/2"	5" (125 mm)

SPINNER HANDLE

Used for rapid installation of longer bolts



1/4" (F) square recess allows spinner to be used with a ratchet & also works as a long extension



DRIVE SIZE
1/4"

SOCKET RAILS

QUICK RELEASE SOCKET RAILS

NEW!


- Sturdy, lightweight aluminium construction
- Spring loaded quick lock mechanism locks the socket on the rails. Once locked, the sockets will not fall off in any condition
- Easy release: Press push button to release sockets

DRIVE SIZE	NO. OF CLIPS
3/8"	12, 14
1/4"	6, 12, 14
1/2"	12, 14, 16

SRL-ALM

Magnetic

Powerful neodymium (N52) rare earth magnets easily attached to any metallic surface

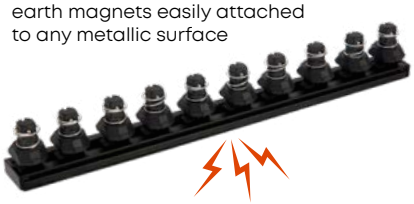

SRL-AL

Non-Magnetic




RATCHET HANDLES

PEAR HEAD RATCHET HANDLE

CV Chrome Vanadium | 24

RTD-PH

2 pc construction with detachable head for convenient storage

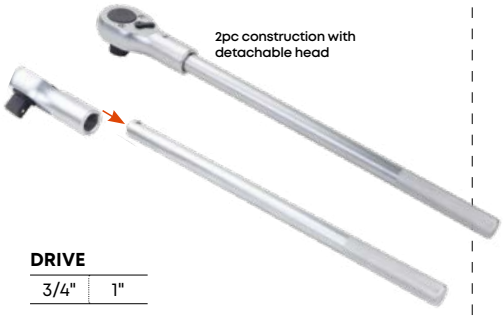

DRIVE

3/4"	1"

SLIM LINE RATCHET HANDLE

CV Chrome Vanadium | 60

RTD-SL

- 30% slimmer than regular ratchet handles - higher torque with less effort
- Quick release button with one thumb for replacing sockets quickly & efficiently
- Reversible lever switch



DRIVE SIZES

1/4"	3/8"	1/2"

PUSH THROUGH RATCHET HANDLE

CV Chrome Vanadium | 30

RTD-PT

Unique push through ratchet rotates in only one direction



DRIVE SIZE

1/2"

ROUND HEAD RATCHET HANDLE

CV Chrome Vanadium | 43

RTD-RH

- Classic round head ratchet mechanism
- Knurled handle for non slip grip
- Spring loaded ball attaches onto sockets, preventing them from being dropped



DRIVE SIZE


3/4"

DUAL DRIVE RATCHET HANDLE

CV Chrome Vanadium | 52

RTD-DD

- Dual Ratchet Mechanism
- Can be used as: Conventional Ratchet or Twist Action Ratchet

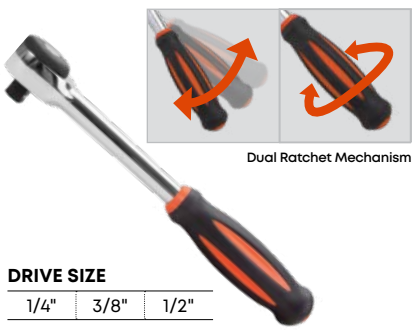

Dual Ratchet Mechanism

DRIVE SIZE

1/4"	3/8"	1/2"

SWIVELLING GEAR 360° RATCHET HANDLE

CrMo Chrome Molybdenum | 43

RTD-360

360° swivelling gear Ratchet Handle with adjustable square drive



DRIVE SIZE

1/4"	3/8"	1/2"

SOCKET SETS IN BLOW MOULD CASES

1/4" DRIVE

Hex Socket Set
KIT/SKT/H/1-4/19/UG

19 PC SET

- 13 pcs Sockets
  4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 1 pc Ratchet Handle
- 2 pcs Extension Bars
  50 & 100 mm (2" & 4")
- 1 pc Universal Joint
- 1 pc Sliding T Bar
- 1 pc Spinner Handle



Hex Socket Set
KIT/SKT/H/1-4/42/UG

42 PC SET

- 13 pcs Sockets
  4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 6 pcs Hex Bit Sockets
  3, 4, 5, 6, 7, 8 mm
- 3 pcs Slotted Bit Sockets
  4,5.5,7 mm
- 3 pcs Philips Bit Sockets
  PH1, PH2, PH3
- 3 pcs Pozi Bit Sockets
  PZ1, PZ2, PZ3
- 7 pcs Torx Bit Sockets
  T8, T10, T15, T20, T25, T30, T40
- 2 pcs Extension Bar
  50 & 100 mm (2" & 4")
- 1 pc Spinner Handle
- 1 pc Flexible Extension
- 1 pc Universal Joint
- 1 pc Sliding T Bar
- 1pc Ratchet Handle



1/2" DRIVE

Hex Socket Set
KIT/SKT/H/1-2/13/UG

Bi-Hex Socket Set
KIT/SKT/BH/1-2/13/UG

13 PC SET

- 11 pcs Sockets
  8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22 mm
- 1 pc Ratchet Handle
- 1 pc Extension Bar
  125 mm (5")



Hex Socket Set
KIT/SKT/H/1-2/27/UG

Bi-Hex Socket Set
KIT/SKT/BH/1-2/27/UG

27 PC SET

- 22 pcs Sockets:
  8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 26, 27, 28, 29, 30, 32 mm
- 2 pcs Extension Bar
  125 & 250 mm (5" & 10")
- 1 pc Universal Joint
- 1 pc Sliding T Bar
- 1 pc Ratchet Handle



SOCKET SETS IN METAL CASES

3/4" DRIVE

Hex Socket Set
KIT/SKT/H/3-4/14/MT

Bi-Hex Socket Set
KIT/SKT/BH/3-4/14/MT

14 PC SET

- 10 pcs Sockets
  22, 24, 27, 30, 32, 36, 38, 41, 46, 50mm
- 1 pc Round Head Ratchet Handle
- 2 pc Extension Bar
  100 mm (4") & 200 mm (8")
- 1 pc Sliding T Bar



1" DRIVE

Hex Socket Set
KIT/SKT/H/0-1/14/MT

Bi-Hex Socket Set
KIT/SKT/BH/0-1/14/MT

14 PC SET

- 10 pcs Sockets
  36, 41, 46, 50, 55, 60, 65, 70, 75, 80 mm
- 1 pc Ratchet Handle
- 2 pc Extension
  200 mm (8") & 400 mm (16")
- 1 pc Sliding T Bar



SOCKET SETS ON RAILS

1/4" DRIVE

Hex Socket Set
KIT/SKT/H/1-4/9LH/UG

- 8 pcs Sockets
  4, 4.5, 5, 5.5, 6, 7, 8 & 10 mm
- 1 pc Ratchet Handle



Hex Socket Set
KIT/SKT/H/1-4/13L/UG

- 13 pcs Sockets
  4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 & 14 mm



3/8" DRIVE

Hex Socket Set
KIT/SKT/H/3-8/8L/UG

Bi-Hex Socket Set
KIT/SKT/BH/3-8/8L/UG

- 8 pcs Sockets
  6, 8, 10, 12, 13, 14, 17 & 19 mm



Hex Socket Set
KIT/SKT/H/3-8/9LH/UG

Bi-Hex Socket Set
KIT/SKT/BH/3-8/9LH/UG

- 8 pcs Sockets
  6, 8, 10, 12, 13, 14, 17 & 19 mm
- 1 pc Ratchet Handle



1/2" DRIVE

Hex Socket Set
KIT/SKT/H/1-2/9L/UG

Bi-Hex Socket Set
KIT/SKT/BH/1-2/9L/UG

- 9 pcs Sockets
  8, 9, 10, 12, 13, 14, 17, 19 & 22 mm



Hex Socket Set
KIT/SKT/H/1-2/11LH/UG

Bi-Hex Socket Set
KIT/SKT/BH/1-2/11LH/UG

- 10 pcs Sockets
  8, 9, 10, 12, 13, 14, 17, 19, 22 & 24 mm
- 1 pc Ratchet Handle



Socket Set
KIT/BIT-SKT/SPL/1-2/6/UG

Spline Bit Sockets
55mm length: M6, M8, M10
100mm length: M8, M10, M12



Socket Set
KIT/BIT-SKT/TX/1-2/9/UG

- Torx Bit Socket
  T20, T25, T27, T30, T40, T45, T50, T55, T60



Hex Socket Set
KIT/BIT-SKT/H/1-2/8/UG

- 8 pcs Hex Bit Sockets
  5, 6, 7, 8, 10, 12, 14 & 17 mm



IMPACT SOCKETS

IMPACT SOCKETS - HEX

1/2" DRIVE

- **Hex Sockets**
  10 mm to 27 mm
- **Deep Hex Sockets**
  14 mm to 24mm



3/4" DRIVE

- **Hex Sockets**
  17 mm to 46 mm
- **Deep Hex Sockets**
  24 mm to 30 mm



1" DRIVE

- **Hex Sockets**
  19 mm to 65 mm
- **Deep Hex Sockets**
  27 mm to 33 mm



06 spanners & wrenches

SPANNERS

REVERSIBLE RATCHETING SPANNERS

Chrome Vanadium

CSP-RRT

- Chrome plated body with ultra premium scratch proof finish
- 72 Teeth ratchet with 5° action arc provides extreme high torque
- Reversible lever easily switches action direction
- Easy access & higher leverage with offset at ring end with 15° angle
- **Available in 7 sizes**
  8 mm to 19 mm



RATCHETING SPANNERS

EXTRA LONG

Chrome Vanadium

CSP-XRT

- Designed for high torque applications
- Exceeds **ANSI** & **DIN** standards
- 15% longer than traditional wrenches for better leverage
- 72 teeth with 5° action arc for smooth movement
- Narrow & thin head with wider turning angle gives user more space to operate
- **Available Variants**
  a. Metric sizes:
  8 mm to 19 mm
  b. Imperial sizes:
  5/16" to 3/4"



WRENCHES

SINGLE OPEN END WRENCH

Chrome Vanadium

SOEW

- Forged from CrV Steel with Manganese Phosphate finish
- Conforms to **DIN 894**
- 15° Offset for higher leverage & easy accessibility
- Ideal for heavy duty industrial applications
- **Available sizes**
  36-95 mm



SLOGGING WRENCHES

Chrome Vanadium

- Forged from CrV Steel
- **39-46 HRC** hardened & tempered
- Ideal for tightening & slackening large nuts & bolts
- One end is shaped to fit a nut & other end is enlarged to receive blows from hammer
- **Available 19 sizes**
  22 mm to 85 mm

RSW

Ring Slogging Wrenches



OSW

Open Jaw Slogging Wrenches



ADJUSTABLE WRENCHES

Chrome Vanadium

AWR

- **38-46 HRC** hardened CrV Steel construction
- Precision grounded jaws for secure grip
- Graduated scale
- Use same wrench on metric & imperial fasteners
- Ergonomic handle for fatigue free usage
- **Available in 4 sizes**
  6" (150 mm), 8" (200 mm), 10" (250 mm) & 12" (300 mm)





NOTE
Ensure that fixed jaw leads the rotation & movable jaws follows the fixed jaw. This way, there will be less stress on the movable jaw which is not supported as ruggedly as the fixed jaw

WHEEL WRENCHES
DOUBLE ENDED

WW-D

- Used for opening lug nuts on trucks, buses, farm & off road vehicles
- Forged from alloy steel with rust inhibiting Nickel plating
- **Available in 10 sizes**
  24 x 27 to 41 x 21 mm




Alloy Steel Wheel Wrenches With Tommy Bar

CROSS WHEEL WRENCHES
NEW!

CWW

- Forged construction
- Hardened 45 ±5 HRC
- Rust resistant chrome plated finish
- Four socket heads fit most common lug nut sizes
- Available in two lengths:
  14" (350 mm)
  20" (500 mm)

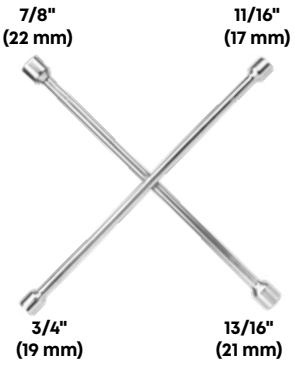



TELESCOPIC WHEEL WRENCH

WW-TP

- Designed to loosen out and remove even the most rusted and jammed wheel nuts
- Telescopic handle extends from 14" (350 mm) to 22" (550 mm) giving extra leverage
- Comes with two 1/2" square drive dual side sockets, 17×19 mm & 21×23 mm





1/2" Square drive in the center of the socket permits use of both hex sides



07 pliers & cutters

PLIERS

INSULATION PLIERS

35-50 HRC **1000V SAFE**

SCP-CV

Side Cutting Pliers
Suitable for cutting wires

Available lengths:
6" (150 mm)
7" (175 mm)



LNP-CV

Long Nose Pliers
Suitable for cutting & gripping wires

Available lengths:
6" (150 mm)
7" (175 mm)
8" (200 mm)



CPL-CV

Combination Pliers
Suitable for gripping, bending, straightening, crushing, pulling, stripping insulation, cutting wires etc.

Available lengths:
6" (150 mm)
7" (175 mm)
8" (200 mm)



CIRCLIP PLIERS

CLP-CV

Chrome Vanadium

40-45 HRC



External Straight | External Bent | Internal Straight | Internal Bent

AVAILABLE LENGTHS

6" (150 mm)
7" (175 mm)

REVOLVING PUNCH PLIERS

45-55 HRC

RPL

- Used to punch holes in leather, canvas, plastics, watch bands, belts etc.
- **Spring loaded revolving head with 6 punches**



5/64" (2 mm)
3/32" (2.5 mm)
1/8" (3 mm)
9/64" (3.5 mm)
5/32" (4 mm)
3/16" (4.5 mm)

WATER PUMP PLIERS

Chrome Vanadium

35-50 HRC

WPP-CV

- Box joint adjustment system
- for easy one hand operation





AVAILABLE LENGTHS

7" (175 mm)
10" (250 mm)
12" (300 mm)
16" (400 mm)

SELF LOCKING PLIERS

45-60 HRC

SLP-CM

- Forged from Chrome Molybdenum steel
- Curved jaw design



AVAILABLE LENGTHS

7" (175 mm)
10" (250 mm)

MIG WELDING PLIERS

35-50 HRC

MWP-CS

- Forged from C50 Steel
- **Length:** 8" (200 mm)
- Used for maintenance of welding guns in MIG welding



WHEEL BALANCING PLIER

WBP-CV

- Useful for Forming wheel balancing weights Removing & attaching wheel balancing weights from rims
- **Length**
  10"(250 mm)



SLIP JOINT PLIERS

SJP-CS

- Forged from C50 steel
- Pliers feature a pivot point slip joint that can be conveniently moved to increase/ decrease jaw range



AVAILABLE LENGTHS

6" (150 mm)
8" (200 mm)
10" (250 mm)

RATCHETING PIPE CUTTER

PCT

- Precise cuts with no burrs!
- 50% less effort with special shape & size of Blade
- Use on PVC, PP, PE, PER, ABS, PE-HD pipes
- Cuts upto 1-21/32" (42 mm) dia pipes



TUBING CUTTERS

NEW!

TCT-Q

Mini Close Quarter Tubing Cutter - Spring Loaded

- Zinc die cast slide and wheel housing
- Spring-loaded cutting mechanism - 30% reduced effort
- Large knurled feed screw knob gives easy control of cutting pressure for clean cuts







Pipe diameter: 1/8" to 5/8"

Pipe diameter: 1/8" to 1-1/8"

TCT-C

C-Style Close Quarter Tubing Cutter

- Compact design optimized for easy access to the tightest space Directional grip for convenient usage
- Pipe diameter: 1/2"



RETRA KNIFE PROFESSIONAL

SK2 BLADE

KNV-R7

- Zinc alloy body
- Each blade can be used twice
- Store upto 5 spare blades
- Quick change blade operation
- In-built storage compartment that can store spare blades (included) gives convenient access to new blades
- **Overall Length** 6-3/4" (170 mm)
- **Blade Thickness** 0.02" (0.6 mm)



SNAP OFF KNIFE

KNV-S

- Rugged Aluminium knife body
- **Hardened SK2**, 18mm steel blade with superior edge & auto locking slider for superior hold
- **Blade Thickness** 45/64" (18 mm)





RETRACTABLE UTILITY KNIFE

SK2 BLADE

KNV-5

- Lightweight, yet robust
- Aluminium Die Cast body
- **Overall Length** 6-3/4" (170 mm)
- **Blade Thickness** 0.02" (0.6 mm)



08 hacksaw frames and blades

HACKSAW FRAMES

SUPER CUT HI-TENSION HACKSAW

30,000 PSI

HF40

- **Amongst the world's strongest and fastest cutting hacksaw frame**
- Blade can be tensioned upto 5X more than most other hacksaws
- Aluminium die-cast handle with tubular frame
- Blade can be mounted at 45° or 90°
- Storage space in tubular frame for spare blades
- Comes with 12" (300mm) bi-metal blade




HANDYMAN'S HACKSAW

6,000 PSI

HF15

- Aluminium die-cast handle
- Tubular steel frame with storage for spare blades
- Blade can be mounted at 45° & 90°
- Comes with 12" (300mm) chrome steel blade

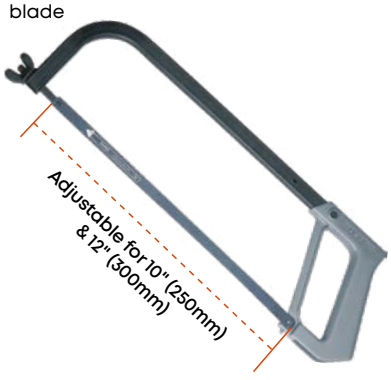

HACKSAW FRAMES
PROFESSIONAL

8,000 PSI

HF12

- Aluminium die-cast handle with tubular steel frame
- Comes with 12" (300mm) chrome steel blade

HF/12/BC

Chrome plated frame with blue handle



HF/12/RB

Black powder coated frame with red handle



JUNIOR SAW BABY BITE

JHF-P12

- Compact steel frame
- ABS handle grip
- Blade tensioning mechanism locks blade easily
- Comes with 6" (150mm) mini saw blade

JHF/P12-RD

Red handle



JHF/P/12/GY5/BL

Grey handle



JHF/P/12/BL/BL

Black handle



JUNIOR SAW FRAMES

JHF-4

- Steel wire frame junior saws designed to ensure correct alignment & perfect blade tension
- Complete with 6" (150mm) mini saw blade

JHF/4

Plated frame



JHF/4PD

Blue powder coated frame



JHF/4PD/GY

Grey powder coated frame



FRET SAW FRAMES

FSF

- Ideal for fine cutting work in wood & other fine materials
- Large bow allows blade to be tensioned as it is clamped in the frame
- Complete with standard fret saw blade


FSF/9

Powder coated frame



FSF/9/CP

Chrome plated frame



COPING SAW FRAMES

CSF

- Ideal for cutting intricate shapes in wood
- Blade can be turned to cut at any angle
- Required tension achieved by turning the handle
- Complete with a well set coping saw blade

CSF/10

Blue powder coated frame



CSF/10/CP

Chrome plated frame



PIERCING SAW FRAMES

PSF

For precision profile cutting of thin metal, plastic in metal working, jewellery & dentistry applications

PSF/A/11

- Adjustable Piercing Saw Frame
- Adjustable for different blade lengths & can even accommodate broken blades



PSF/8

- Deep Bow Piercing Saw Frame
- Deep bow design for application that require larger depth



HACKSAW BLADES

BI-METAL HACKSAW BLADES



66-68 HRC

HB-BC


- Super efficient, shatter proof bi-metal blades
- High speed steel cutting edge welded to a spring steel back
- Cobalt enhances blade hardness to 66-68 HRC making these suitable for use on nickel based alloy and high hardness steel



LENGTH	TPI
10" (250 mm)	14, 18, 24 & 32
12" (300 mm)	14, 18, 24 & 32



30% more cutting power



Wavy Teeth Pattern with 6 teeth chip removal cycle for cleaner cutting Prevents teeth from binding with material being cut

HACKSAW BLADES



52-62 HRC

HB-C

- High grade chrome alloy steel blades
- For light & medium sawing jobs



LENGTH	TPI
10" (250 mm)	18 & 24
12" (300 mm)	18 & 24

MINI SAW BLADES

MSB

Hardened blades useful for metal working applications



LENGTH	TPI
6" (150 mm)	32

COPING SAW BLADES

CSB

Heat treated steel blades with teeth set to ensure speed of cutting & ease of turning



LENGTH	TPI
6-1/2" (165 mm)	14

FRET SAW BLADES

FSB

Ideal for hand & light machine sawing of wood, bone, vulcate, fibre, horn & plastics



LENGTH	TPI
5" (125 mm)	10, 12, 14, 16 & 18


09 vices & clamps

VICES

MULTI PURPOSE VICE

BV-MP

- Ideal vice for mechanic's & professional users
- Jaw Width: 5" (125 mm)
- Jaw Opening: 5" (125 mm)

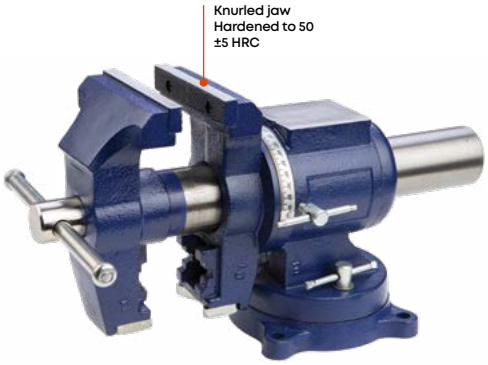



Pipe Jaw can hold pipes with diameter upto 2" (50 mm)



Integrated 360° swivel base




Rotating jaw head

ENGINEER'S STEEL BENCH VICES

EBV

- All steel construction
- Fixed base with integrated anvil for shaping & beating

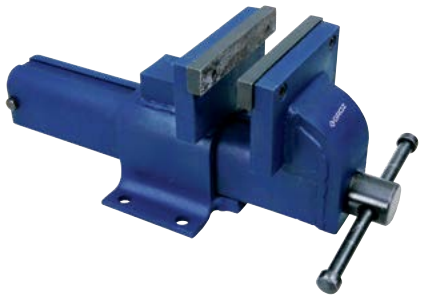

JAW WIDTH
4" (100 mm)
6" (150 mm)
8" (200 mm)

MECHANIC'S VICES BENCH VICES

20,000 PSI

Heavy Duty Mechanic's BV Series

- Cast iron construction with excellent shock bearing capacity & high strength under compression
- Designed for tough usage in industrial applications & training workshops

JAW WIDTH
3" (75 mm)
4" (100 mm)
5" (125 mm)
6" (150 mm)
8" (200 mm)

BV-F

Fixed Base



BV-S

360° Swivel Base



Mechanic's BNV Series

Lighter weight vices designed for gripping/ holding jobs & general purpose workshop applications

JAW WIDTH
4" (100 mm)
5" (125 mm)
6" (150 mm)
8" (200 mm)

BNV-F

Fixed Base



BNV-S

360° Swivel Base



DRILL PRESS VICES

UNIGRIP

DPV-UG

- Low profile & compact vices suitable for use in metal & woodworking applications
- Fixed jaw with 3 longitudinal and 1 transversal prisms for firm gripping of round stock both horizontally and vertically
- Spindle moves inside the hollow hand grip making these vices usable on any position on work table



JAW WIDTH
3-3/16" (80 mm)
4" (100 mm)
5" (120 mm)


3 WAY DRILL PRESS VICES

3 MOUNTING OPTIONS


UNIGRIP

DPV-3UG

- 3 mounting options useful for drilling along all axes with a single setting of job & holding of long workpieces which are cumbersome & difficult to manage in regular vices
- Jaw Opening: 3-1/2" (88 mm)
- Jaw Width: 4" (100 mm)

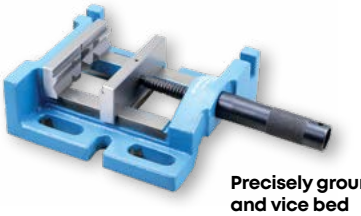

Precisely ground base and vice bed

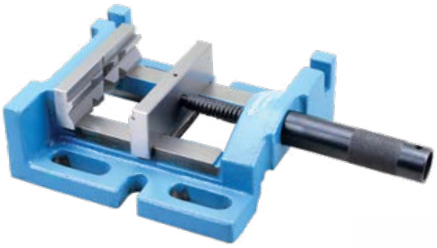



Fully ground end face allows for right angle machining with the same machine setting



Fully ground side face allows for right angle machining with the same jaw setting. The jaw width acts as jaw height facilitating longer workpieces to be held

HAND VICES

HV

- Hand vices are best suited for working on small jobs
- Vices can be gripped in one hand or held between the jaws of a larger vice for better access to the workpiece



OVERALL LENGTH	JAW WIDTH
3" (75 mm)	1-3/8" (35 mm)
4" (100 mm)	1-9/16" (40 mm)
5" (125 mm)	2" (50 mm)

HOBBYIST VICES

Ideal for use by model makers & DIY enthusiasts

TBV-F

Fixed Base



JAW WIDTH
1-1/4" (32 mm)
1-5/8" (40 mm)
2" (50 mm)
2-3/8" (60 mm)
3" (75 mm)

TBV-S

- **Swivel Base**
- **For applications that involve working in confined spaces**



JAW WIDTH
1-1/4" (32 mm)
1-5/8" (40 mm)
2" (50 mm)
2-3/8" (60 mm)
3" (75 mm)

TBV-C

- **With integrated clamp**
- **Integrated clamp allows vice to be clamped on any surface easily**



JAW WIDTH
1-1/4" (32 mm)
1-5/8" (40 mm)
2" (50 mm)
2-3/8" (60 mm)
3" (75 mm)
4" (100 mm)

TBV-RC

- **With swivel base & integrated clamp**
- **Integrated clamp allows vice to be clamped on any surface easily and swivel base allows to rotate vice in any direction**



JAW WIDTH
2" (50 mm)

CLAMPS

G CLAMPS
GENERAL PURPOSE

30,000 PSI

GCL-13D

- SG Iron construction with powder coated finish with spindle in black oxide finish
- Handle bends before the frame is overstressed

CAPACITY

2" (50 mm)
3" (75 mm)
4" (100 mm)
6" (150 mm)
8" (200 mm)
10" (250 mm)
12" (300 mm)



G CLAMPS
JUNIOR

GCL-FSJ

- Forged construction
- Powder coated frames & zinc plated steel screws

CAPACITY

1" (25 mm)
1-1/2" (38 mm)
2" (50 mm)
2-1/2" (63 mm)
3" (75 mm)



10 woodworking tools

WOODWORKING PLANES

BENCH PLANES

SP-3

- **Smoothing Planes:** Designed for final finishing work
- Length: 9-1/2" (240 mm)
- Cutter width: 1-3/4" (45 mm)

Smooth Base



Corrugated Base



SP-4

- **Smoothing Planes:** Designed for final finishing work
- Length: 10-1/4" (260 mm)
- Cutter width: 2" (50 mm)

Smooth Base



Corrugated Base



JP-5

- **Jack Planes:** Designed for heavy stock removal when preparing sawn timber prior to final finishing
- Length: 14" (355 mm)
- Cutter Width: 2" (50 mm)

Smooth Base



Corrugated Base



FP-6

- **Fore Plane:** Designed for flattening & smoothening wider panels such as table tops & work bench tops
- Length: 18" (458 mm)
- Cutter Width: 2-3/8" (60 mm)



JP-7

- **Jointer Plane:** Designed for truing up the edges of long boards prior to joining them together to create large boards
- Length: 22" (560 mm)
- Cutter Width: 2-3/8" (60 mm)






DUPLEX RABBET PLANE


DRFP-78

- Plane has 2 positions for the cutter
  1. Rear position for regular rabbet work
  2. Forward position for bull nose work
- Length: 8-1/2" (212 mm)
- Cutter Width: 1-1/2" (40 mm)





Cuts rabbets both with and across the grain



Makes rabbet cuts in wood for door frames, windows, furniture and cabinet car cases

WOODWORKING VICES


WOODWORKING VICES

PLAIN SCREW

WWV

- Close-grained grey cast iron construction
- Heavy duty full size workshop vices
- Steel main screw has buttress thread
- Useful for large sized jobs in carpentry workshops

JAW WIDTH
6" (150 mm)
7" (175 mm)
9" (225 mm)

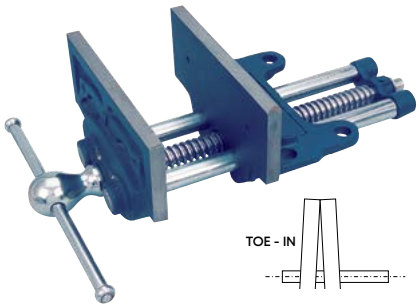


WOODWORKING VICE

PORTABLE

WWV-P

- Close-grained grey cast iron construction
- Dual clamping options:
  1. Permanent clamping on the workbench via clamping slots provided in the vices
  2. Additional clamping via 2.5/32" (55 mm) integrated clamp

JAW WIDTH
6" (150 mm)

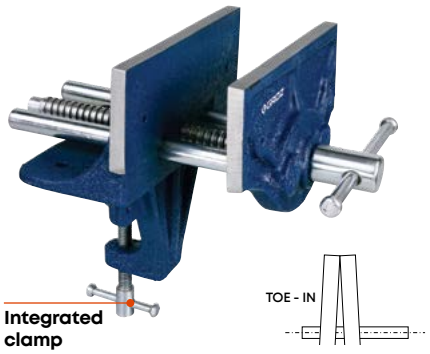




WOODWORKING VICE


QUICK RELEASE

WWV-DQ

- Close grained grey cast iron construction
- Steel main screw with buttress thread

JAW WIDTH
7" (175 mm)
9" (225 mm)
10-1/2" (270 mm)



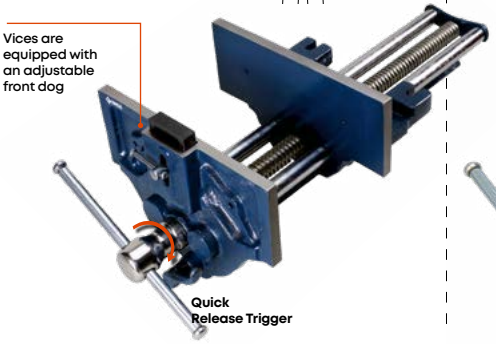


WOODWORKING VICE


RAPID ACTION

WWV-R

- Close-grained grey cast iron construction
- Rapid release of the work piece via counter clockwise rotation of the handle

JAW WIDTH
7" (175 mm)
9" (225 mm)



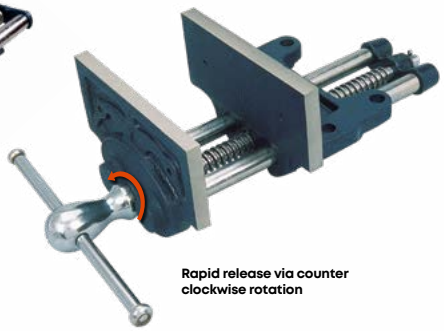

WOODWORKING

FRONT VICE

WWV-F

Used by wood workers to make their own vice assemblies & on work benches


JAW WIDTH
7-1/8" (181 mm)



QUICK WOODWORKING CLAMPS

KBC

- Manufactured from "K" section steel profiled to minimize flexing & bending
- Quick adjustment mechanism - lifting aluminium die-cast handle allows the sliding jaw to be moved anywhere on the rail
- Throat Depth (T): 3-11/32" (85 mm)
- Width Of Clamp Face (W): 1-7/16" (37 mm)
- Section: 1-1/8" x 3/8" x 1/4" (29 x 9 x 6 mm)

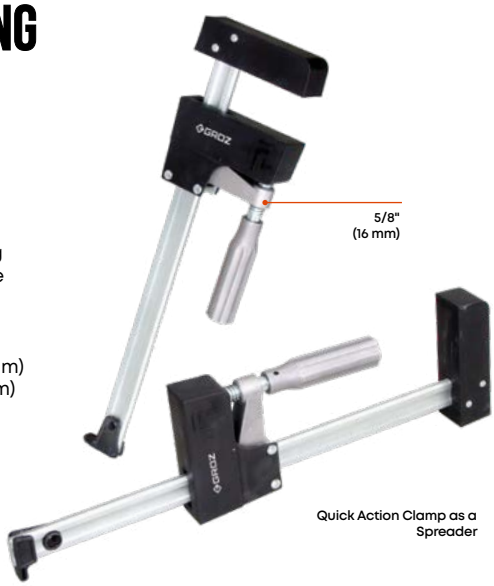

Quick Action Clamp as a Spreader




PCB/4/ST
Set of 4 Parallel Blocks. These are useful for efficient & accurate set up of raised panels, window & door frames, boxes etc.

CLAMPING CAPACITY
12" (300 mm)
24" (600 mm)
31" (775 mm)
40" (1000 mm)
50" (1250 mm)

CRAMP HEAD SET

CHST

- Low cost alternative to full size bar clamps
- Cast iron head & slide with tapered clamp face
- A bar clamp of any length can be made by using a piece of timber-1" (25 mm) thick

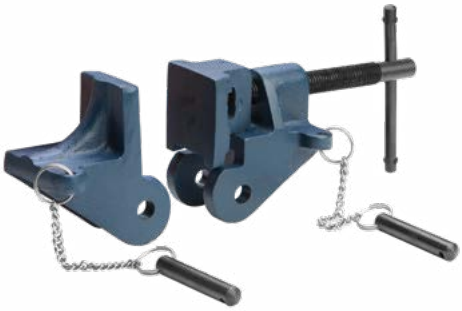


SASH BAR CLAMPS

SBC

- Useful for clamping large section workpeices during fabrication, carpentry, gluing in joinery etc.
- Malleable iron head and slides provide rigidity
- Head is fitted square to the bar with 1-1/2 - 2° taper for true clamping action
- Throat Depth: 2" (50 mm)
- Width Of Clamp Face: 1-3/16" (30 mm)


LENGTH	CAPACITY
24" (600 mm)	18" (450 mm)
30" (750 mm)	24" (600 mm)
36" (900 mm)	30" (750 mm)
42" (1050 mm)	36" (900 mm)
48" (1200 mm)	42" (1050 mm)
54" (1530 mm)	48" (1200 mm)

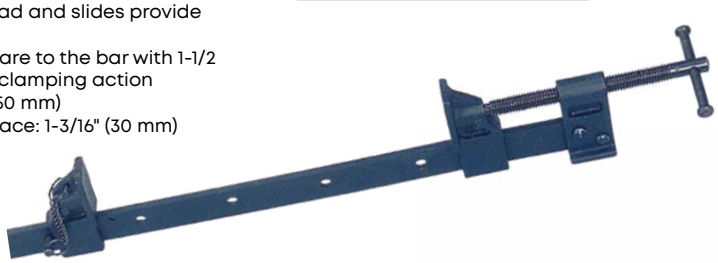

T BAR CLAMPS

TBC

- T-section bar (1" × 7/8") for high resistance to bending
- Perfect for application requiring extra resilience
- Malleable iron head and slide allow these clamps to be used in extra heavy duty applications
- Throat Depth: 1-7/8"(48 mm)
- Width of clamp face: 2-1/8"(54 mm)

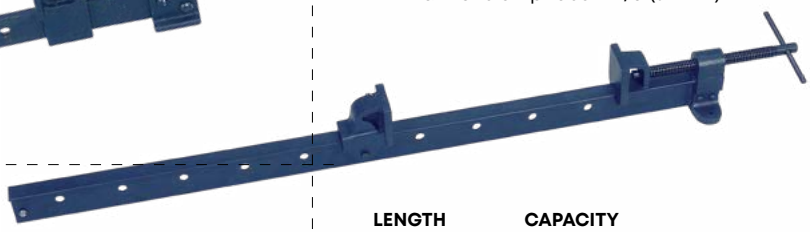


LENGTH	CAPACITY
36" (900 mm)	30" (750 mm)
48" (1200 mm)	42" (1050 mm)
60" (1500 mm)	54" (1350 mm)
72" (1800 mm)	66" (1650 mm)
84" (2100 mm)	78" (1980 mm)
96" (2400 mm)	90" (2250 mm)

DUO BAR CLAMPS

DBC

- Manufactured from drawn steel
- Dual clamping options: Internal & external clamping.
- Internal clamping is useful for holding window or door frames in position
- Equal holes on entire length for clamping a vast range of sizes
- Throat Depth: 2.1/8"(55 mm)
- Width of clamp face: 1.3/16"(30 mm)

LENGTH	CAPACITY
24" (600 mm)	18" (450 mm)
30" (750 mm)	24" (600 mm)
36" (900 mm)	30" (750 mm)
42" (1050 mm)	36" (900 mm)
48" (1200 mm)	42" (1050 mm)
54" (1350 mm)	48" (1200 mm)

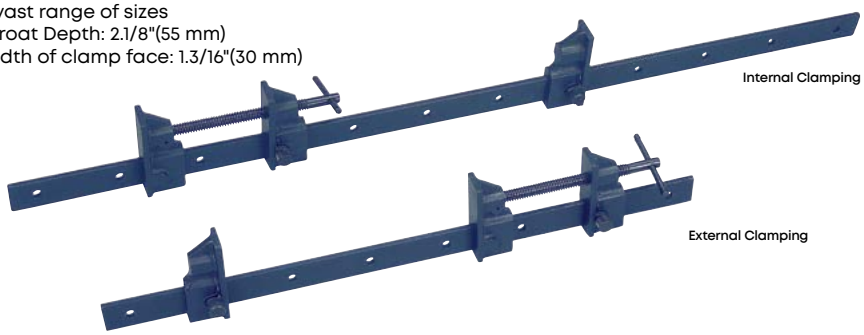
Internal Clamping

External Clamping



BAR CLAMPS NEW!

BCL

- Built for superior clamping force and durability, this clamp is ideal for demanding woodworking and metalworking applications
- 1-3/8" x 5/16" (35 mm x 8 mm) thick bar
- Heavy-duty cast iron jaws combined with steel bars
- Protective plastic caps on the jaws prevent scratches or damage to the workpiece

OVERALL LENGTH	CLAMPING CAPACITY
17" (425 mm)	12" (300 mm)
21" (525 mm)	16" (400 mm)
25" (625 mm)	20" (500 mm)
29" (725 mm)	24" (600 mm)
37" (935 mm)	32" (800 mm)
44" (1100 mm)	40" (1000 mm)
46" (1150 mm)	52" (1300 mm)
66" (1650 mm)	60" (1500 mm)
86" (2150 mm)	80" (2000 mm)



11 measuring & marking

MEASURING WHEEL

- **Adjustable height with 3 section telescopic handle**
  24" (600 mm) to 42-1/2" (1080 mm)
- **Wheel Dimensions**
  a. Diameter: 12"(300 mm)
  b. Circumference: 41" (1040 mm)
- Suitable in real estate, landscaping, municipal & construction work etc.



MWL-M

Measuring Range
Upto 9999.9 meter

MWL-F

Measuring Range
Upto 9999.9 feet

WING COMPASS

WC

- Heavy gauge steel sheet manufacturing
- Used for precisely scribing arcs and circles



AVAILABLE SIZES

6" (150 mm)
8" (200 mm)
16" (400 mm)

SPRING CALIPERS & DIVIDERS

Available in 10 sizes
3" (75 mm) to 24" (600 mm)

ID
Inside Calipers

OD
Outside Calipers

DD
Spring Calipers



CRAFTSMEN'S SPRING CALIPERS & DIVIDERS

- The finest calipers and dividers especially useful for the discerning craftsmen
- **Available in 6 sizes**
  3" (75 mm) to 12" (300 mm)

ID-SP
Inside Calipers

OD-SP
Outside Calipers

DD-SP
Spring Calipers



GRADUATED STEEL SQUARES

- General purpose steel squares with deep etched graduations
- Blade and stock are perfectly ground which ensures straightness and parallelism

SS-G

- With Imperial Graduations
- **Available Sizes**
  4"
  6"



SS-GM

- With Metric Graduations
- **Available Sizes**
  100mm
  150mm



PRECISION SQUARES

ACC BS939 GRADE B

SS-A

- Useful for woodworkers & cabinet makers
- **Available in 8 blade lengths**
  2" (50 mm) to
  12" (300 mm)



CENTRE SQUARE

CS

Extremely useful tool for locating centers of round stocks and parts, quickly and easily

AVAILABLE LENGTHS

1-1/2" (38 mm)
3" (75 mm)



STAINLESS STEEL POCKET RULES

SR-P

- SS rule with imperial dimensions in 1/16th, 1/32nd & 1/64th Metric dimensions in 0.5 mm & 1 mm
- **Length**
  6" (150 mm)



STAINLESS STEEL RULES


SR

Available in 2 types:

- Imperial & Metric combined
- Metric only

AVAILABLE LENGTHS

6" (150 mm)
12" (300 mm)
18" (450 mm)
24" (600 mm)
40" (1000 mm)
48" (1200 mm)



BRASS CALIPERS

BC-OR



Outside

- Used for making external measurements
- Measuring range 0-3" (0-75 mm)



Inside & Outside

- Inside measuring range 7/32"-4" (5 mm-100 mm)
- Outside measuring range 0-4" (0-100 mm)

SLIDE CALIPERS STAINLESS STEEL

SLC



Imperial

- Graduated in Inches in 16ths & 32nds
- Capacity: 4"



Metric & Imperial Combined

- Graduated in inches & mm. Inch graduations are in 16ths
- Capacity: 4" (100 mm)

12 taps, dies & holders

TAP & REAMER WRENCHES


ARWR-SG



- Designed to provide extra leverage to wrenches
- Useful when working with large diameters
- **Suitable for tap sizes**
  M1 - M6
  M1 - M12
  M4 - M16
  M4 - M20
  M6 - M30
  M9 - M45

TAP WRENCHES T HANDLE

TW



Regular T Handle Type

- Self-centering hardened steel jaws provide a positive grip on taps, reamers and other such small tools
- **Suitable for tap sizes**
  M2 - M5
  M2 - M6
  M4 - M6
  M5 - M8
  M6 - M10

TW-R



Ratchet Type

- Ratchet can be set left/ right or direct engagement in neutral position for ease of use in confined spaces
- **Suitable for tap sizes**
  M4 - M6
  M6 - M12

DIES STOCK HOLDERS FOR ROUND DIES

DS



- Designed to hold dies firmly in place
- All steel construction with powder coated knurled ends
- **Suitable for holding dies**
  13/16"
  1"
  1-5/16"
  1-1/2"
  2"
  2-1/2"

TAP & DIE SETS

KIT-TDE

41 PCS TAP & DIE SET
TDE/41/I/ST - imperial sizes
TDE/41/M/ST - metric sizes



37 PCS METRIC TAP & DIE SET
TDE/1/ST



ROUND DIES

DI

Carbon Steel Construction

Available in following variants:

1. BSW 55° Round dies
2. BSF 55° Round dies
3. UNC 60° Round dies
4. UNF 60° Round dies
5. Metric Round dies
6. 55° BSP Round dies



HEX DIES

DI

Carbon Steel Construction

Available in following variants

1. BSW 55° Hexagonal dies
2. BSF 55° Hexagonal dies
3. UNC 60° Hexagonal dies
4. UNF 60° Hexagonal dies
5. Metric Hexagonal dies
6. 55° BSP Hexagonal dies



HAND TAPS

TAP

Carbon Steel Construction

Available in following variants:

1. British Standard Whitworth (BSW) 55°
   Set of 3
2. British Standard fine (BSF) 55°
   Set of 3
3. Unified coarse (UNC) 60°
   Set of 3
4. Unified fine (UNF) 60°
   Set of 3
5. British standard parallel(BSP) 55°
   Set of 2
6. Metric
   Set of 3



13 speciality hand tools

LAZY TONG HAND RIVETER

RT-LT

- Ideal for continuous & repetitive usage in automotive, construction & agricultural application
- Includes 3 nose pieces & a spanner
- **Suitable for riveting aluminum, steel & stainless steel POP / blind rivets**
  1/8" (3.2mm), 5/32" (4mm) & 3/16" (4.8mm)



HEAVY DUTY HAND RIVETER

RT-HD


- 2 jaw riveter with built in mandrel collector
- 5 interchangeable nose pieces threaded onto the handle
- **Suitable for riveting**
- Aluminum and steel POP/ Blind Rivets
  1/8" (3.2 mm)
  5/32" (4.0 mm)
  3/16" (4.8 mm)
  15/64" (6.0 mm)
  1/4" (6.4 mm)
- Stainless Steel Rivets
  1/8" (3.2 mm)
  5/32" (4.0 mm)
  3/16" (4.8 mm)
  15/64" (6.0 mm)



PAINT MIXERS

PMX

- Ideal for mixing paint & a multitude of other low density materials
- Fits 3/8" (9.5 mm) drill size

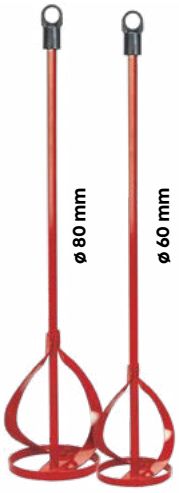

360° SWIVEL HAND RIVETER

RT-SW


- 360° swivel head riveter that can be used at any angle

Suitable for riveting

- Aluminum and steel POP/ Blind Rivets
  3/32" (2.4 mm)
  1/8" (3.2 mm)
  5/32" (4.0 mm)
  3/16" (4.8 mm)
- Stainless Steel Rivets
  1/8" (3.2 mm)
  5/32" (4.0 mm)



360° Swivel Head
Set rivets straight or at right angles

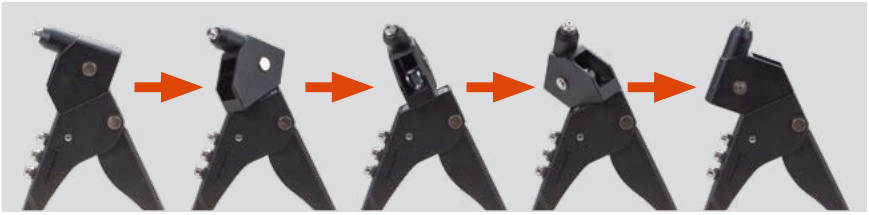


PAINT MIXERS NEW!

ZINC PLATED

PMX-ZN

- Used for mixing low to high viscosity materials
- Two piece construction:
  Blade & base - cold rolled steel sheets
- Rod - Mild steel

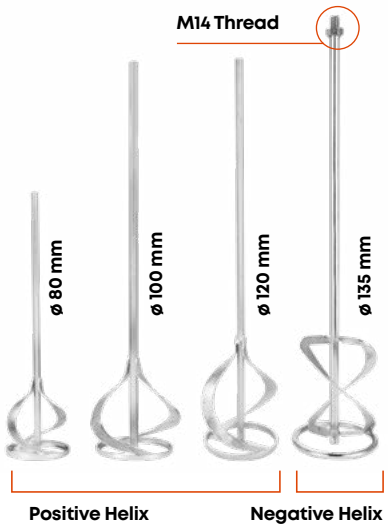

SCRATCH AWL

SA

- Used for making small holes in narrow timber
- The alloy steel blade runs through the handle & is securely fastened to plated steel ferrule & cap
- Hardwood handle is contoured for a comfortable grip
- **Overall Length:** 6-15/32"(165 mm)



GROMMET KITS

GRMT/1-4/ST24

- Includes 24 brass grommets (eyelets), hole punch, backer block, setting tool and anvil
- Size: 1/4" (6 mm)

GRMT/3-8/ST12

- Includes 12 brass grommets (eyelets), hole punch, backer block, setting tool and anvil
- Size: 3/8" (10 mm)

GRMT/1-2/ST12

- Includes 12 brass grommets (eyelets), hole punch, backer block, setting tool and anvil
- Size: 1/2" (12 mm)

GRM/B/1-4/ST24

- 24 Replacement grommets
- Size: 1/4" (6 mm)

GRM/B/3-8/ST12

- 12 Replacement grommets
- Size: 3/8" (10 mm)

GRM/B/1-2/ST12

- 12 Replacement grommets
- Size: 1/2" (12 mm)



industries

we serve

agriculture
automotive
construction
cement
DIY
electrical
industrial
marine
mining
oil & gas
plumbing
railway
woodworking
workshop

terms & conditions

Intellectual Property: The intellectual property of this catalogue is assigned to all countries of the world. Reproduction, full and/or partial adaptation of it's content (content, images, diagrams, icons, specifications, tables etc.) by any means without prior written permission from GROZ entails a violation of GROZ ENGINEERING TOOLS's copyrights and constitutes an act of unfair competition

Technical Data: All drawings, weights, units, dimensions, the descriptions & illustrations contained in the company's catalogues are only approximate and intended merely to give a general description of the goods described therein.

Specifications: The information contained in this catalogue is as accurate as possible and complies, as far as possible with existing regulations at the time of it's publication – FEBRUARY 2026. We therefore reserve the right to make modifications in line with modifications to regulations and/ or product specifications, drawings, illustrations for continual improvement. Buyers must ensure that goods are suitable for the purpose intended. Imperial dimensions shown as equivalents to metric and vice-versa are approximate.

Delay in Delivery: Delay in completion of work, delivery or in case of a contract for delivery by installments, delay in delivery of an installment shall not give rise to any liability upon the company whether or not any time of date is given in this respect and shall not entitle the customer to terminate the contract.

Liability: All goods are guaranteed to do the work for which they are designed. If the goods or any part thereof are defective solely as a result of faulty materials or workmanship of the company, the company's liability shall be limited, at it's discretion either to replacing such goods or the defective parts. But no such liability shall arise unless notification of any defect is received by the company in writing within 90 days from the receipt of goods by the buyer and the allegedly defective goods are thereafter returned to the company carriage paid with appropriate pre–notification.

Indemnity: The customer shall indemnify the company against all claims in respect of any loss, injury or damage sustained by a third party arising from the sales of the goods to the buyer how so ever caused and also against all actions, proceedings, costs, claims, demands and expenses made, brought or claimed against the company in respect of the infringement of any patent, trademark or registered design.

Groz Engineering Tools Pvt. Ltd.
Groz Net Industries

Village Kherki Daula, National Highway-8
Gurugram -122004, Haryana, INDIA
TEL +91.124.282.7700
E-MAIL info@groz-tools.com
URL www.groz-tools.com

CONNECT WITH US!

The GROZ name, GROZ logo and the mark are trademarks of Groz Engineering Tools Pvt. Ltd., India