

CAT 400

GROZ



total quality & control
5,00,000 sq. ft. plant
2,000 dedicated people

















multi spindle automats
high volume production of precision turned parts



cnc
advanced cnc turning & vertical machine centers





pressure die casting
plc controlled semi-automatic equipment







powder coating
robotically armed & conveyorised

Groz has always exceeded the expectations of tool manufacturers and users world over. Groz carefully makes each tool under stringent quality control processes that are achieved in a hi-tech manufacturing environment

GROZ

CONTENTS

ELECTRIC FUEL PUMPS

HEAVY DUTY ELECTRIC FUEL PUMPS 4

HEAVY DUTY HIGH FLOW ELECTRIC FUEL PUMP 6

ELECTRIC FUEL & OIL PUMPS 7

ELECTRIC DIESEL PUMPS 8

MANUAL FUEL PUMPS

INDUSTRIAL ROTARY FUEL PUMPS 10

ROTARY BOOSTER PUMP - 3:1 12

ROTARY BARREL PUMP - PROFESSIONAL 13

ROTARY BARREL PUMPS 14

ROTARY CHEMICAL PUMP 15

LEVER ACTION BARREL PUMPS 16

LEVER ACTION BIO DIESEL & E85 FUEL PUMP 17

PLASTIC LEVER PUMP 18

NYLON CHEMICAL PUMPS 19

DOUBLE DIAPHRAGM FUEL TRANSFER PUMP 20

QUART / LITRE STROKE PUMP 21

FUEL METERS

F METER - HIGH ACCURACY MECHANICAL FUEL METER 22

MECHANICAL DIESEL METER 24

DIGITAL FUEL METER 25

FUEL NOZZLES

FUEL CONTROL NOZZLES - MANUAL 26

FUEL CONTROL NOZZLES - AUTOMATIC 27

FUEL CONTROL NOZZLES - METERED 28

FUEL FILTERS

FUEL FILTER - SPIN ON CARTRIDGE STYLE 29

FUEL FILTER 30

FILTER WRENCH 31

HEAVY DUTY ELECTRIC FUEL PUMPS


Product Features

- Heavy Duty Industrial Grade Fuel pumps designed for Every Day use in Agricultural, Construction, Automotive & Industrial applications
- Rain & Weather proof for tough outdoor use
- Lightweight, yet strong non corroding Aluminum Die cast construction
- Geared pump design using precision sintered metal gears
- Geared construction makes the pump tolerant to contaminants in fuel; in addition to offering tremendous suction & minimal noise
- cUL, ATEX & IECEx listed Motor
- Duty Cycle: 30 Minutes On / 30 Minutes Off

WETTED COMPONENTS
Aluminum, Steel, Cast Iron, Nylon, NBR, Zinc, Viton, Polypropylene, PVC

RECOMMENDED USE
Gasoline, Diesel, E15 Fuel, Kerosene, Bio Diesel (B20)

Pump Internals

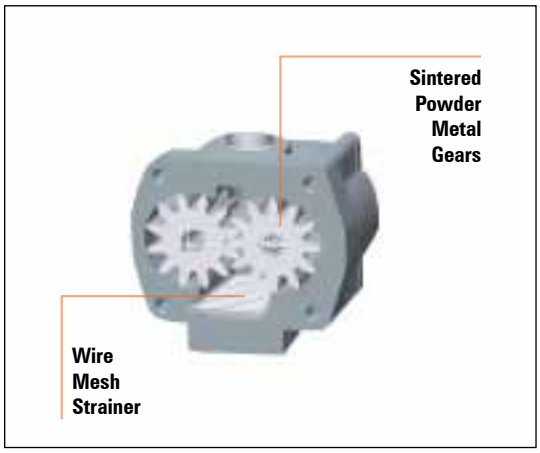


Drum Mounting



Specifications

	FPM-12	FPM-24	FPM-115	FPM-220
Description	Heavy Duty 12V DC	Heavy Duty 24V DC	Heavy Duty 115V AC	Heavy Duty 220V AC
Flow Rate (at pump outlet)	Upto 15 GPM (57 LPM)*	Upto 15 GPM (57 LPM)*	Upto 15 GPM (57 LPM)	Upto 15 GPM (57 LPM)
Explosion Proof Motor	1/4 HP 12V DC	1/4 HP 24V DC	1/4 HP 115V AC , 60 Hz.	1/4 HP 230V AC , 50/60 Hz.
Amp	12 Amp	6 Amp	1.7 Amp	1 Amp
Internal bypass valve	Yes	Yes	Yes	Yes
Suction Pipe	Steel	Steel	Steel	Steel
Hose	3/4" x 12' Anti Static Hose	3/4" x 12' Anti Static Hose	3/4" x 12' Anti Static Hose	3/4" x 12' Anti Static Hose
Tank Adapter	2" Threaded	2" Threaded	2" Threaded	2" Threaded
Inlet	1" NPT	1" NPT	1" NPT	1" NPT
Outlet	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Dispensing Nozzle	3/4" Manual with Swivel	3/4" Manual with Swivel	3/4" Manual with Swivel	3/4" Manual with Swivel
Battery Cable (2 Wire)	15'	15'	NA	NA

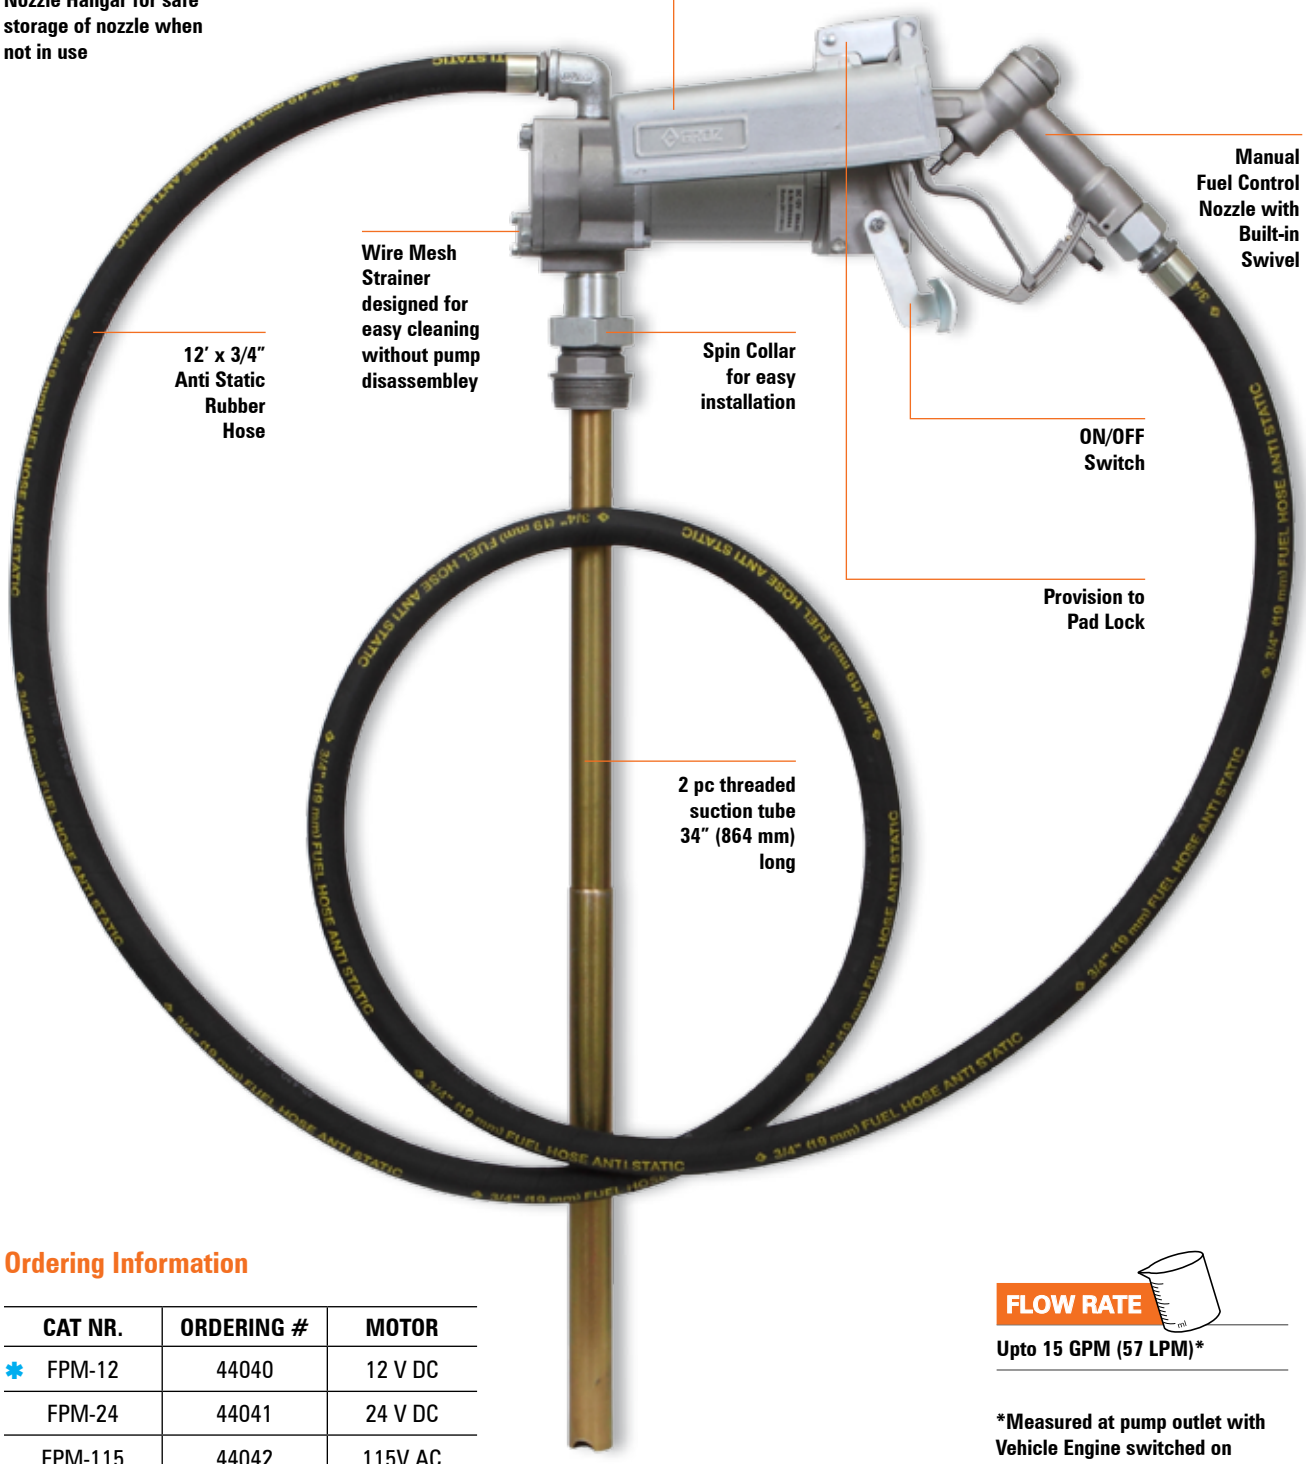

Ordering Information

CAT NR.	ORDERING #	MOTOR
✱ FPM-12	44040	12 V DC
FPM-24	44041	24 V DC
FPM-115	44042	115V AC
FPM-220	44043	220V AC

✱ Best Seller

FLOW RATE

Upto 15 GPM (57 LPM)*

*Measured at pump outlet with Vehicle Engine switched on

HEAVY DUTY HIGH FLOW ELECTRIC FUEL PUMP


FPM-HF

Product Features

- Heavy Duty Industrial Grade High Flow Fuel pump designed for heavy duty usage in Agricultural, Construction, Automotive & Industrial applications
- Rain & Weather proof for tough outdoor use
- Lightweight yet strong, non corroding Aluminum Die cast construction
- Geared pump design using precision sintered metal gears
- Geared construction makes the pump tolerant to contaminants in fuel; in addition to offering tremendous suction & minimal noise
- cUL, ATEX & IECEx listed Motor
- Duty Cycle: 30 Minutes On / 30 Minutes Off

WETTED COMPONENTS
Aluminum, Steel, Cast Iron, Nylon, NBR, Zinc, Viton, Polypropylene, PVC

RECOMMENDED USE
Gasoline, Diesel, E15 Fuel, Kerosene, Bio Diesel (B20)

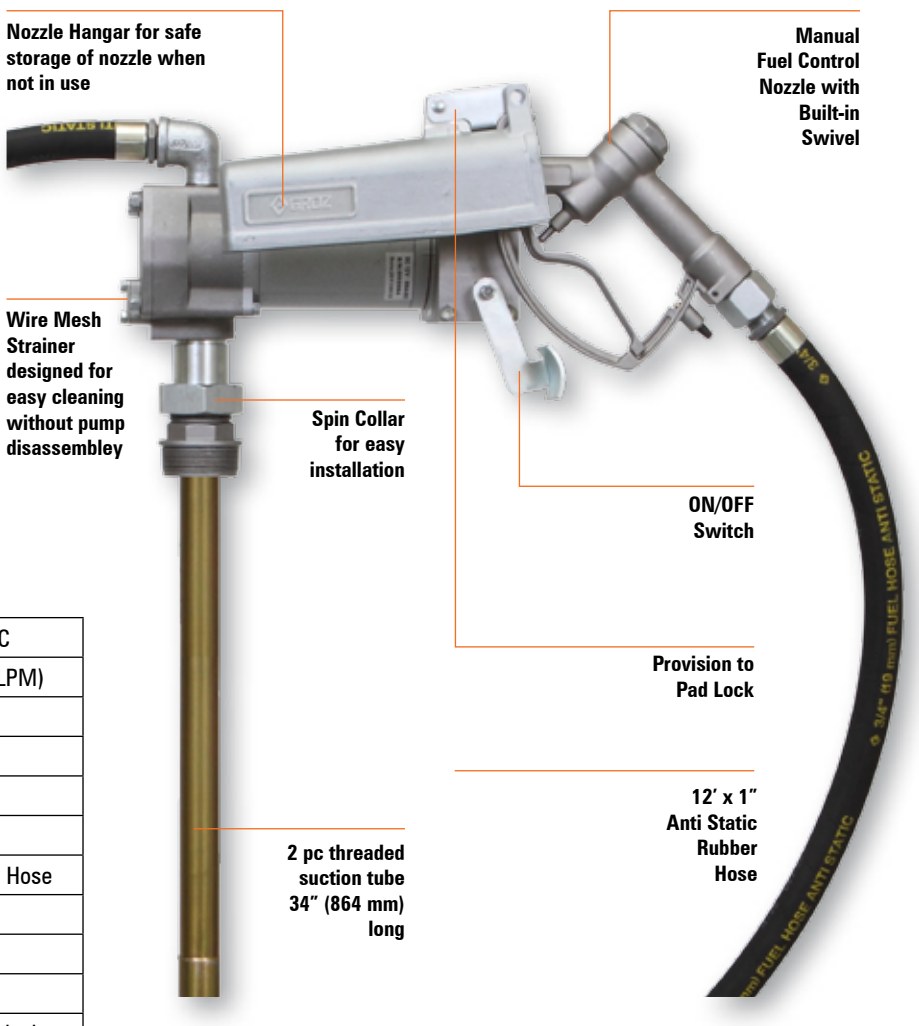

Specifications

Description	Heavy Duty 12V DC
Flow Rate*	Upto 20 GPM (75 LPM)
Explosion Proof Motor	1/4 HP 12V DC
Amp draw from Battery	15 Amp
Internal bypass valve	Yes
Suction Pipe	Steel
Hose	1" x 12' Anti Static Hose
Tank Adapter	2" Threaded
Inlet	1" NPT
Outlet	1" NPT
Dispensing Nozzle	1" Manual with Swivel
Battery Cable (2 Wire)	15'

Ordering Information

CAT NR.	ORDERING #
FPM/12/HF	44045

FLOW RATE

Upto 20 GPM (75 LPM)*

***measured at pump outlet with Vehicle Engine Switched On**

ELECTRIC FUEL & OIL PUMPS

EOP

Product Features

- Vertical mount Fuel & Oil pump designed for Indoor use in Industrial, Automotive, Heating & Marine applications
- For use with non flammable media
- Pumps have built in Bung Adapter to fit directly onto drums with a 2" threaded opening
- Manufactured from chemically inert materials; these pumps work with a wide variety of low viscosity media. Pump motor has double insulation which makes them safe for use with water & emulsions
- Built-In Anti Siphoning system ensures that media does not flow out by Siphon action incase of accidental damage to the delivery hose or dispensing nozzle
- Duty Cycle: Continuous Duty

WETTED COMPONENTS
POM, Polypropylene, Stainless Steel, Nitrile Rubber, Viton & PTFE

RECOMMENDED USE
Diesel, Kerosene, Mineral & Synthetic Oils, Heating Oils, Antifreeze, Water, Emulsions etc.



Specifications

Flow Rate*	Upto 10.5 GPM (40 LPM)
Motor	0.43 HP Centrifugal AC Motor
Max. Viscosity of Media	114 cSt
Internal bypass valve	No
Suction Hose	3/4" ID x 1 m long complete with Stainless Steel Strainer
Discharge Hose	3/4" ID x 3m long
Tank Adapter	2" Threaded
Inlet	3/4" Hose Barb
Outlet	3/4" Hose Barb
Dispensing Nozzle	Manual Polypropylene Nozzle with ¾" Hose Barb
Power Cord	2 m long

FLOW RATE

Upto 10.5 GPM (40 LPM)*

*** measured at pump outlet tested using Diesel at 20°C**

TEMPERATURE

Working Temperature Range -10°C to +40°C (14°F to 104°F)

! WARNING

DO NOT USE
With fluids with a flash point below 100°F (38°C), such as Gasoline & Alcohol

Sparking could result in explosion causing fatal injury

Drum Mounting



Ordering Information

CAT NR.	ORDERING #	DESCRIPTION
EOP/AC/230	45520	230V AC
EOP/AC/110	45522	110V AC

ELECTRIC DIESEL PUMPS

NEW!

Product Features

- Portable Diesel transfer pumps designed for everyday use in Agricultural, Construction, Automotive & Industrial applications
- Lightweight, yet strong non corroding Aluminum Die Cast Construction
- Self priming Vane pump design
- Duty Cycle: 30 Minutes On / 30 Minutes Off
- Available in a choice of 12V or 24V

WETTED COMPONENTS
Steel, Aluminum, Zinc, Cast Iron*, Nylon, Nitrile Rubber & PVC Nitrile
*Only for Drum Mount version

RECOMMENDED USE
Diesel & Kerosene



Upto 12 GPM (46 LPM)

WARNING

DO NOT USE
Fluids with a flash point below 100°F (38°C), such as Gasoline & Alcohol

Sparking could result in explosion causing fatal injury

Specifications

	12V DC	24V DC
Flow Rate (at pump outlet)	Upto 12 GPM (46 LPM)	Upto 12 GPM (46 LPM)
Motor	1/4 HP 12V DC	1/4 HP 24V DC
RPM	2600	2600
Amp draw from Battery	12 Amp	8.7 Amp
Internal bypass valve	Yes	Yes
Outlet	3/4" NPT	3/4" NPT
Battery Cable	2 metre	2 metre
Duty Cycle	30 mins. On / 30 mins Off	30 mins. On / 30 mins Off

Variants

BASE PLATE STYLE

Includes pump with base plate & lift handle. Pump inlet & outlet threaded ¾" (F). Supplied complete with 4m x ¾" ID hose that can be cut into two parts for use as a suction & delivery hose. Includes strainer & 2m long battery cable with fuse & clamps. Aluminum nozzle for controlling fuel delivery. Hardware supplied includes 3 hose barbs (3/4") & 4 hose clamps



EDP/12M/ST

DRUM MOUNT STYLE

Includes pump with 2" bung, elbow fitting, 2 pc threaded steel suction tube & nozzle holder. Pump Inlet threaded 1"(F) & outlet threaded ¾" (F). Supplied complete with 3m x ¾" ID delivery hose. Includes 2m long battery cable with fuse & clamps. Aluminum nozzle for controlling fuel delivery. Hardware supplied includes 2 hose barbs (3/4") & 2 hose clamps

EDP/12MD/ST





Ordering Information

CAT NR.	ORD. NR.	CAT NR.	ORD. NR.	Description	Base Plate	Lift Handle	Drum Bung	Nozzle Type	Nozzle Holder	Discharge Hose	Suction Tube	Nylon Suction Strainer
12V DC PUMPS		24V DC PUMPS										
EDP/12	45530	EDP/24	45535	Pump Only (Base Mount)	Yes	Yes	No	No	No	No	No	No
* EDP/12M/ST	45531	EDP/24M/ST	45536	Pump Kit (Base Mount) with Manual Nozzle	Yes	Yes	No	Manual	No	Combo Hose 4m long		Yes
EDP/12A/ST	45532	EDP/24A/ST	45537	Pump Kit (Base Mount) with Automatic Nozzle	Yes	Yes	No	Automatic	No	Combo Hose 4m long		Yes
EDP/12MD/ST	45533	EDP/24MD/ST	45538	Pump Kit (Drum Mount) with Manual Nozzle	No	No	Yes	Manual	Yes	Hose 3 m long	2 pc Steel	No
EDP/12AD/ST	45534	EDP/24AD/ST	45539	Pump Kit (Drum Mount) with Automatic Nozzle	No	No	Yes	Automatic	Yes	Hose 3 m long	2 pc Steel	No
BASE TO DRUM MOUNT CONVERSION KIT												
DMK/EDP	45540			Accessories kit to convert Base to Drum Mount version			Yes		Yes		2 pc Steel	

* **Best Seller**

INDUSTRIAL ROTARY FUEL PUMPS


Product Features


- Industry Standard for Rotary pumps, these are by far the heaviest duty, for severe outdoor use in extreme weather conditions
- Deliver media with a head / lift upto 20'
- Solid cast iron construction, fully CNC machined to close tolerances
- Pump Handle rotates a high quality sintered powder metal 3 Vane Rotor inside a highly finished pumping chamber
- Graphite Vanes are self lubricating & non wearing
- High Quality graphite Seal allows the pump to be used with a wide variety of fluids including Diesel with upto 15% Ethanol blend
- Self Priming operation with discharge up to 38 LPM (10 GPM)
- Supplied complete with 2" Bung, Telescopic Suction Tube with Strainer for use with 15 gallons (50 litre) – 55 gallons (205 litre) barrels
- Also available - Pump with Mechanical Fuel Meter in both litre and gallon versions

WETTED COMPONENTS
Cast Iron, Steel, Graphite, Paper, Polypropylene

DO NOT USE
With Water Based Media

PUMP CHAMBER WITH 3 VANE CONSTRUCTION

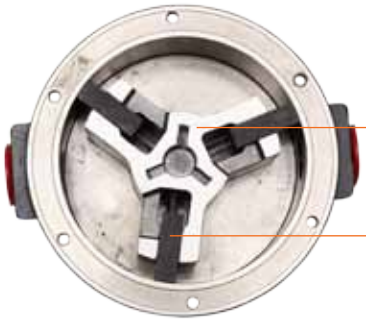

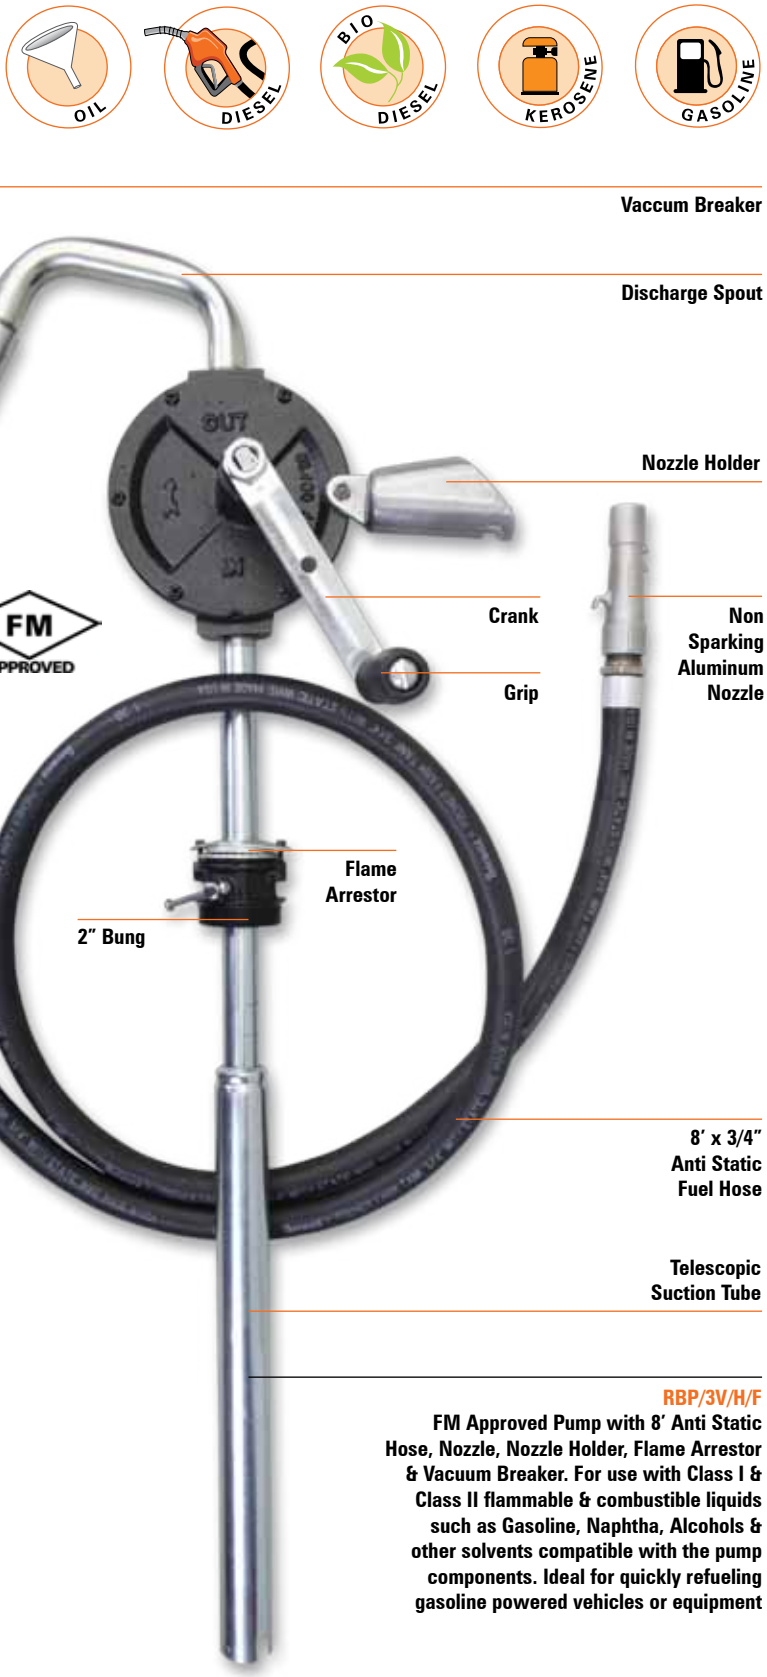


RBP/3V/H/F
FM Approved Pump with 8' Anti Static Hose, Nozzle, Nozzle Holder, Flame Arrestor & Vacuum Breaker. For use with Class I & Class II flammable & combustible liquids such as Gasoline, Naphtha, Alcohols & other solvents compatible with the pump components. Ideal for quickly refueling gasoline powered vehicles or equipment

Variants



RBP/3V
Pump with Steel Discharge Spout for use with Petroleum based fluids, Diesel & Kerosene. Ideal for use with Barrels, drums & tanks for transferring media into smaller containers

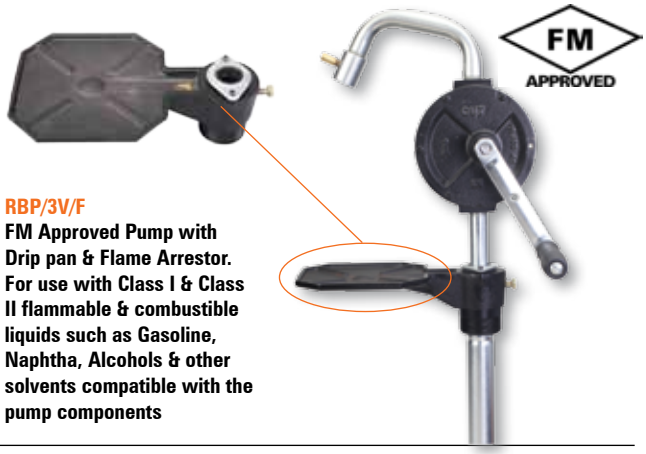

RBP/3V/F
FM Approved Pump with Drip pan & Flame Arrestor. For use with Class I & Class II flammable & combustible liquids such as Gasoline, Naphtha, Alcohols & other solvents compatible with the pump components



RBP/3V/H
Pump with 8' Antistatic Hose, Nozzle & Nozzle Holder for use with Petroleum base fluids, Diesel & Kerosene. Ideal for use with Barrels, Drums & tanks for quickly refueling Diesel powered vehicles or equipment



RBP/3V/H/MTG
Metered pump wth 8' Antistatic Hose, Nozzle & Nozzle Holder for use with Petroleum based fluids, Diesel & Kerosene. Ideal for use with Barrels, Drums & Tanks for refueling Diesel powered vehicles or equipment

Ordering Information

	CAT. NR.	ORDERING NR.	DESCRIPTION
✱	RBP/3V	44080	Steel Spout
✱	RBP/3V/H	44081	8' Anti-Static Hose, Non-Sparking Aluminum Nozzle & Nozzle Holder
◆	RBP/3V/H/MT	44085	8' Anti-Static Hose, Non-Sparking Aluminum Nozzle, Nozzle Holder & Mechanical Fuel Meter (Litres)
◆	RBP/3V/H/MTG	44087	8' Anti-Static Hose, Non-Sparking Aluminum Nozzle, Nozzle Holder & Mechanical Fuel Meter (Gallons)
	FM Approved Pumps		
	RBP/3V/H/F	44082	8' Anti-Static Hose, Non-Sparking Aluminum Nozzle & Nozzle Holder, Vaccum Breaker & Flame Arrestor
	RBP/3V/F	44084	Steel Discharge Spout, Drip Pan with Flame Arrestor
	DP/RBP/3V	44083	Replacement Drip Pan only
	Service Parts		
	KIT/RBP/3V	44086	Repair Kit
	SA/HOS/RBP/3V	44338	8' x 3/4" Replacement Hose

KIT/RBP/3V
Includes pump head gasket, graphite vanes (3), vane springs (3), shaft nut, packing & packing nut



Key
✱ **Best Seller**
◆ **New**

DELIVERS
38 LPM (10 GPM)

ROTARY BOOSTER PUMP - 3:1 RB-3

Product Features


- Geared Rotary barrel pump with 3 times discharge per rotation. For every complete handle turn, the rotor turns 3 times
- Ideal for use where volume fuel dispensing is needed, such as construction sites, workshop, aviation, farms / ranches, boat etc.
- Die Cast Aluminum construction with sintered gear driven die cast zinc rotor & vanes
- Discharge through 1.8 m of delivery hose with metal nozzle
- Complete with a 3 pc threaded suction tube for use on 15 gallons (50 litre) – 55 gallons (205 litre) barrels

WETTED COMPONENTS
Aluminum, Zinc, Steel, NBR & PVC Nitrile

RECOMMENDED USE
Gasoline, Diesel Fuel & Kerosene

DO NOT USE
With Corrosive liquids, solvents, acids, alkalis etc.



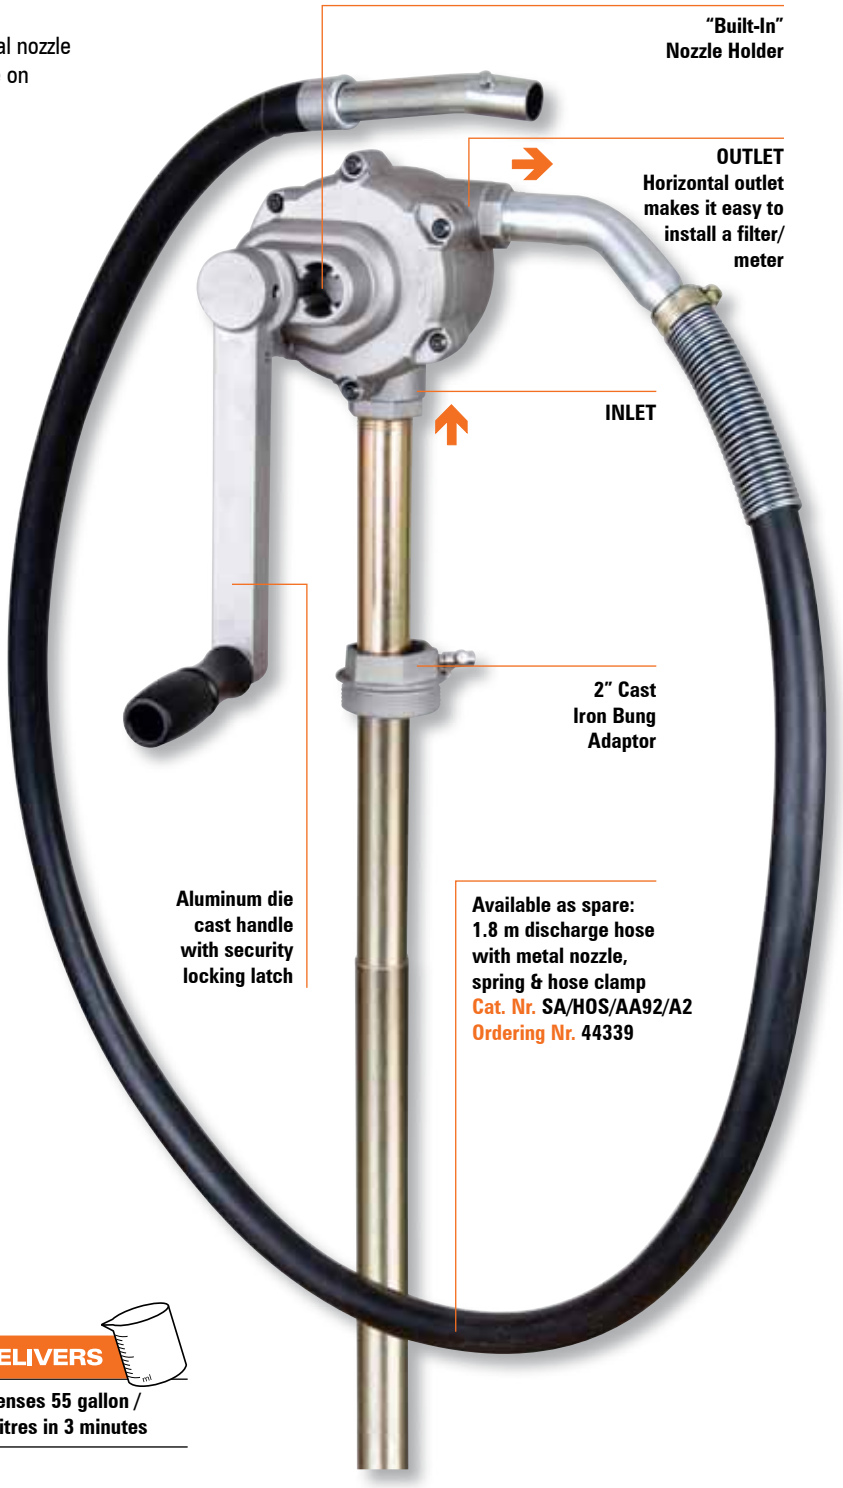


WARNING

Note that fuels containing Ethanol will cause more frequent replacement of rubber parts

Never operate the pump near fire or source of spark. Some media may be explosive & dangerous to pump

Pump Internals

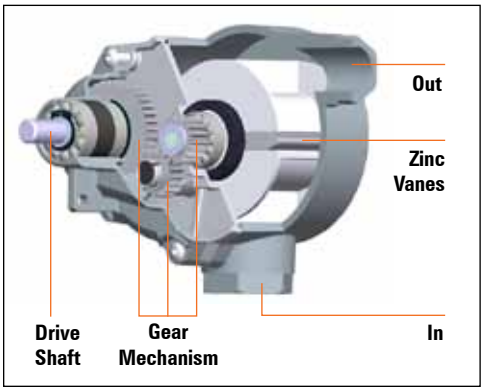

Ordering Information

CAT. NR.	ORDERING NR.
RB/3H	44198

DELIVERS
Dispenses 55 gallon / 205 litres in 3 minutes

ROTARY BARREL PUMP - PROFESSIONAL

RB-1

Product Features


- Rotary barrel pump with Aluminum Die Cast pump body, heavy duty zinc die cast rotor & vanes
- Ideal for use in Industrial & Automotive applications
- Includes a 2" Cast Iron bung adaptor & die cast aluminum handle with security locking latch
- Complete with a 3 pc threaded suction tube for use on 15 gallons (50 litre) – 55 gallons (205 litre) barrels

WETTED COMPONENTS
Aluminum, Zinc, Steel, NBR/Viton & PVC nitrile*
*only for RB/1H

RECOMMENDED USE
Gasoline, Diesel fuel, Kerosene, Antifreeze* & Lubricating oils upto SAE 60
*Only pumps with Viton Seal

DO NOT USE
With Corrosive liquids, Solvents, Acids, Alkalis etc.



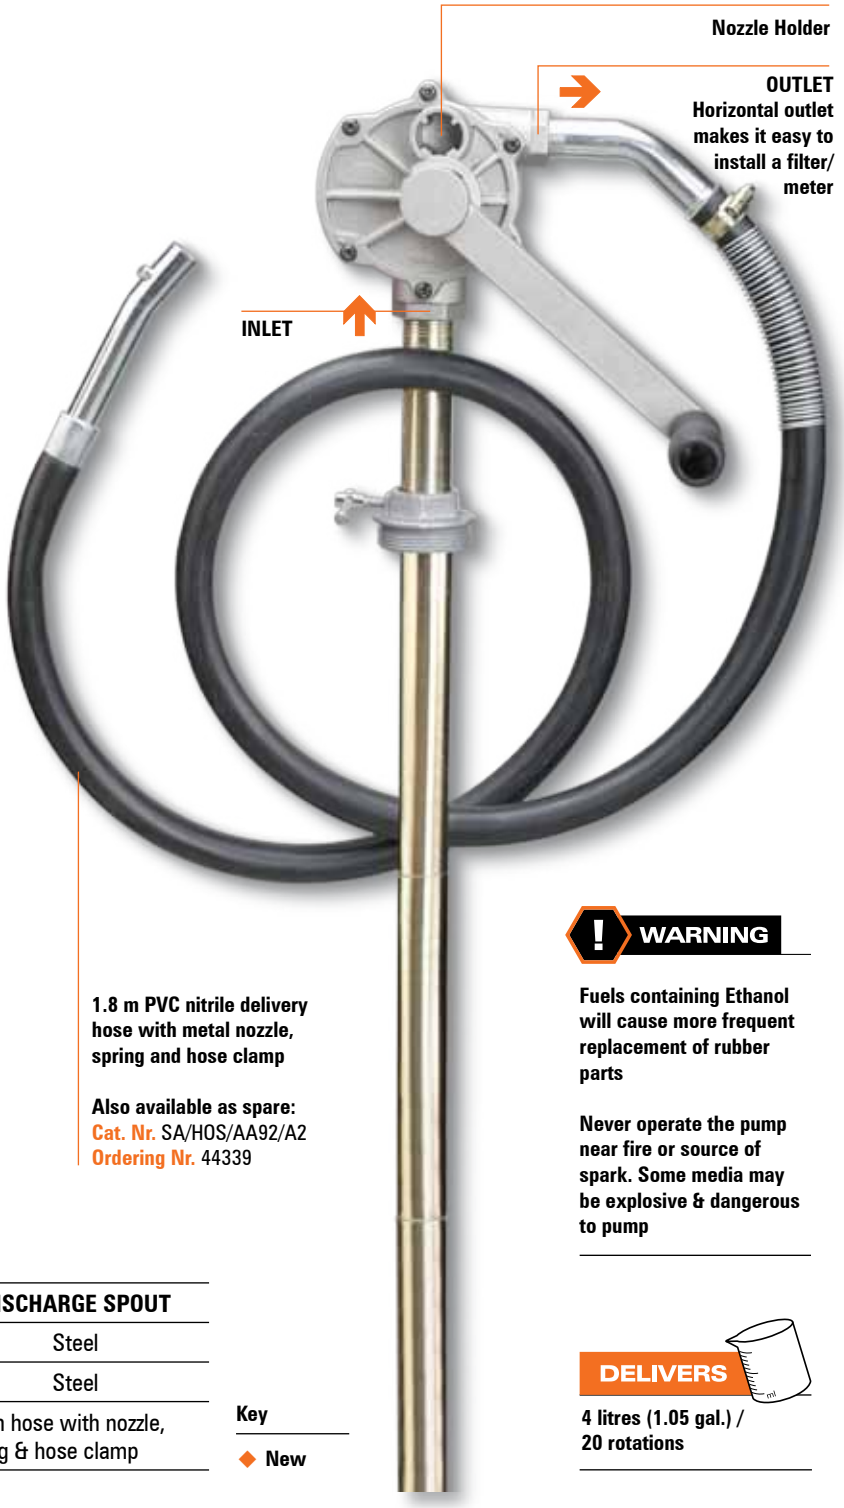

Also available as spare:
Cat. Nr. SA/HOS/AA92/A2
Ordering Nr. 44339

Variants



RB/1
Pump complete with steel discharge spout

Ordering Information

CAT. NR.	ORDERING NR.	SEALS	DISCHARGE SPOUT
RB/1	44030	NBR	Steel
◆ RB/1V	44032	VITON	Steel
RB/1H	44031	NBR	1.8 m hose with nozzle, spring & hose clamp

Key
◆ **New**

WARNING

Fuels containing Ethanol will cause more frequent replacement of rubber parts

Never operate the pump near fire or source of spark. Some media may be explosive & dangerous to pump

DELIVERS
4 litres (1.05 gal.) / 20 rotations

ROTARY BARREL PUMPS

GNB-20 GNB-25

Product Features

- Most popularly used pump worldwide. The Groz version of the Rotary Pump is superior to any other with features such as Dual Directional Operation which allows the pump to both empty, as well as refill containers
- Extremely Heavy Duty & rugged weighing 6.6 kgs (14.5 lbs)
- Pump body is sturdy cast iron with precisely machined cast iron vanes for better draw & smoother delivery
- Fits 15 gallons (50 litre) to 55 gallons (205 litre) barrels
- Comes complete with suction tube, 2" cast iron bung nut & discharge spout

WETTED COMPONENTS
Steel, Cast Iron, NBR/Viton

RECOMMENDED USE
For dispensing Diesel, Kerosene, Heating Oils , Motor Oils, Lubricating Oils (upto SAE 90), and other non-corrosive media

DO NOT USE
With water based media, Antifreeze, Solvents, Acids, and Gasoline etc.



Dual Directional Operation: Pumps in either direction by a few reverse turns of the handle








GNB-25/3R/SPL
Pump inlet threaded 1" designed for volume discharge of low to medium viscosity media

Variants



GNB-20T/SPL
Pump inlet threaded ¾" designed for use with high viscosity media

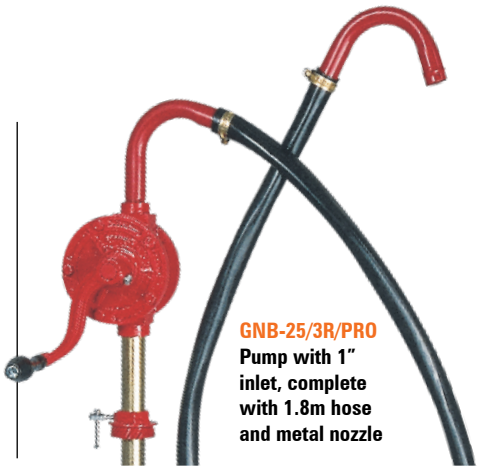

GNB-25/3R/PRO
Pump with 1" inlet, complete with 1.8m hose and metal nozzle



Rubber boot keeps rain water and contaminants away. Available as spare:
Cat. Nr. R/GNB/DN/01
Ordering Nr. 44092

Ordering Information

CAT. NR.	ORDERING NR.	PUMP INLET	SEALS	DISCHARGE SPOUT	SUCTION TUBE
GNB-20T/SPL	44000	3/4"	NBR	Steel	Telescopic
✱ GNB-25T/SPL	44050	1"	NBR	Steel	Telescopic
✱ GNB-25/3R/SPL	44052	1"	NBR	Steel	3 pc. Rigid
◆ GNB-25V/3R/SPL	44064	1"	Viton	Steel	3pc. Rigid
GNB-25/3R/PRO	44058	1"	NBR	With 1.8 m hose & metal nozzle	3 pc. Rigid
GNB-25T/PRO	44059	1"	NBR	With 1.8 m hose & metal nozzle	Telescopic

Key ✱ **Best Seller** ◆ **New**

DELIVERS

Per 20 turns for Diesel Fuel:
GNB-20: 2.85 litre (0.75 gal.)
GNB-25: 5 litre (1.30 gal.)

USEFUL TIPS!

When using with low viscosity media like Diesel, Kerosene etc., pump should be primed by adding 30 ml of media being pumped or any oil into the pump outlet

ROTARY CHEMICAL PUMP

PRP

Product Features


- Designed for use with media with which a regular cast iron or steel barrel pump cannot be used
- Pump body is made from glass filled polypropylene with Ryton veins
- All seals are from Viton & all pump hardware is Stainless Steel
- Strainer fitted at the suction tube inlet stops contaminants from entering the pump
- Complete with threaded polypropylene suction tube & a choice of two 2" bung adaptors for use on both plastic & metal drums of capacity 15 gallons (50 litre) – 55 gallons (205 litre)

WETTED COMPONENTS
Polypropylene, Ryton, Viton & Stainless Steel

RECOMMENDED USE
For dispensing water based media, antifreeze, **Urea, Adblue, DEF**, Benzene, Detergents, Glycerine, acids, chemicals etc., in addition to use with all light weight petroleum based products

DO NOT USE
With Acetone, Lacquer, Mineral Oils, Solvents, Turpentine etc.



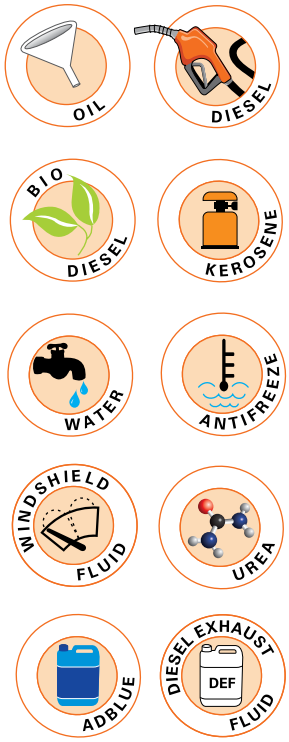

DELIVERS

5 litres (1.3 gallon) per 20 turns

Ordering Information

CAT. NR.	ORDERING NR.
PRP/01	44191

LEVER ACTION BARREL PUMPS

LBP-04 LBP-06 LBP-96

Product Features

- Most popular pump design, engineered for professional use
- Premium powder coated steel pump body with ribbed section aluminum die cast pump head for maximum strength
- Built-in 1.1/2" & 2" bung for use on drums with either openings
- Plated steel lever handle with rubber grip for convenience
- Wear resistant Brass piston rings fitted onto zinc die cast piston
- Comes complete with curved metal spout & telescopic suction tube for use on 15 gallon (50 litres) – 55 gallons (205 litre) barrels


WETTED COMPONENTS
Steel, Aluminum, Zinc, Brass, NBR & Viton*
*not on LBP-04



Variants



LBP-06
Antifreeze Barrel pump for use with Antifreeze, solvents, thinners, automotive additives, industrial chemicals, oil based fluids & other non corrosive liquids. Non return seal is Viton rubber. Pump is not suited for use with water based fluids, corrosive media, gasoline etc.

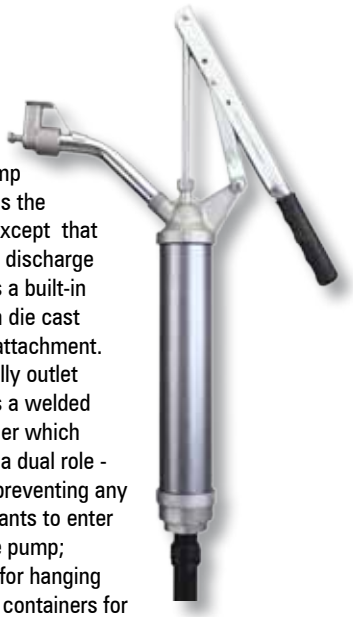

LBP-96
Basic pump is same as the LBP-06, except that the outlet discharge spout has a built-in aluminum die cast non drip attachment. Additionally outlet spout has a welded steel holder which performs a dual role - a) cover preventing any contaminants to enter inside the pump; b) holder for hanging buckets / containers for easy filling of media

LBP-04
Oil Pump for use with oil based fluids, heating oils, motor oils, heavy & light oils, Diesel & Kerosene. Non return seal is NBR. Pump is not suited for use with water based fluids, solvents, acids, antifreeze, gasoline etc.

Ordering Information

CAT. NR.	ORDERING NR.	NON RETURN SEAL
Lever Action Barrel Pump		
* LBP/04	44100	NBR
Antifreeze Barrel Pump		
LBP/06	44120	VITON
Antifreeze Barrel Pump with Nondrip		
LBP/96	44125	VITON

Key
* **Best Seller**

DELIVERS
300 ml (10 oz. / stroke)

LEVER ACTION BIO DIESEL & E85 FUEL PUMP

LBP-85


Product Features

- An extremely rugged & strong all steel pump designed specifically for use with Bio Diesel & E85 fuels
- Constructed from select materials which are compatible with Bio Diesel & E85 fuels
- Fracture proof design with steel pump head & bung
- Extra long pump body makes it easy to place refill containers on the drum for convenient filling
- Complete with telescopic suction tube for use on 15 gallons (50 litre) – 55 gallons (205 litre) barrels

WETTED COMPONENTS
Steel, Viton & PTFE

RECOMMENDED USE
Bio Diesel & E85 fuels

DO NOT USE
With Corrosive liquids, solvents, acids, alkalis etc.

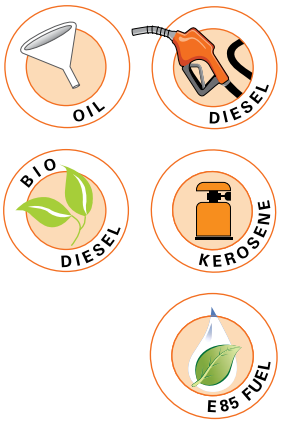



Fracture proof steel pump head

11" (280 mm) clearance between the outlet & drum for convenient placement of refill containers

Steel bung with 2" threads

WARNING

Never operate the pump near fire or source of spark. Some media may be explosive & dangerous to pump

DELIVERS

300 ml (10 oz. / stroke)

Ordering Information

CAT. NR.	ORDERING NR.	FOR USE ON
LBP/85	44109	15 gal. (50 litre) - 55 gal. (205 litre) drums

PLASTIC LEVER PUMP

PLP


Product Features

- Lever Action Barrel pump, designed for use with high viscosity oils, agricultural chemicals etc. Pump design makes it extremely convenient & comfortable to pump thick oils without excessive fatigue
- Choice of materials used in the pump construction, make it versatile for use with water based media, as well as select chemicals
- Built-In 2" Bung Adaptor allows the pump to be fixed on Drums with 2" Opening. Pump position can be adjusted using the Lock Nut incorporated in the pump body
- Pump outlet is fitted with an Air Vent Cap which when loosened breaks the Siphon action
- Supplied complete with suction tube for use with 15- 55 gl (50-205 Litre) drums & 2m x ¾" Flexible Corrugated discharge hose

WETTED COMPONENTS
Polyacetal, Polypropylene, Polyethylene, PVC & Viton

FOR USE WITH
Water-based media, detergents, soaps, antifreeze, windshield washer, Hydraulic Oils, Lubricants, Herbicides & Pesticides, Adblue, Urea, DEF etc.. Pump should only be used with Non-flammable liquids

DO NOT USE
With any media not compatible with materials used in the pump construction. These pumps must never be used for Fuel Transfer or with Thinners, Solvents etc.

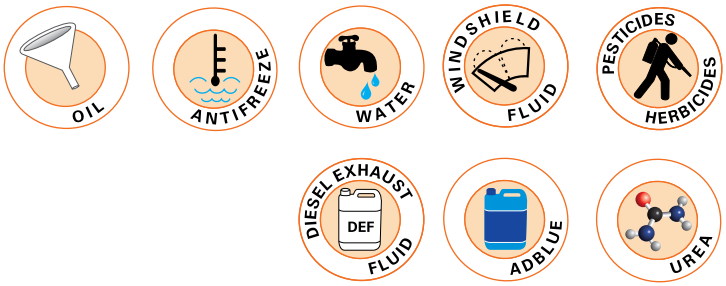



Ordering Information

CAT. NR.	ORDERING NR.
PLP/02	44185

DELIVERS

1 Pint (500 ml) per stroke

NYLON CHEMICAL PUMPS

CMP-12

Product Features

- Self priming Vertical Lift Pump designed primarily for use with lacquer thinners, Urea, AdBlue, DEF etc.
- Nylon construction with stainless steel plunger rod & PTFE seals
- Complete with 2" polypropylene bung adaptor
- Available in a choice of full length pump for use on 55 gallon (205 litre) drums or stub pump for use on 25 litre drums

WETTED COMPONENTS
Nylon, Polypropylene, Stainless Steel & PTFE

RECOMMENDED USE
Lacquer thinners, Acetone, Antifreeze, Brake Kleen, Detergents, Glycerine, Water, Weed Killer, mild acids, AdBlue, Urea, DEF, petroleum based media etc.

DO NOT USE
With strong acids, bleach, gasoline etc.





Ordering Information

	CAT. NR.	ORDERING NR.	FOR USE ON	DELIVERY
✱	CMP/12	44193	55 gal. (205 l) drums	400 ml (14 oz.)/stroke
◆	CMP/12S	44186	25 l drums	120 ml(4.20 oz.)/stroke

Key

✱ **Best Seller**
◆ **New**

DOUBLE DIAPHRAGM FUEL TRANSFER PUMP

DPP-1

Product Features


- Heavy Duty Fuel Transfer pump with discharge up to 1 gallon per 5 strokes (800 ml / stroke)
- Ideal for use where compressed air / power is not easily available such as farms / ranches, construction sites, boat etc.
- Stainless Steel Piston & fuel resistant hi-nitrile rubber diaphragm
- Includes a 2" die cast bung adaptor & extra heavy duty steel handle with security locking latch
- Pump inlet fitted with easy to clean wire mesh screen
- Complete with telescopic suction tube with non-return valve
- For use with 15 gal. (50 litre) - 55 gal. (205 litre) drums



WETTED COMPONENTS
Aluminum, Steel, Stainless Steel, Poly Acetal & NBR

RECOMMENDED USE
Gasoline, Diesel fuel, Fuel Oil, Motor Oil & other light petroleum products

DO NOT USE
With Corrosive liquids, solvents, acids, alkalis etc.

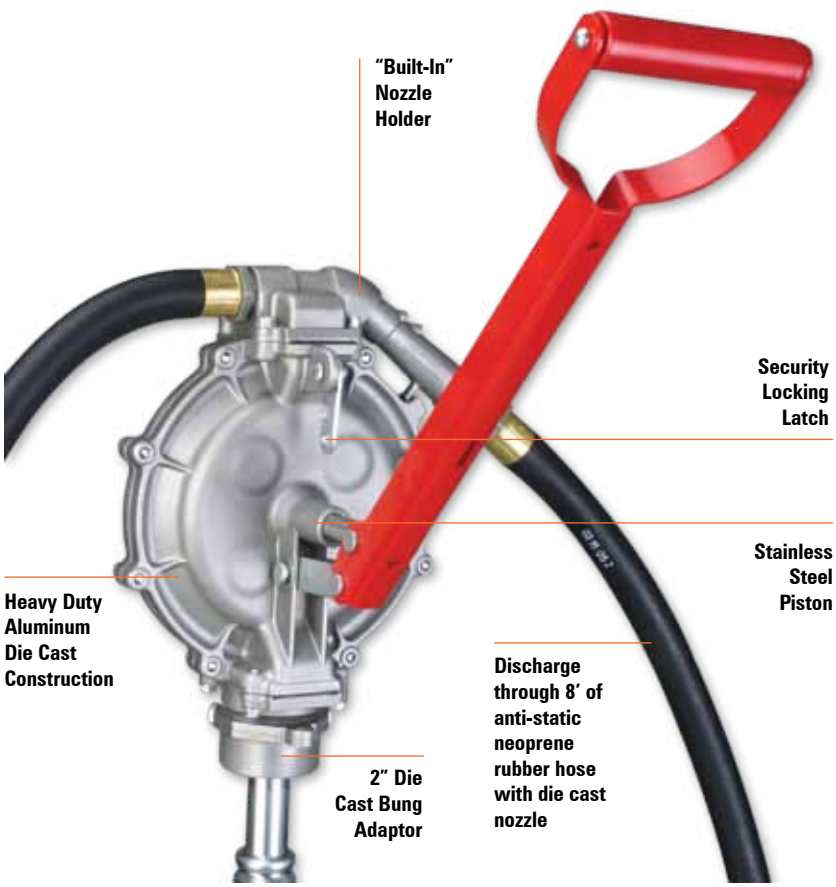


! WARNING

- Note that Fuels containing Ethanol will cause more frequent replacement of rubber parts
- **Do not use with Fuels with Ethanol content greater than 10%**
- Never operate the pump near fire or source of spark. Some media may be explosive & dangerous to pump
- Pump is designed primarily for use with low viscosity media. Pumping heavy fluids may cause undue stress resulting in fracture

DELIVERS

1 gallon in 5 strokes (800 ml per stroke)

PUMP INTERNALS

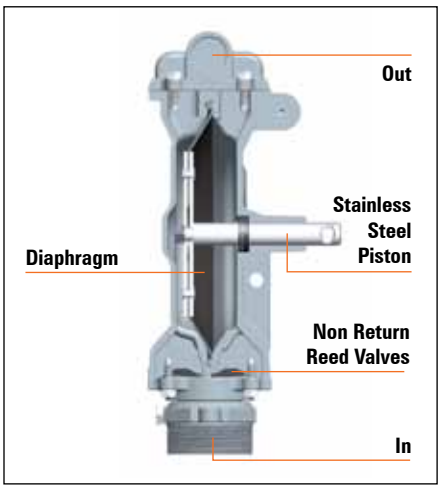

Ordering Information

CAT. NR.	ORDERING NR.	DESCRIPTION
DPP/1	44195	Complete Pump Assembly
Service Parts		
SA/HOS/RBP/3V	44338	8' x 3/4" Replacement Hose
GKT/DPP/1	44194	Non Return Reed Valve Kit

Note:
Pump has a vent/air hole built-in which will drain back any excess media into the drum

QUART / LITRE STROKE PUMP

QSP-01

Product Features


- An economical way to dispense exact quantity of media per stroke
- Heavy duty Industrial Pump that dispenses 1 Quart / 1 Litre per stroke
- Extremely useful in applications requiring metered delivery, the pump works on a precision rack & pinion mechanism
- Pump has a built in 2" Bung Adaptor & comes complete with a telescopic suction tube for use with 15 gallons (50 litre) – 55 gallons (205 litre) barrels
- **Other design features include:**
  a. Spring Loaded Drain Back Tube for overflown media
  b. Lockable handle which allows the pump to be pad locked, when not in use
  c. Lock Nut for positioning the pump outlet in any direction

WETTED COMPONENTS
Steel, Aluminum, Nitrile Rubber & Acetal


RECOMMENDED USE
Gear & Lube Oil, Petroleum based Media, Diesel & Kerosene

DO NOT USE WITH
Water Based & other corrosive fluids



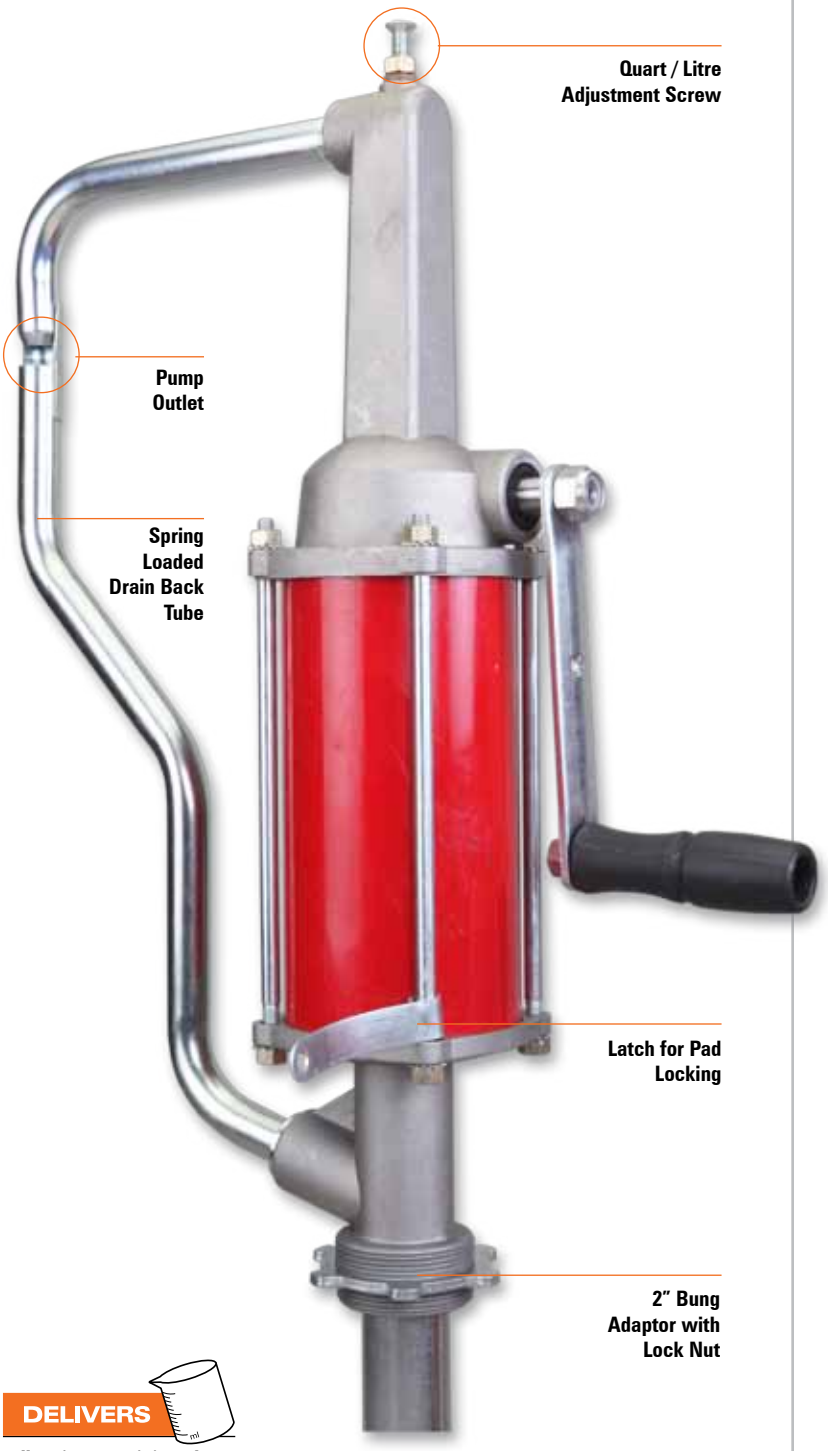

PUMP INTERNALS

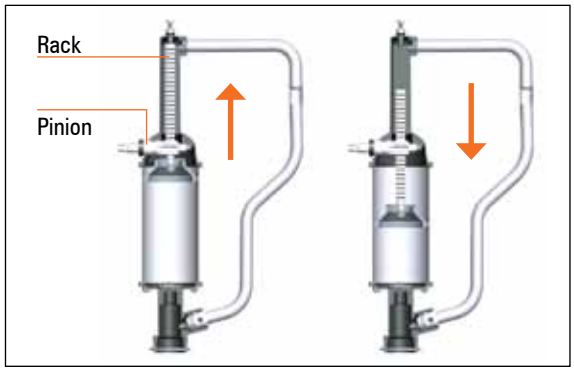

Ordering Information

CAT. NR.	ORDERING NR.
QSP/01	44187


DELIVERS
1 litre (1 quart) / stroke

F METER - HIGH ACCURACY MECHANICAL FUEL METER

NEW!

Product Features

- Worlclass Mechanical Fuel Meter, extremely compact, yet easy to read
- Robust Aluminum Die Construction
- 3 Port Design which allow the meter to be fitted In –Line or with the Inlet & outlet ports at Right Angle
- Nutating Disc Mechanism offers high tolerance to fuel contamination
- For use with Electric Fuel Pumps or gravity flow (with a minimum gravity head of 4')
- Register cap can be easily removed & rotated to every 90° orientation for display reading
- Easy user re calibration
- Works with both Fuels & Oils
- Available in Litre/Gallon version in a choice of ¾" or 1" threads

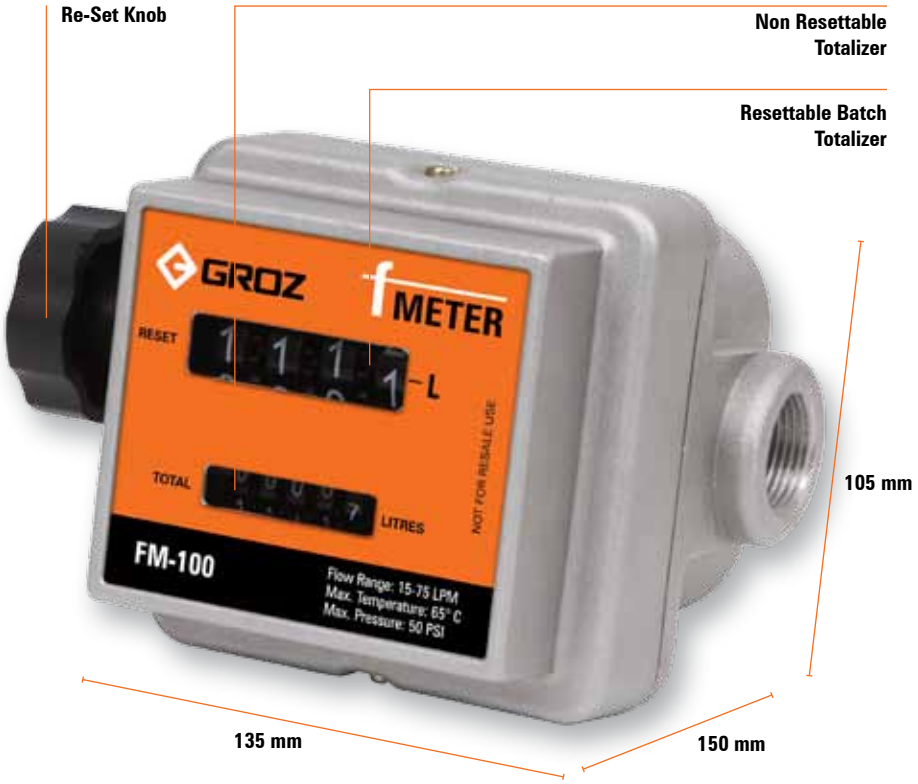

RECOMMENDED USE
Diesel, Gasoline, Biodiesel, Low to Medium Viscosity Oils

DO NOT USE WITH
Water based media

WETTED COMPONENTS
Aluminum, Poly Butylene Terephthalate (PBT), Viton, Stainless Steel



FLOW RATE

15 to 75 LPM (4 to 20 GPM)

TEMPERATURE


Working Temperature Range -10°C to 65°C (14°F to 150°F)




Maximum Working Pressure 50 PSI (3.5 BAR)

Specifications

Flow Rate	15 to 75 LPM (4 to 20 GPM)
Accuracy	+/- 1%
Repeatability	+/- 0.50%
Max. Working Pressure	50 PSI (3.5 BAR)
Working Temperature Range	-10°C to 65°C (14°F to 150°F)
Max. Resettable Batch Total	9999 Litres or 999.9 Gallons
Max. Non Resettable Totalizer	999999 Litres or 99999.9 Gallons
Least Count / Resolution	0.10 Litres or 0.10 Gallons
Meter Dimensions	5-5/16" (135 mm) Wide x 4-1/8" (105 mm) Tall x 6" (150 mm) Deep




VERSATILE MOUNTING OPTIONS

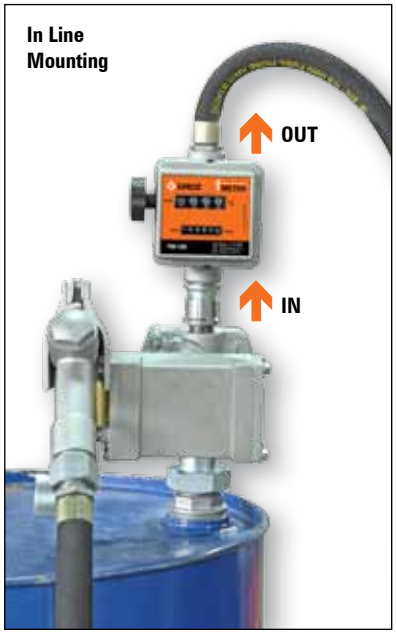



Register cap can be easily removed & rotated to every 90° orientation for display reading

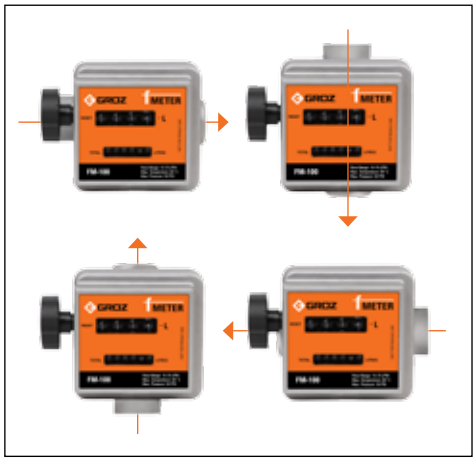

Note: Not to be used to measure media for resale


Ordering Information

CAT NR.	ORDERING #	MEASUREMENT	THREADS
FM-100/3-4/BSP	45680	Litres	3/4" BSP(F)
FM-100/3-4/N	45681	Litres	¾" NPT(F)
FM-100G/3-4/N	45682	Gallons	¾" NPT(F)
✱ FM-100/0-1/BSP	45683	Litres	1" BSP(F)
FM-100/0-1/N	45684	Litres	1" NPT(F)
✱ FM-100G/0-1/N	45685	Gallons	1" NPT(F)

Key

✱ **Best Seller**

Nutating Disc Mechanism

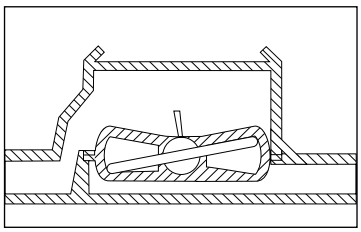

MECHANICAL DIESEL METER — FM-10

Product Features

- High Accuracy Diesel Meter with mechanical register
- Nutating Disc mechanism offers high tolerance to fuel contamination
- Meter is designed for both In-Line applications & gravity flow (with a minimum gravity head of 4')
- Ideal for use with Electric Fuel pumps
- Register cap can be easily removed & rotated to every 90° orientation for display reading
- Robust Aluminum Die Cast construction
- Easy user re calibration
- Works with both Fuels & Oils
- **Available in Litre / Gallon version**





RECOMMENDED USE
Diesel, Biodiesel, Low to Medium Viscosity Oils

DO NOT USE WITH
Gasoline, Water based media

WETTED COMPONENTS
Aluminum, Buthil Tereftalat, Nitrile Rubber

Specifications

Flow rate	20 to 120 LPM (5 to 32 GPM)
Accuracy	+ / - 1%
Repeatability	+ / - 0.30%
Max. Working Pressure	145 PSI (10 BAR)
Burst Pressure	435 PSI (30 BAR)
Pressure Loss	3 PSI (0.20 BAR)
Working Temperature range	-10°C to 60°C (14°F to 140°F)
Max. Resettable Batch Total	999 Litres or 99.9 Gallons
Max. Non Resettable Totalizer	9,99,999 Litres or 99999.9 Gallons
Least Count /Resolution	0.10 Litres or 0.10 Gallons
Max. Viscosity of Media	2,000 cst



FLOW RATE
20 to 120 LPM (5 to 32 GPM)



TEMPERATURE
Working Temperature Range
-10°C to 60°C (14°F to 140°F)



Maximum Working Pressure
145 PSI (10 BAR)



Display can be changed by rotating the card in its housing thus ensuring greater versatility in positioning


Ordering Information

CAT NR.	ORDERING #	MEASUREMENT	THREADS
✱ FM-10/0-1/BSP	45640	Litres	1" BSP (F)
FM-10/0-1/N	45642	Litres	1" NPT (F)
✱ FM-10G/0-1/N	45641	Gallons	1" NPT (F)

Note: Not to be used to measure media for resale

Key

✱ **Best Seller**

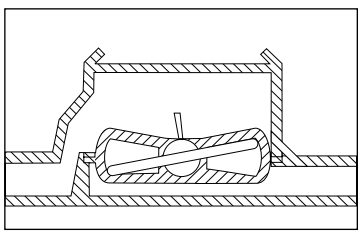

Nutating Disc Mechanism

DIGITAL FUEL METER

FM-20

Product Features

- Digital Turbine meter for low viscosity fluids, easy to install in line or for end of the line applications
- Polypropylene Turbine measuring mechanism
- Electronic Display using two AAA 1.5V batteries
- Polyamide body and sealed electronic card make it suitable for use in severe weather conditions
- Display can be rotated in 4 different positions
- **Measures in Litres, Quarts, Pints & Gallons**
- Easy user re calibration
- Includes one additional stainless steel adaptor to convert from 1" male to 1" female threads





Stainless Steel adaptor provided with each meter to convert from 1" male to 1" female threads

RECOMMENDED USE
Diesel, Gasoline, Bio Diesel, Windshield Fluid, Water

DO NOT USE WITH
Oils

WETTED COMPONENTS
Polyamide, Polypropylene, Viton

Specifications

Flow rate	5 to 120 LPM (1.3 to 32 GPM)
Accuracy	+ / - 1 %
Repeatability	+ / - 0.30%
Max. Working Pressure	300 PSI (20 BAR)
Burst Pressure	580 PSI (40 BAR)
Pressure Loss	0.50 PSI (0.04 BAR)
Working Temperature range	-10°C to 50°C (14°F to 122°F)
Max. Resettable Batch Total	99,999 units
Max. Non Resettable Totalizer	9,99,999 units
Least Count /Resolution	0.001 units
Max. Viscosity of Media	5.35 cst
Water Resistance	IP55



Maximum Working Pressure 300 PSI (20 BAR)

FLOW RATE

5 to 120 LPM (1.3 to 32 GPM)

TEMPERATURE


Working Temperature Range -10°C to 50°C (14°F to 122°F)

Ordering Information

CAT NR.	ORDERING #	THREADS
FM-20/0-1/BSP	45650	1" BSP (M)
FM-20/0-1/N	45651	1" NPT (M)

Note: Not to be used to measure media for resale

Display can be changed by rotating the card in its housing thus ensuring great versatility in postioning

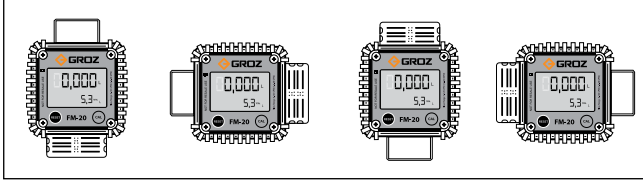

FUEL CONTROL NOZZLES - MANUAL

FCN

Product Features


- For use with Electric Fuel Pumps & gravity feed applications
- All Metal Construction with the Body, Discharge Spout, Trigger & Guard made from Aluminium
- Hose Swivel at Inlet for increased maneuverability & convenience in use
- Manual control. Also includes continuous flow switch for unattended dispensing
- Designed for minimal back pressure & reduction in flow
- 6-5/16" (160 mm) long Spout
- For use with Diesel, Kerosene & Gasoline

WETTED COMPONENTS
Aluminum, Steel, Nylon, Nitrile Rubber

Note
Fuel Nozzles can also be custom manufactured with curved Discharge Spout



Maximum Pressure
50 PSI (3.45 BAR)

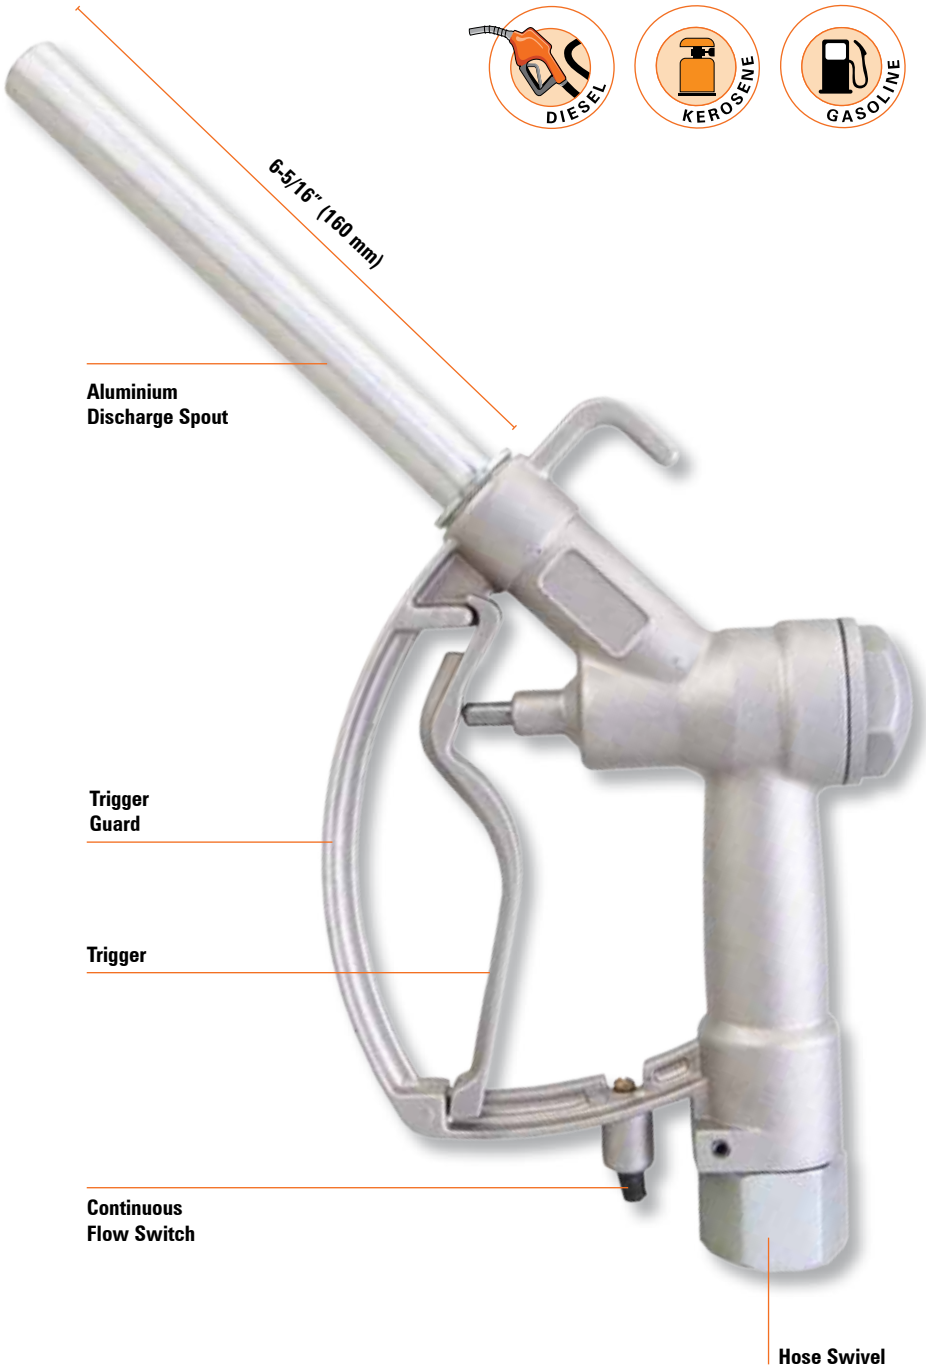

Ordering Information

CAT. NR.	ORDERING NR.	FOR USE WITH	INLET THREADS	SPOUT DIA. (OD)	SPOUT DIA. (ID)	MAX. FLOW RATE
FCN/S/3-4/3-4/BSP	45580	Diesel & Gasoline	3/4" BSP (F)	3/4" (19 mm)	0.61" (15.6 mm))	15 GPM (57 LPM)
FCN/S/0-1/0-1/BSP	45581	Diesel	1" BSP (F)	1" (25 mm)	0.86" (22 mm)	20 GPM (75 LPM)
FCN/S/3-4/3-4/N	45590	Diesel & Gasoline	3/4" NPT (F)	3/4" (19 mm)	0.61" (15.6 mm))	15 GPM (57 LPM)
FCN/S/0-1/0-1/N	45591	Diesel	1" NPT (F)	1" (25 mm)	0.86" (22 mm)	20 GPM (75 LPM)

FUEL CONTROL NOZZLES - AUTOMATIC

FCNA

Product Features

- For Use with Electric Fuel Pumps
- Dual Mode: Manual & Automatic. Sensor built into the discharge spout outlet automatically shuts off supply once fuel level in the tank reaches that of the outlet discharge spout
- Heavy Duty Cast Aluminum Body, Trigger & Guard from Thermoplastic & protective vinyl grip on the nozzle body
- Available both with & without swivel

RECOMMENDED USE
Diesel, Kerosene, Leaded & Unleaded Gasoline

WETTED COMPONENTS
Aluminum, Steel, Nitrile Rubber



Also available with swivel



Maximum Pressure 50 PSI (3.45 BAR)

Ordering Information

CAT NR.	ORD NR.	FOR USE WITH	SPOUT TYPE	INLET THREADS	SPOUT DIA (OD)	SPOUT DIA (ID)	MAX. FLOW RATE
WITHOUT SWIVEL							
✱ FCNA/3-4/N	45570	Diesel & Gasoline	Straight	3/4" NPT (F)	0.83" (21 mm)	0.63" (16 mm)	15 GPM (57 LPM)
✱ FCNA/0-1/N	45571	Diesel	Curved with Spring	1" NPT (F)	1.06" (27 mm)	0.83" (21 mm)	30 GPM (110 LPM)
WITH SWIVEL							
◆ FCNA/S/3-4/BSP	45572	Diesel & Gasoline	Straight	3/4" BSP (F)	0.83" (21 mm)	0.63" (16 mm)	15 GPM (57 LPM)
◆ FCNA/S/3-4/N	45573	Diesel & Gasoline	Straight	3/4" NPT (F)	0.83" (21 mm)	0.63" (16 mm)	15 GPM (57 LPM)
◆ FCNA/S/0-1/BSP	45574	Diesel	Curved with Spring	1" BSP (F)	1.06" (27 mm)	0.83" (21 mm)	30 GPM (110 LPM)
◆ FCNA/S/0-1/N	45575	Diesel	Curved with Spring	1" NPT (F)	1.06" (27 mm)	0.83" (21 mm)	30 GPM (110 LPM)

Key ✱ **Best Seller** ◆ **New**

FUEL CONTROL NOZZLES - METERED

FM20-FCN

Product Features

- Manual Fuel Control Nozzle fitted with Digital Fuel Meter
- Nozzle with Die cast Aluminum Construction with built in Swivel at inlet and switch for un-attended continuous dispensing
- Polypropylene Turbine measuring mechanism
- Electronic Display using two AAA 1.5V batteries
- Polyamide meter body and sealed electronic card makes it suitable for use in severe weather conditions
- **Measures in Litres, Quarts, Pints & Gallons**
- Easy user re calibration

RECOMMENDED USE
Diesel, Gasoline

DO NOT USE WITH
Oils

WETTED COMPONENTS
Polyamide, Polypropylene, Aluminum, Steel, Nylon, Nitrile Rubber, Viton



Specifications

Flow rate	5 to 75 LPM (1.3 to 20 GPM)
Accuracy	+ / - 1 %
Repeatability	+ / - 0.30%
Max. Working Pressure	50 PSI (3.45 BAR)
Working Temperature range	-10°C to 50°C (14°F to 122°F)
Max. Resettable Batch Total	99999 units
Max. Non Resettable Totalizer	999999 units
Least Count /Resolution	0.001 units
Max. Viscosity of Media	5.35 cst
Water Resistance	IP55
Inlet	¾" (F) or 1" (F)



Maximum Working Pressure
50 PSI (3.45 BAR)

TEMPERATURE
Working Temperature Range
-10°C to 50°C (14°F to 122°F)

FLOW RATE
5 to 75 LPM (1.3 to 20 GPM)

Ordering Information

CAT NR.	ORDERING #	INLET THREADS	OUTLET SPOUT (OD)
FM-20/FCN/3-4/BSP	45660	3/4" BSP (F)	3/4" (19 mm)
FM-20/FCN/3-4/N	45661	3/4" NPT (F)	3/4" (19 mm)
FM-20/FCN/0-1/BSP	45665	1" BSP (F)	1" (25 mm)
FM-20/FCN/0-1/N	45666	1" NPT (F)	1" (25 mm)

FUEL FILTER - SPIN ON CARTRIDGE STYLE

NEW!

FFS-10

Product Features

- High Flow Fuel Filter, complete with 10 micron Spin-On style filter cartridge
- Aluminum Die Cast Head, vacuum impregnated for leakproof operation
- Inlet & Outlet threaded 1" (F)
- Fits spin on cartridges with 1-1/2"-16 UNF threads
- Designed for use on both mobile & stationary fuel tanks and on gasoline & diesel fuel pumps
- Ideal for use in construction & agricultural applications
- Removes particulate contaminants such as dirt, dust & rust
- Replacement Spin-On Filter cartridges available as spare

RECOMMENDED USE
Gasoline, Diesel Fuel

DO NOT USE
With water based products, Aviation Fuels, Race Fuels etc.



Max. Working Pressure 50 PSI (3.45 BAR)

FLOW RATE

Max. Flow: 20 GPM (75 LPM)



Aluminum die cast filter head threaded 1" at the inlet

Aluminum die cast filter head threaded 1" at the outlet

Spin-On Filter Cartridge

FFS/10/N


Ordering Information

CAT. NR.	ORDERING NR.	FILTER ELEMENT	INLET/OUTLET
Fuel Filter			
FFS/10/BSP	45900	10 μ Filter	1" BSP (F)
FFS/10/N	45901	10 μ Filter	1" NPT(F)
FFS/10WB/BSP	45902	10 μ Water Block Filter	1" BSP (F)
FFS/10WB/N	45903	10 μ Water Block Filter	1" NPT(F)
Replacement Cartridge			
FF/FFS/10	45910	10 μ Filter	
FF/FFS/10-WB	45911	10 μ Water Block Filter	

FF/FFS/10



Mounting Holes 5/16"-18 BSW



1-1/2"-16 UNF Threads

FUEL FILTER

FFL-02

Product Features

- High Flow Fuel filter, complete with 10 micron fuel filter element
- Durable & lightweight design for easy installation on both mobile & stationary fuel tanks and on gasoline & diesel fuel pumps
- Ideal for use in agricultural & industrial applications
- Rust & weather resistant for years of service
- The 10 micron paper filter element filters even small particles of rust, scale, grit, dirt, sand & lint at a gravity flow of 19 litres / minute (5 GPM) with only a 24" (600 mm) head. The filter element has 366 square inches of filtering surface which results in more particle retention, which means cleaner fuel, and fewer costly engine repairs
- Replacement filter elements available as spare
- Also available water block fuel filter element which separates water from fuel

WETTED COMPONENTS
Aluminum, Polypropylene, NBR, Steel, Paper element, Nylon, Brass

RECOMMENDED USE
Gasoline, Diesel Fuel

DO NOT USE
With water based products, Gasohol, Aviation fuels, Race Fuels etc.



Max. Working Pressure 150 PSI (10 BAR)



Aluminium die cast filter head is threaded 1" at the inlet & outlet

Translucent polypropylene filter bowl gives a visual check of the filter element & permits removal of sediment & water in the bowl

REPLACEMENT FILTER ELEMENT



Brass drain cock can be operated by a simple turn & releases accumulated water & unwanted contaminants


NOTE:
Filters are also custom manufactured with 15μ Filter Element

Ordering Information

CAT. NR.	ORDERING NR.	FILTER ELEMENT	INLET/ OUTLET
FUEL FILTER			
* FFL/02/BSP	44390	10 μ Filter	1" BSP(F)
* FFL/02/N	44391	10 μ Filter	1" NPT(F)
FFL/02WB/BSP	44392	10 μ Water Block Filter	1" BSP(F)
FFL/02WB/N	44393	10 μ Water Block Filter	1" NPT(F)
REPLACEMENT FILTER ELEMENT			
* FF/FFL/10	44395	10 μ Filter	
FF/FFL/10-WB	44397	10 μ Water Block Filter	

Key * **Best Seller**

FUEL FILTER INSTALLATION

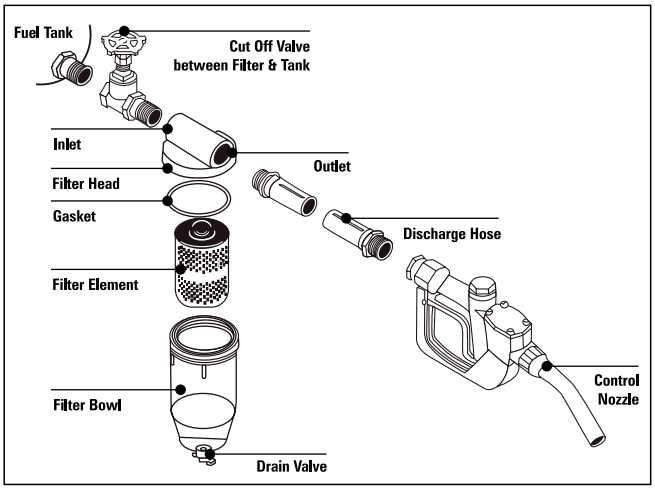

FILTER WRENCH

NEW!

Product Brief

- Easy to use Filter Wrench for removing Filter Bowl when changing Filter element
- Weather Resistant re-inforced Nylon construction won't damage the bowl like metal oil filter wrenches
- Specially designed to fit Groz FFL-02 fuel filter bowl. It additionally fits filters from several other makers such as:
  Goldenrod Model 495 & 496
  Baldwin Model B10AL
  National Spencer Model NS-10
  John Deere TY15192 & TY15677 etc.
- Wire through hole provided for attaching to fuel tank



Ordering Information

CAT NR.	ORDERING #
FW/FFL-02	44394

Groz Engineering Tools (P) Ltd.
Groz Net Industries

Village Kherki Daula, National Highway-8
Gurgaon-122001, Haryana, INDIA
TEL +91.124.282.7700 / 221.4050
FAX +91.124.2827986 / 221.4224
FAX (USA) +1.509.271.7848
FAX (UK) +44.870.121.1854

E-MAIL info@groz-tools.com
URL www.groz-tools.com

The GROZ name, GROZ logo and the mark are trademarks of Groz Engineering Tools (P) Ltd., India



Whilst every effort has been made to ensure accuracy of information given in this catalogue at the time of going to print, Feb 2012, our policy of continuous improvement determines the right to change specifications without notice. Customers must ensure that goods are suitable for the purpose intended.