www.groz-tools.com



LUBRICATION EQUIPMENT



GROZ

CI-20

GROZ

Groz has always exceeded the expectations of tool manufacturers and users world wide. Groz carefully makes each tool under stringent quality control processes that are achieved in a hi-tech manufacturing environment.



A most modern & vertically integrated manufacturing facility spanning over 500,000 sq ft



Total quality & control via advanced horizontal & vertical machining centres



Robotically armed & conveyorized double booth powder coating plant with a capacity of 15 million sq inches / month



Pressure die casting - Plc controlled semi automatic equipment.



The heart of our operation is the design center, where our research & product development specialists use high end software & equipment to develop custom solutions

Certified ISO/TS 16949 by

BVQi

DNV

ISO 9001:2000

Quality Assurance Statement

The satisfaction of all customers is the fundamental principle of the GROZ corporate philosophy.

GROZ stands committed to the quality of its products and service with the assurance of complete back-up support.

With a wide range of products, prompt service and vast experience, GROZ remains dedicated to the customer.

GROZ

tools to trust

WHAT'S NEW

www.groz-tools.com



19.2V BATTERY POWERED GREASE GUN

PG 4



PG 30

ELECTRIC DIESEL PUMP

WASTE OIL DRAIN GRAVITY FEED


PG 26



PG 39


FUEL FILTER SPIN ON CARTRIDGE STYLE



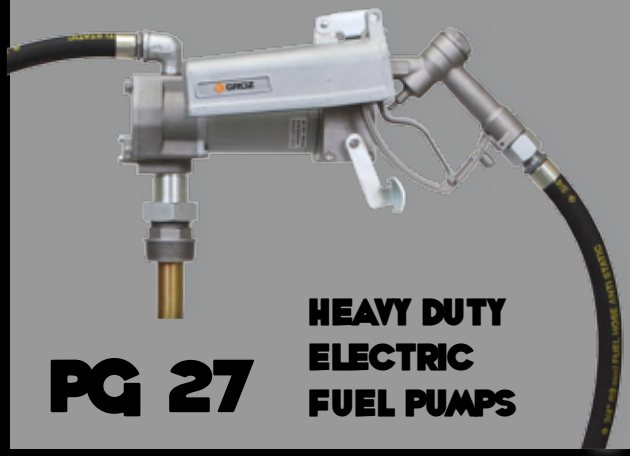

PG 27

HEAVY DUTY ELECTRIC FUEL PUMPS

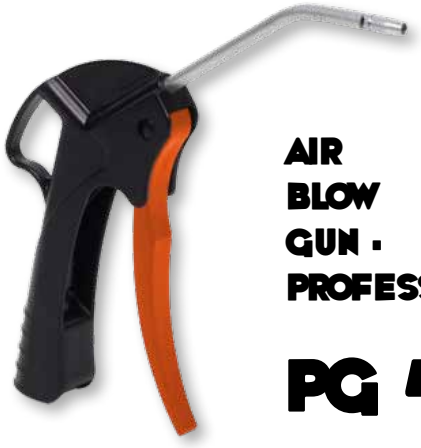

AIR BLOW GUN - PROFESSIONAL

PG 44

WHAT'S WHERE

www.groz-tools.com

GREASING EQUIPMENT / 04

04 Battery Powered Grease Gun
06 Manual Grease Guns
08 Air Operated Grease Guns
08 Grease Gun Accessories
10 Greasing Fitting
11 Manual Grease Pumps
13 Air Operated Grease Pumps
15 Grease Control Valves

OILING EQUIPMENT / 16

16 Manual Oil Pumps
16 Oil Pump Accessories
18 Air Operated Oil Pumps
21 Electric Oil Pumps
21 Oil Control Gun & Meters

WASTE OIL HANDLING / 25

25 Air Operated Double Diaphragm Pumps
26 Waste Oil Drain

FUEL EQUIPMENT / 27

27 Electric Fuel Pumps
30 Electric Diesel Pumps
31 Manual Fuel Pumps
33 Fuel Meters & Nozzles
38 Fuel Filters

SPECIALITY PUMP / 40

HOSE REELS / 41

DRUM HANDLING / 42

AIR LINE ACCESSORIES / 43

AIR BLOW GUNS / 44

Whilst every effort has been made to ensure accuracy of information given in this catalogue at the timeof going to print, November 2013, our policy of continuous improvement determines the right to change specifications without notice. Customers must ensure that goods are suitable for the purpose intended.

GROZ

GROZ

NEW MAXPOWER

19.2V BATTERY POWERED GREASE GUN



Comes with Blow Moulded Case for convenient storage when not in use

POWER GREASING

19.2V CORDLESS GREASE GUN THAT PROVIDES UNMATCHED POWER, TORQUE & EFFICIENCY RESULTING IN HIGHER PRESSURE & MORE GREASE PER BATTERY CHARGE

AUTOMOTIVE

INDUSTRIAL

CONSTRUCTION

AGRICULTURE

GREASING EQUIPMENT

GROZ

19.2V BATTERY POWERED GREASE GUN

- Powerful 19.2V High Torque Motor
- 8,500 PSI (586 BAR) Output Grease Pressure
- Grease Output upto 3 oz. (85 gms) / minute in free flow
- Automatic Air Bleeder
- Additional Port to add Bulk Loader
- Grease Gun Barrel with double lipped follower for use with 14oz. (400 gm) grease cartridge or 500 cc Bulk Fill
- 30" High Pressure Hose with spring guard on both ends (prevents hose from kinking)
- High Pressure Grease / Coupler
- Standard 1.5Ah Ni-Cd Battery Pack
- An additional 1.5Ah Ni-Cd Battery Pack for un-interrupted greasing
- One Hour Quick Charger (each battery charge provides power to dispense upto 6 grease cartridges in free flow condition
- Designed for use by mechanics, technicians, maintenance staff, farmers etc. for everyday greasing & preventive maintenance jobs, from automotive, trucking and fleet to agriculture, construction & industry






8,500 PSI (586 BAR)



SUCTION FILL



CARTRIDGE LOADING



Upto 3 oz. (85 gms) / minute


Art. Nr.	Description	Box Qty.
Grease Gun Assembly		
BPGG/19/EU	Cordless Grease Gun with 220V/50 Hz. Battery Charger with EU Plug	1
Spare Parts & Accessories		
RB/BPGG/19N	Rechargeable Battery, 19.2V, 1.5 Ah, Ni-Cd	1
BC/BPGG/19N/EU	1 Hour CE Energy Saving Battery Charger, 220V /50 Hz, 19.2V, EU plug	1

GREASING EQUIPMENT

THE ULTIMATE LEVER GREASE GUN

5 YEAR WARRANTY

For those who want to be ahead of the game!

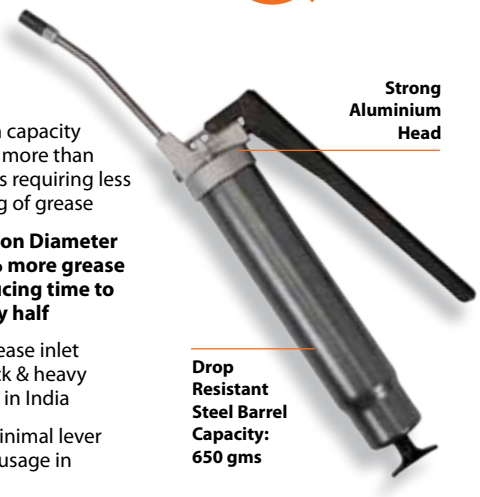

- Large barrel with capacity of 650 gms, 30% more than regular guns thus requiring less frequent re-filling of grease
- **30% Larger Piston Diameter pushes out 50% more grease per stroke, reducing time to grease a joint by half**
- Large Venturi Grease inlet designed for thick & heavy grease, common in India
- Operates with minimal lever action, allowing usage in confined areas
- Solid Aluminum Grease Gun head fitted with loader valve for use with Grease Filler Pump
- Heavy Gauge Drop Resistant Steel Barrel in premium metallic powder coated finish
- Hi Compression spring for removing air pockets from grease
- Works with NLGI 1, 2 & 3 greases
- Fully serviceable with no riveted parts
- Develops: 10,000 PSI



10,000 PSI (690 BAR)



Variable Stroke




1.5gm / Stroke

Art. Nr.	Details	Box Qty.
K45R/B	150mm rigid steel extension & 3 jaw Super Coupler	10

LEVER GREASE GUN - HEAVY DUTY

- Aluminium head with air bleeder & bulk loader
- Variable stroke feature built-in for usage in confined spaces
- **Resists back pressure, especially useful in chain tightening of earth moving equipment**
- Develops: 10,000 PSI
- Capacity: 500 gms bulk / 400 gms cartridge

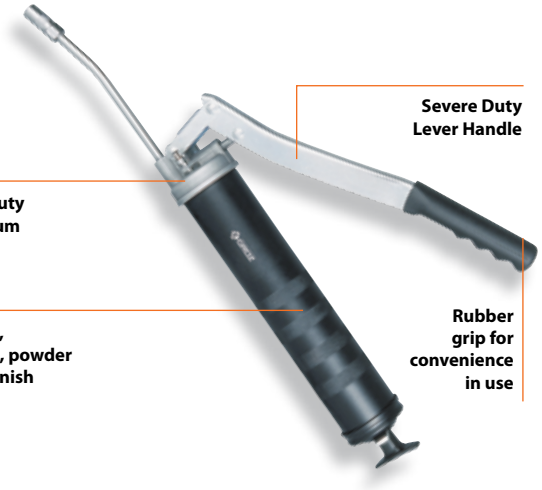



Heavy duty Grease Gun Head incorporates a bulk loader & an air bleeder valve



10,000 PSI (690 BAR)



Variable Stroke



1gm / Stroke

Art. Nr.	Details	Box Qty.
G1R/HD/B	150mm rigid steel extension & 4 jaw coupler	16

LEVER GREASE GUNS

- 21st century design - ideal combination of superior quality & value price
- Aluminium Die Cast head with built-in air release valve
- Choice of high visibility orange powder coated finish or textured black
- Develops: 6,000 PSI
- Capacity: 500 gms bulk / 400 gms cartridge



V1R/B



6,000 PSI (413 BAR)



1gm / Stroke

series V

Art. Nr.	Details	Colour	BoxQty.
V1R/B	150mm rigid steel extension & 4 jaw coupler	Orange	16
V1R/BL/B	150mm rigid steel extension & 4 jaw coupler	Black	16

LEVER GREASE GUN - SUPER VALUE

- **Most popular value priced Grease Gun**
- Steel head incorporates a bulk loader valve
- Rubber grip on lever handle for comfortable use
- Powder coated finish
- Develops: 6,000 PSI
- Capacity: 500 gms bulk / 400gms cartridge



6,000 PSI
(413 BAR)





1gm / Stroke

Art. Nr.	Details	Box Qty.
G1R/B/T/EC/BL	With 150mm rigid steel extension & 4 jaw coupler	16

PISTOL GREASE GUN

- One Hand Operation
- Aluminum Die cast head with steel block nut
- Ideal for greasing fittings with limited access
- Develops: 5,000 PSI
- Capacity: 500 gms bulk / 400 gms cartridge





5,000 PSI
(345 BAR)



0.5gm / Stroke

Art. Nr.	Details	Box Qty.
G5R/B	With 100mm rigid steel extension & 4 jaw coupler	16

MINI LEVER GREASE GUN

- Compact tool box size Grease Gun
- Aluminium Die Cast Gun Head
- Develops: 6,000 PSI
- Capacity: 120cc bulk/ 85 gms grease cartridge





6,000 PSI
(413 BAR)



0.55gm / Stroke

Art. Nr.	Details	Box Qty.
G14R/B	150mm steel extension and 4 jaw coupler	30

MINI PISTOL GREASE GUN – PROFESSIONAL

- **Toolbox Size Deluxe Mini Pistol Grease Gun**
- Aluminum cast head with front & top discharge ports
- Ideal for greasing in tight spaces such as CNC machines
- Develops: 3,500 PSI
- Capacity: 120 gms bulk/ 85 gms grease cartridge





3,500 PSI
(240 BAR)




0.30 gm / stroke

Art. Nr.	Details	Box Qty.
G-16/B	100mm rigid steel extension & 4 jaw coupler	30

GREASING EQUIPMENT

AIR OPERATED GREASE GUN – CONTINUOUS


- Continuous flow of grease with press of the trigger
- Air Inlet Pressure: 60 - 120 PSI (4-8 BAR).
- For use in factory maintenance, fleet, trucks etc.
- Develops: 4,800 PSI
- Capacity: 500 gms bulk / 400 gms cartridge

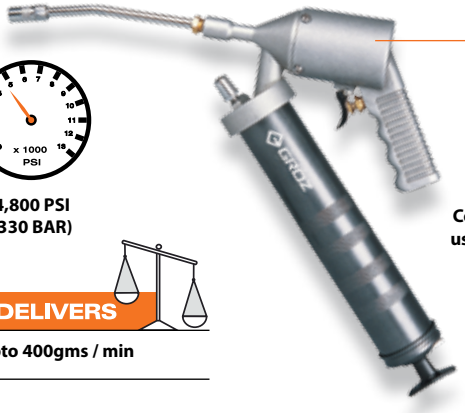

Art. Nr.	Details	Box Qty.
AGG/1R/B	150mm rigid steel extension & 4 jaw coupler	4

PUSH TYPE GREASE GUNS

- Toolbox size, spring loaded Push type Grease Guns
- Steel body fitted with universal connector
- Ideal for greasing of Impact Wrenches, Chain Saws, Trailers, Pallet Trucks etc.
- Develops: 1,000 PSI



Align Push Gun straight with fitting


Push with palm of hand



1,000 PSI (69 BAR)

DELIVERS
0.90gm / Shot

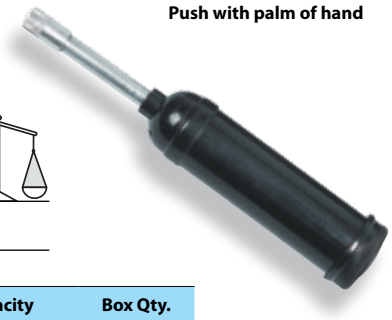

Art. Nr.	Capacity	Box Qty.
G6P	30 gms	30
G7P	125 gms	20

GREASE CARTRIDGE

Made in USA

- 400 gms of Premium Lithium Complex Red Grease
- NLGI Grade II
- Operating Temperature: – 40°C to 149°C
- Non messy, totally clean, offers highest convenience in use
- Useful in automotive, industrial, construction & agricultural applications
- For use with Groz Grease Guns



Art. Nr.	Capacity	Box Qty.
CTG/01	400 gms	10

GREASE GUN COUPLERS

- High Performance Couplers
- Available in 3 or 4 jaw construction. Jaws are made from hardened spring steel
- Incorporate a spring loaded ball check mechanism
- Threaded 1/8"BSPT(F)
- Available in 3 types: Standard, Professional & Heavy Duty




Standard 3,000 PSI For hand operated grease guns only


Professional 6,000 PSI For hand operated grease guns only


Heavy Duty 10,000 PSI For hand & air operated grease guns

Art. Nr.	Type	PressureRating	Nr. of Jaw	Box Qty.
HC/11/4/B	Standard	3,000 PSI	4	500
HC/14/3/B	Professional	6,000 PSI	3	500
HC/14/4/B	Professional	6,000 PSI	4	500
HC/12/3/B	Heavy Duty	10,000 PSI	3	500
HC/12/4/B	Heavy Duty	10,000 PSI	4	500
HC/11/4/B/ST54	Set of 54 Standard 4 jaw couplers	3,000 PSI	4	1
HC/14/4/B/ST54	Set of 54 Professional 4 jaw couplers	6,000 PSI	4	1

360° SWIVEL COUPLER

- Ideal for greasing of difficult & hard to reach fittings
- Swivels in full 360° circle & locks at any 45° position
- Hardened Spring Steel Jaws
- 3 jaw construction with ball check
- Hardened coupler body withstands high pressure applications without deformation



Art. Nr.	Box Qty.
HC/SW/3/B	10



7,000 PSI (483 BAR)



For Hand Operated Grease Guns Only

BUTTON HEAD COUPLERS

- For greasing of button head grease fittings
- Zinc Die cast body
- Mostly used on heavy machinery & contractors equipment
- 3 Types: Push-On, Hook-On & Swivelling



BHC/10/B



HOC/1/B



For Hand Operated Grease Guns Only



PCN/1/B




PCN/2/B
PCN/3/B

Art. Nr.	Type	Pressure Rating	For Button Head Fitting Size	Box Qty.
BHC/10/B	Heavy Duty Swivelling	3,000 PSI	16mm	20
HOC/1/B	Fixed Hook On	3,000 PSI	16mm	50
PCN/1/B	Fixed Push On	3,000 PSI	16mm	50
PCN/3/B	Fixed Push On	6,000 PSI	16mm	20
PCN/2/B	Fixed Push On	7,500 PSI	22mm	20

4 WAY GREASE FITTING TOOLS

- Dual purpose tool for removing worn & broken grease fittings and re-tapping holes for installing new fittings
- Built-in hardened tap for re-tapping holes
- Works well with straight & angled fittings

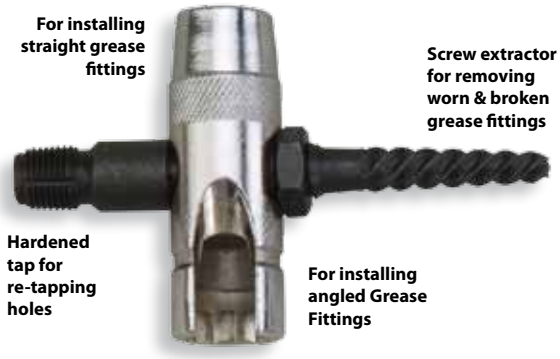

Art. Nr.	Installs Fittings	Tap Rethreads	Box Qty.
ESO/1	M6 X 1, M8 X 1	1/4" SAE (LT)	10
ESO/2	1/8" BSPT, M8 X 1, M10 X 1	1/8" NPT	10

GREASE FITTING THREAD TESTER

- Great tool box accessory to sort out mixed fittings
- Aluminium construction with mounting holes



Designed to check the following threads:

Thread Type	Size			
NPT	1/8"	1/4"	3/8"	
METRIC	M6 X 1	M6 X 0.75		
METRIC	M8 X 1	M8 X 1.25		
METRIC	M10 X 1	M10 X 1.5		
BSPT	1/8"	1/4"		
UNF/ANF	1/4"	5/16"	3/8"	
BSW	1/4"	5/16"	1/2"	3/8"
BSF	3/16"	1/4"	5/16"	

Art. Nr.	Box Qty.
THT/01	5

GREASING EQUIPMENT

GREASE GUN HOSES

- For greasing fittings with difficult access
- Thermoplastic Construction, Fully Flexible
- Zinc plated steel end connections threaded 1/8" BSPT (M) are hydraulically crimped to the hose





For Hand Operated Grease Guns Only



Working Pressure: 3,500 PSI
Burst Pressure: 10,000 PSI

Art. Nr.	Length (end to end)	Box Qty.
GHC-12/B	300mm (12")	30
GHC-18/B	450mm (18")	20
GHC-20/B	500mm (20")	10

GREASE GUN STEEL EXTENSIONS

- Steel construction
- Zinc plated finish
- High strength rolled 1/8" BSPT(M) threads on both ends





For Hand Operated Grease Guns Only

Working Pressure: 6,000 PSI
Burst Pressure: 12,000 PSI

Art. Nr.	Length (end to end)	Type	Box Qty.
GBP/6/B	150mm (6")	Bent	50
GSP/4/B	100mm (4")	Straight	20

GREASE FITTINGS

- Head profile as per DIN 71412
- Heat treated greasing end
- Zinc Plating exceeds ASTM B117
- Fittings have heat treated springs for increased life



6,000 PSI
413 (BAR)



Grease Fitting – Straight



Angled Grease Fitting - 45°



Angled Grease Fitting - 90°


Art. Nr.	Description	Hex Size	Overall Length	Box Qty.
6.0 x 1.0mm Taper Threads				
GFT/6/1	Straight	7mm	16mm	100
GFT/6/1/45	45°	9mm	21mm	50
GFT/6/1/90	90°	9mm	18mm	50
8.0 X 1.0mm Taper Threads				
GFT/8/1	Straight	9mm	16mm	100
GFT/8/1/45	45°	9mm	21mm	50
GFT/8/1/90	90°	9mm	18mm	50
10.0 X 1.0mm Taper Threads				
GFT/10/1	Straight	11mm	16mm	100
GFT/10/1/45	45°	11mm	21mm	50
GFT/10/1/90	90°	11mm	18mm	50
10.0 mm X 1.5 mm Taper Threads				
GFT/10/1.5	Straight	11mm	18mm max.	100
GFT/10/1.5/45	45°	11mm	21mm max.	50
GFT/10/1.5/90	90°	11mm	18mm max.	50
1/8" X 28 BSPT - Taper Threads				
GFT/R/1-8/28	Straight	11mm	16mm	100
GFT/R/1-8/28L	Straight	11mm	20mm	100
GFT/R/1-8/28/45	45°	11mm	21mm	50
*GFT/R/1-8/28/45L	45°	11mm	26.3mm	50
GFT/R/1-8/28/90	90°	11mm	18mm	50
*GFT/R/1-8/28/90L	90°	11mm	21.4mm	50
1/4" X 19 BSPT - Taper Threads				
GFT/R/1-4/19	Straight	9/16"	17.5mm	50
*GFT/R/1-4/19L	Straight	15.24mm	23.5mm	50
GFT/R/1-4/19/45	45°	9/16"	22.5mm	25
GFT/R/1-4/19/90	90°	9/16"	22mm	25

FOOT OPERATED GREASE PUMP

- High Pressure Portable Grease Pump for quick effortless greasing in everyday lubrication such as greasing of excavators & other earth moving equipment, agricultural equipment, automotive etc.
- Hands free operation; pump operates using the Foot Lever, which greatly reduces effort & allows high pressure greasing with highest comfort
- Can be operated by hand when under low machinery
- Economical, pump is operated by a single person & uses low cost bulk grease
- Designed with all moving parts submerged in the same grease which needs to be pumped, thereby staying lubricated at all times
- Moving parts create wave action in grease, auto removing air pockets & eliminating the use of a Follower plate
- Pump delivers over 2 gms of grease per stroke & develops 8700 PSI (600 BAR)
- Works with NLGI 1, 2 & 3 Greases





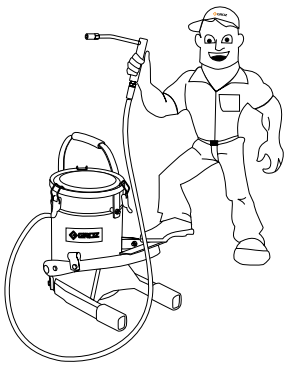



8,700 PSI
(600 BAR)

Art. Nr.	Capacity	Box Qty.
FOP/10A	10 kg	1



Upto 2 gms / stroke

PORTABLE GREASING SYSTEM

- World's Most Advanced High Pressure Grease Pump
- For use in Workshops, site applications, tractors, escavators, chain tightening etc.
- Converts from High Pressure to High Volume
- One Hand Operation
- Includes rubber lined follower plate





Common sight on construction equipment requiring high volume routine greasing



10,000 PSI
690 (BAR)



1.25 gm / stroke on High Volume Setting

Art. Nr.	Capacity	Box Qty.
GS/5	5 kg	1

GREASING EQUIPMENT

BUCKET GREASE PUMPS

series V

- High Volume High Pressure Bucket Grease Pump
- For use with agricultural, earth moving equipment & in automotive applications- especially useful in applications requiring frequent greasing
- For use with NLGI 1,2 & 3 greases
- Includes rubber lined follower plate



Upto 4,000 PSI (275 BAR)



Upto 9 gm / stroke on High Volume Setting





VGP/6 (with wheels)



VGP/10 (with wheels)




VGP/15 (with wheels)



VGP/20 (with wheels)

Variable Handle Setting

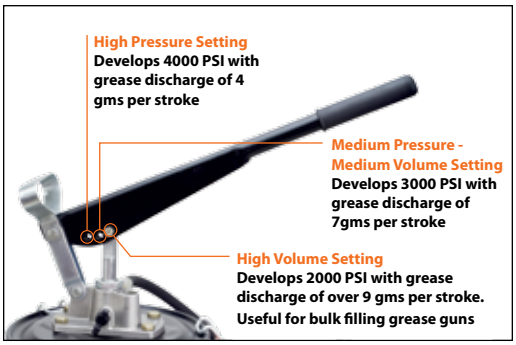

Art. Nr.	Capacity	Details	Box Qty.
VGP/6A	6 Kgs	Without wheels	1
VGP/6	6 Kgs	With wheels	1
VGP/10A	10 Kgs	Without wheels	1
VGP/10	10 Kgs	With wheels	1
VGP/15	15 Kgs	With wheels	1
VGP/20	20 Kgs	With wheels	1
◆ ZSA/HOS/VGP10A	84" Spare Hose		10
◆ FLP/195-225/3	Spare Follower Plate		1
◆ KIT/05/VGP	Repair Kit		100

Key ◆ New

AIR OPERATED GREASE RATIO PUMPS 50:1

- World-class Industrial High Pressure Grease pumps with guaranteed performance & hassle free operation
- Pump dispenses Grease at pressures upto 50 times the Air inlet pressure
- Designed to work in tough conditions - these are ideal for use in Industry, workshop, farm , construction or as part of the Mobile Grease system
- All metal construction , fully CNC machined with hardened wear resistant moving parts
- Reciprocating piston operated 63 mm dia. Air Motor
- Fitted with strainer at suction tube inlet for clean grease to the bearing
- Supplied complete with Drum Cover, rubber lined follower plate, 7' (84") of high pressure grease hose, Z swivel & professional grease control valve
- Portable version available with built-in steel drum, complete with wheels & pull handle

RECOMMENDED USE:
With light and self collapsing grease up to NLGI No. 2


Working Pressure	2 – 10 BAR (30 to 150 PSI)
Maximum Air Pressure	10 BAR (150 PSI)
Maximum Outlet Pressure	500 BAR (7500 PSI)
Air Inlet Connection	¼" BSP (F)
Pump Outlet Connection	¼" BSP (F)
Air Consumption	230 lt / min
Grease Output (NLGI No. 2 Grease)	Upto 1.10 kg / min
Noise Level	81 db



7,500 PSI (500 BAR)

WARNING

Pump must be supplied with clean & dry compressed air via an FRL unit

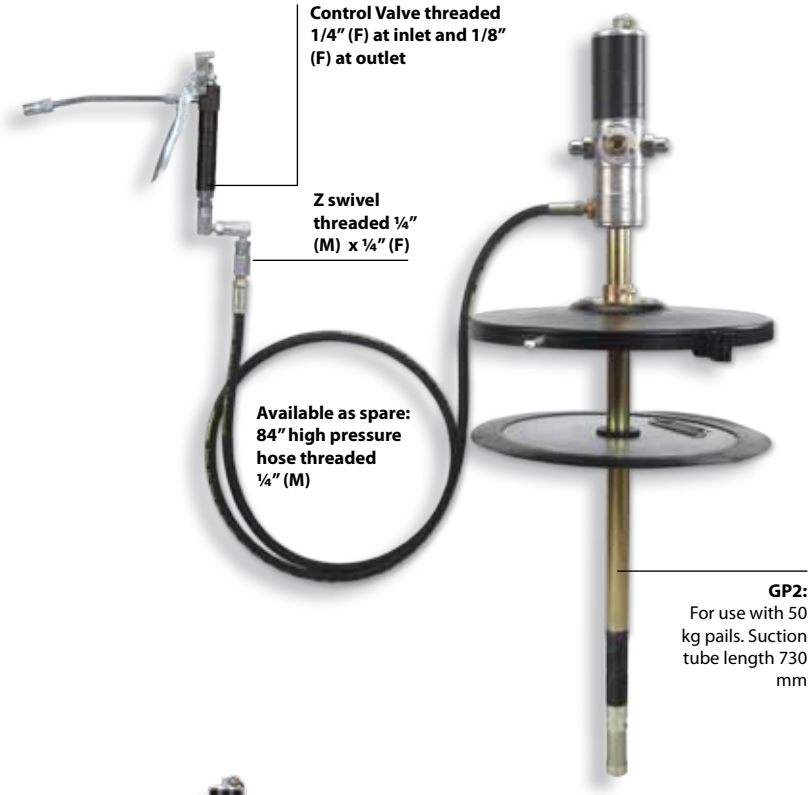



BGRP/50
Portable Grease Pump with built in 50 kg Grease Bucket



BGRP/30
Portable Grease Pump with built in 30 kg Grease Bucket

	Art. Nr.	Bucket Capacity	Box Qty.
◆	BGRP/15	15 kg	1
	BGRP/30	30 kg	1
	BGRP/50	50 kg	1
◆	FLP/550-612/6/GP3	Spare Follower Plate	1
◆	KIT/TP/RP-G		1
◆	KIT/BTM/RP-G		1

Key ◆ New

Art. Nr.	Fits	Drum Cover Diameter	Follower Plate Dimensions			Box Qty
			O.D. Steel end	O.D. Plate	I.D. Grommet	
GP1/ST/501/BSP	20-30 kg pails	310 mm	241 mm	288 mm	29.5 mm	1
GP2/ST/501/BSP	50-60 kg pails	381 mm	322 mm	380 mm	29.5 mm	1
GP3/ST/501/BSP	180 kg drums	612 mm	550 mm	602 mm	29.5 mm	1

GREASING EQUIPMENT

MAXILUBE® AIR OPERATED 50:1 GREASE PUMP

- Highly Reliable Air Operated 50:1 pump for dispensing Grease at 50 times the pressure as the Air Inlet
- Award Wining Pump design with a non corroding air motor that requires no Lubricator in the Air line
- Ideal for use in Automotive workshops for use with light & self collapsing grease upto NLGI no. 2
- Built – in Pressure Relief valve prevents both the pump & system against damage created by excessive pressure due to thermal expansion
- Supplied complete with Drum Cover, Rubber Lining Follower Plate, 84" High Pressure Rubber Hose & Booster Grease Control Valve fitted with Z Swivel, Steel Extension & coupler

Working Pressure	4–10 BAR (60 to 150 PSI)
Maximum Air Pressure	10 BAR (150 PSI)
Maximum Outlet Pressure	500 BAR (7500 PSI)
Air Inlet Connection	¼" NPT (F)
Pump Outlet Connection	¼" NPT (F)
Air Consumption	270 lt / min
Grease Output (NLGI No. 2 Grease)	0.460 kg / min
Noise Level	85 db





7,500 PSI (500 BAR)

Art. Nr.	Description	Fits	Drum Cover Diameter	Follower Plate Outer Diameter	Box Qty.
P8-G	Maxilube	180 kg Drum	24 ½"	602 mm	1

Founded in 1948 in Australia, Macnaught has been a pioneer in product design and manufacturing of fluid handling equipment. The wide range of products manufactured by Macnaught includes hand and air operated grease guns and pumps, hand and air operated oil pumps, oil and grease control guns, oil and fuel meters, heavy duty hose reels and an extensive range of accessories to suit these items.

Macnaught range of high end products are available to you exclusively via Groz. Contact your nearest Groz dealer / distributor for further details.

PORTABLE GREASING SYSTEM


- Designed to cater to daily bulk greasing needs at workshops requiring movable systems
- Includes :
  1. Maxilube® Air Operated 50:1 pump suitable for 180 kg drums
  2. Pump complete with drum cover, follower plate, 84" high pressure grease hose
  3. Booster Grease Control Valve
  4. Retracta Grease Hose Reel
  5. Drum Trolley for 180 kg drums



Art. Nr.	Box Qty.
GS100-G	1

GREASE CONTROL VALVE – METERED

- Premium quality Grease Control valve, for use with air operated grease pumps
- Built-In High Accuracy Digital Grease Meter for dispensing exact amount of grease
- Ability to measure amount of grease dispensed prevents both over & under lubrication & is invaluable in saving bearing failures
- Provides continuous grease flow, with trigger fully pressed
- Steel construction, provides durability & longevity. Meter uses oval gear technology
- Ergonomically designed pistol handle
- Comes complete with 6" steel extension, heavy duty coupler & 360° Z Swivel

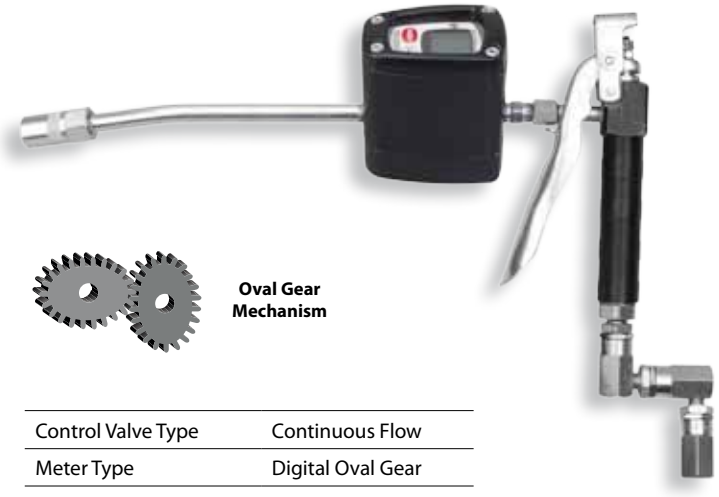

Oval Gear Mechanism

Control Valve Type	Continuous Flow
Meter Type	Digital Oval Gear
Grease Flow	0.1 to 2.5 kg / minute
Max. Working Pressure	8000 PSI (550 BAR)
Unit of Measurement	Kg
Accuracy	+/- 3%
Resettable Batch Total	9,999 gms
Cumulative Total	99999.9 kg
Battery Type	1.5 V (Two numbers)



Maximum Pressure 8,000 PSI (550 (BAR)



DGM/1/B Grease Meter available as spare for in-line applications

WARNING

Skin Injection Hazard. Keep away from nozzle


CAUTION
The gun is continuous action. Be careful not to over lubricate.

Art. Nr.	Description	Thread Specification	Box Qty.
APG/04/Z/1-4F/GM/B	Meter Fitted to a Grease Control Valve	Inlet: 1/4" BSPT (F)	1
DGM/2/N	In-Line Grease Meter	Inlet/Outlet: 1/8" BSPT	1

GREASE CONTROL VALVE- PROFESSIONAL

NEW!

- Grease Control Valve for use with Air Operated Grease Pumps

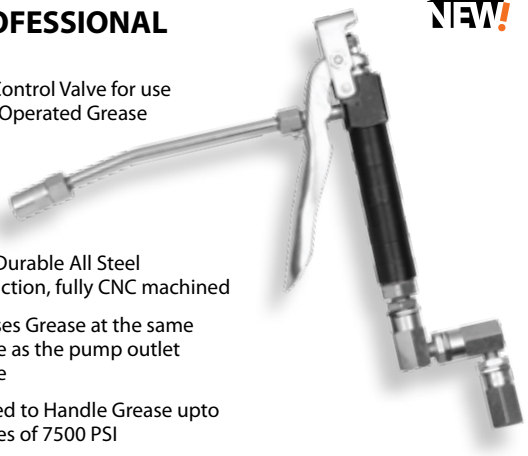

- Highly Durable All Steel Construction, fully CNC machined
- Dispenses Grease at the same pressure as the pump outlet pressure
- Designed to Handle Grease upto pressures of 7500 PSI
- Valve inlet fitted with 360° Z Swivel which permits easy handling of the valve and prevents damage to hose caused by twisting
- Comes complete with 6" Steel Extn. & Heavy Duty Coupler




Maximum Pressure 7,500 PSI (517 BAR)

Art. Nr.	Inlet Threads	Box Qty.
APG/HD/04/Z/1-4F/B	¼" BSPT (F)	1

GREASE CONTROL VALVE – BOOSTER

- Grease Control Valve for use with Air Operated Grease Pumps

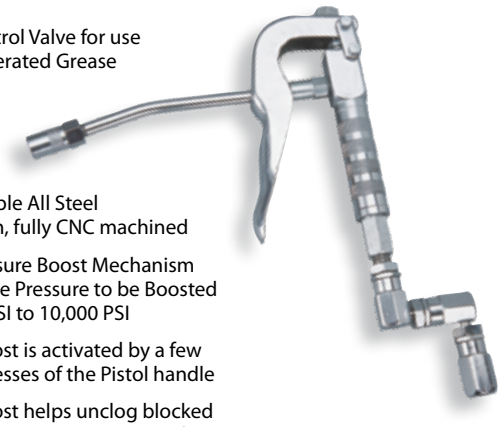

- Highly Durable All Steel Construction, fully CNC machined
- Built-In Pressure Boost Mechanism allows Grease Pressure to be Boosted from 6000 PSI to 10,000 PSI
- Pressure Boost is activated by a few repeated presses of the Pistol handle
- Pressure Boost helps unclog blocked grease fittings & grease joints with high back pressure
- Valve inlet fitted with 360° Z Swivel which permits easy handling of the valve and prevents damage to hose caused by twisting
- Comes complete with 6" Steel Extn. & Heavy Duty Coupler



Maximum Pressure 10,000 PSI (690 BAR)

Art. Nr.	Inlet Threads	Box Qty.
APG/Z/1-4F/B	1/4" BSPT (F)	1

OILING EQUIPMENT

EZEE FLO PUMP

- Versatile pump for trouble-free use on 50 litre plastic packs
- Steel pump assembly, plastic pump head & lift handle
- Includes 4' soft PVC discharge hose & curved steel spout



The Reike adaptor screws onto the plastic pull-out Rieke spout



DELIVERS

1 litre / 15 strokes

Art. Nr.	DrumCapacity	Box Qty.
EZF/8	50 litres	10

LEVER ACTION BARREL PUMP - HEAVY DUTY

- Aluminium Die cast pump head with steel body
- 3/4" pump inlet
- Includes telescopic suction tube
- Suitable for 50-210 litre drums
- Used for transferring oil based fluids, heating oils, motor oils, heavy & light oils, kerosene & diesel



DELIVERS

300 ml / stroke

Art. Nr.	Box Qty.
LBP/04/PT	10

V SERIES BUCKET OIL PUMPS

- Steel pump complete with steel bucket, drum cover, lift handle and 4' soft PVC discharge hose
- Variable handle setting for use with oils of different viscosities
- Useful for convenient movement & transfer of oils in shop floors & workshops

series



DELIVERS


upto 125 ml / stroke

Art. Nr.	Drum Capacity	Box Qty.
V12	12 litres	1
V16	16 litres	1

ROTARY BARREL PUMP

- Solid cast iron construction
- 2 way operation
- 3 piece threaded steel suction tube with filter
- 1" pump inlet
- Suitable for 50-210 litre drums
- Useful for transferring oil, diesel, kerosene & other non-corrosive media

series

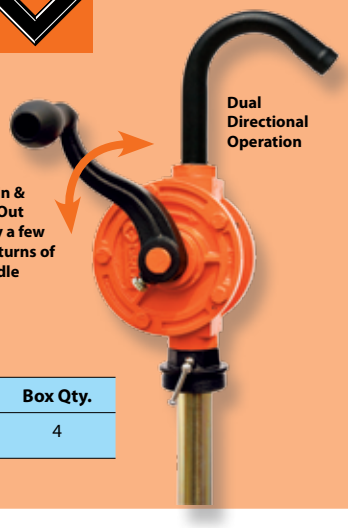

DELIVERS

5 litres / 20 turns

Art. Nr.	Box Qty.
V25/3R/SPL/F	4

OIL CANS

- Tin coated steel body in premium powder coated finish
- Steel pump with double ball check
- Useful for convenient dispensing of oil
- Comes complete with 150mm (6") rigid steel spout



Art. Nr.	Capacity	Box Qty.
◆ V200R	200 ml	72
V300R	300ml	72
V500R	500ml	72

Key

◆ New

PLASTIC MEASURES

- Translucent Polyethylene construction with marking in litres on one side
- Complete with flexible spout and cap & lid for the container
- Used for transferring measured quantities of fluids
- Not to be used for measuring Media for Sale



Art. Nr.	Capacity	Box Qty.
MSR/P/F-1	1 litre	40
MSR/P/F-2	2 litre	25
MSR/P/F-3	3 litre	20
MSR/P/F-5	5 litre	15

PLASTIC FUNNELS

- Anti-splash & spill-proof Funnels
- Polypropylene body with built-in contours for convenient handling
- Funnel rim is curved inward
- Complete with wire mesh screen, dust cover & flexible spout
- 2" Bung on FNL/9B allows it to be used directly on drums



2" Bung on FNL/9B allows direct attachment on drum



Art. Nr.	Capacity	Box Qty.
FNL/8	1.7 litres	15
FNL/9B	3 litres	15

GROZ


why us?
we offer training, merchandising & comprehensive sales support

why us?
we give you customized solutions for your specific requirements

why us?
because excellence is our minimum standard

why us?
our tools are used worldwide for a large variety of applications

OILING EQUIPMENT

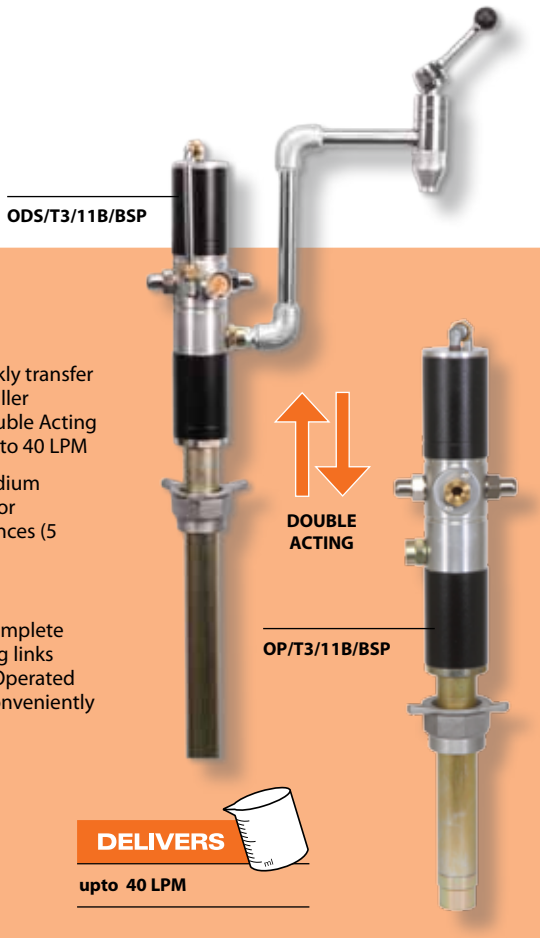

ODS/T3/11B/BSP

DOUBLE ACTING

OP/T3/11B/BSP

AIR OPERATED OIL RATIO PUMPS

- World-class Industrial Oil Dispensing pumps with guaranteed performance & hassle free operation
- Pumps are designed to work in tough conditions & are ideal for use in Industry, workshop, farm , construction or as part of the Mobile Oil system
- All metal construction, fully CNC machined with hardened wear resistant moving parts
- Reciprocating piston operated 63 mm dia. Air Motor
- Pumps have a built in Strainer at inlet to keep contaminants away

WARNING

Pump must be supplied with clean & dry compressed air via an FRL unit

Working Pressure	2 – 10 BAR (30 to 150 PSI)
Air Inlet Connection	¼" BSP (F)
Pump Outlet Connection	½" BSP (F)
Noise Level	81 db
For use with	210 Litre Drums

VARIANTS - 1:1 PUMPS

- Transfer pump, used to quickly transfer oils from large drums to smaller containers. These have a Double Acting operation with discharge upto 40 LPM
- Ideal for use with low to medium viscosity (upto SAE 80 Oils) for transferring over short distances (5 metres)
- Air Consumption: 270 LPM
- 1:1 pump is also available complete with Oil bar tap & connecting links (ODS series), used as an Air Operated Oil Dispenser to quickly & conveniently dispense Oils from Drums



Max Outlet Pressure 150 PSI (10 BAR)

DELIVERS

upto 40 LPM

Art. Nr.	Description	Box Qty.
OP/T3/11B/BSP	1:1 Pump Only for 210 Litre Drums	1
OPK/T3/11B/BSP	1:1 Pump for 210 Litre Drums complete with 1.5 m Hydraulic Hose & Oil Control Gun (OGY)	1

AIR OPERATED STAINLESS STEEL 3:1 PUMP

- 3:1 Air Operated pump, corrosion protected for use with water based fluids, such as Detergents, Windshield Fluids, Water etc.
- Wetted components are made out of Stainless Steel
- Pump is designed to work in corrosive environments, ideal for use in Car Washers, Garages, Workshops, Lube Trucks, Industry etc.
- Reciprocating piston operated 63 mm dia. Air Motor
- Pumps have a built in Stainless Steel Strainer at inlet to keep contaminants away

Working Pressure	2 – 10 BAR (30 to 150 PSI)
Discharge	Upto 14 LPM
Air Consumption	230 LPM
Air Inlet Connection	¼" BSP (F)
Pump Outlet Connection	½" BSP (F)
Noise Level	81 db
For use with	210 Litre Drums

DELIVERS

upto 14 LPM

Art. Nr.	Description	Box Qty.
OP/T3/SS/BSP	3:1 Pump Only for 210 Litre Drums	1

WARNING


Pump must be supplied with clean & dry compressed air via an FRL unit



Stainless Steel Suction Tube

VARIANTS - 3:1 PUMPS

- Amongst the most popular general purpose air operated pumps
- Pumps are single acting with discharge upto 14 LPM
- Ideal for use with medium to high viscosity oils (upto SAE 130) for transferring over short distances (upto 30 metres), mostly used with Trolley mounted kits
- Air Consumption: 230 LPM

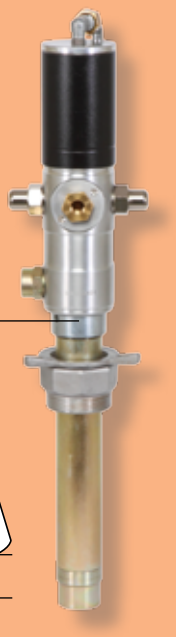

OP/T3/31B/BSP



Max Outlet Pressure 450 PSI (30 BAR)

DELIVERS

upto 14 LPM

Art. Nr.	Description	Box Qty.
OP/T3/31B/BSP	3:1 Pump Only for 210 Litre Drums	1
OPK/T3/31B/BSP	3:1 Pump for 210 Litre Drums complete with 1.5 m Hydraulic Hose & Oil Control Gun (OGY)	1

VARIANTS - 5:1 PUMPS

- High Pressure air operated pumps for dispensing oil at 5 times the pressure as the air inlet
- Pumps are double acting with discharge upto 18 LPM
- Ideal for use with high viscosity oils (upto SAE 240) for transferring over short & long distances (upto 50 metres), mostly used with Trolley mounted kits both with & without Hose Reels, as well as with fixed systems for centralized distribution
- Air Consumption: 250 LPM

DOUBLE ACTING



OP/T3/51B/BSP



Max Outlet Pressure 750 PSI (50 BAR)

DELIVERS

upto 18 LPM

Art. Nr.	Description	Box Qty.
OP/T3/51B/BSP	5:1 Pump Only for 210 Litre Drums	1
OPK/T3/51B/BSP	5:1 Pump for 210 Litre Drums complete with 1.5 m Hydraulic Hose & Oil Control Gun (OGY)	1

OILMASTER AIR OPERATED 5:1 OIL PUMP

macnaught

- Highly Reliable Air Operated 5:1 pump for dispensing Oils at 5 times the pressure as the Air Inlet
- Ideal for indoor applications in automotive workshops for pumping Oils (upto SAE 140). Dispenses Oils over distances upto 50 m, mostly used with trolley mounted kits both with & without hose reels
- **Unique Pump design with non corroding air motor, requires no Lubricator in the air line**
- Built- in Pressure Relief valve prevents both the pump & system against damage created by excessive pressure due to thermal expansion
- Reciprocating piston operated 72mm dia. Air Motor
- Stub Pump supplied complete with 2" bung; pump can be wall mounted, mounted on a tank, drum etc.
- Also included separate suction tube for installing pump on 210 Litre Drums

Working Pressure	4 – 10 BAR (60 to 150 PSI)
Air Inlet Connection	¼" NPT (F)
Pump Outlet Connection	½" NPT (F)
Pump Inlet for connecting Suction Tube	1" NPT (F) & 1" UNEF (F)
Noise Level	85 db
For use with	Drums, Tanks, Wall Mount etc.

DELIVERS

upto 15 LPM

Art. Nr.	Box Qty.
T512-G	1

DOUBLE ACTING



OILING EQUIPMENT

r-SERIES™ INDUSTRIAL AIR OPERATED 3:1 OIL PUMP

macnaught

- Heavy Duty Industrial 3:1 ratio pump for dispensing Oils at 3 times the pressure as the Air Inlet
- Solid all Metal Die cast Aluminium Construction
- Ideal for single dispensing or through multiple hose reels & metered gun systems
- Pumps Oils upto SAE 140 over distances upto 30 m
- Reciprocating piston operated 54mm dia. Air Motor
- Stub Pump supplied complete with 2" bung, pump can be wall mounted, mounted on a tank, drum etc.
- Also included separate suction tube for installing pump on a 210 Litre Drums
- **Air Line Lubricator included as standard accessory**



Working Pressure	4 – 10 BAR (60 to 150 PSI)
Air Inlet Connection	¼" NPT (F)
Pump Outlet Connection	3/4" NPT (F)
Pump Inlet for connecting Suction Tube	3/4" NPT (F)
For use with	Drums, Tanks, Wall Mount etc.

Art. Nr.	Box Qty.
R300S-G	1



DELIVERS

upto 23 LPM

r-SERIES™ INDUSTRIAL AIR OPERATED 5:1 OIL PUMP

macnaught

- Heavy Duty Industrial 5:1 ratio pump for dispensing Oils at 5 times the pressure as the Air Inlet
- Solid all Metal Die cast Aluminum Construction
- Ideal for dispensing oils through multiple hose reels & metered gun systems found in large workshops utilizing bulk tanks
- Pumps Oils upto SAE 140 over distances upto 50 m
- Reciprocating piston operated 104mm dia. Air Motor
- Stub Pump supplied complete with 2" bung, pump can be wall mounted, mounted on a tank, drum etc.
- Also included separate suction tube for installing pump on 210 Litre Drums
- **Air Line Lubricator included as standard accessory**



Working Pressure	4 – 10 BAR (60 to 150 PSI)
Air Inlet Connection	¼" NPT (F)
Pump Outlet Connection	3/4" NPT (F)
Pump Inlet for connecting Suction Tube	1" NPT (F) & 1" UNEF(F)
For use with	Drums, Tanks, Wall Mount etc.

Art. Nr.	Box Qty.
R500S-G	1



DELIVERS

upto 28 LPM

PORTABLE OIL SYSTEM

macnaught


- Ideal choice for workplace requiring movable oil dispensing systems
- Includes Oilmaster Air Operated 5:1 pump, retracta Oil Hose Reel (OMP2101), Oil Control Gun with Mechanical Meter (HG40), 210 Litre Drum Trolley & Hydraulic Hose to connect Pump outlet to Hose Reel Inlet
- Suitable for dispensing oils upto SAE 140 i.e Engine Oil, Hydraulic Oil etc.



Art. Nr.	Box Qty.
OS512-G	1

ELECTRIC OIL PUMPS

- Heavy Duty Oil pump designed specifically to transfer bulk oils, hydraulic fluid, Used Oil, antifreeze etc.
- Non corroding Aluminium Die cast pump body
- A high horsepower to flow ratio assures adequate power to pump viscous fluids at low temperatures
- **Sintered Powder Metal Gears**
- Self priming, positive displacement design
- Pump has an internal bypass valve to bypass flow, if the discharge pressure exceeds the bypass valve setting
- Built-In 2" Bung Adaptor for mounting on drums/ tanks
- **Air Cooled Motor with Thermal Protection**
- **Can be used to transfer used oil with a screen fitted onto the Suction Tube**
- UL listed frame & motor components

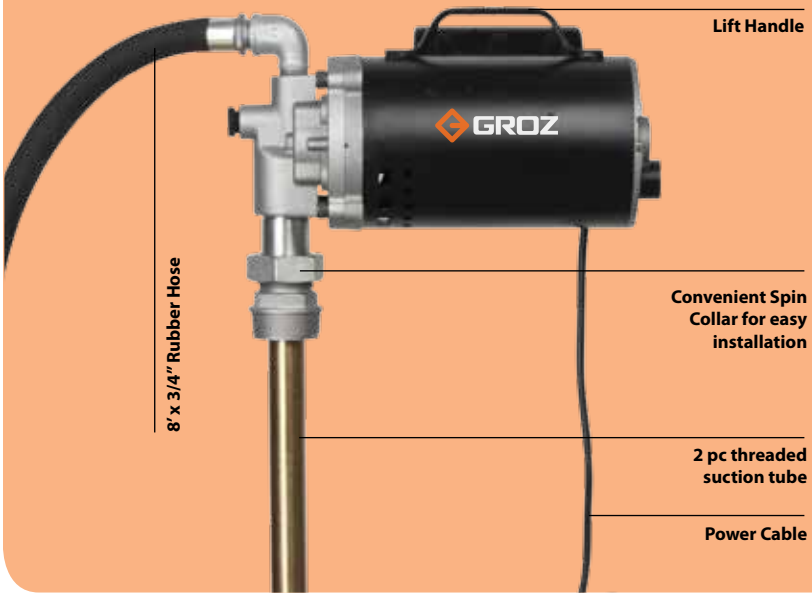

RECOMMENDED USE

Oils, Synthetic Oils, Antifreeze, Used Oil, Hydraulic Fluids, Cutting Oils, Oil based Herbicides, Non Flammable Oil Based Solvents, Liquid Soap etc.


Description	Heavy Duty 220V AC
Motor	1/2 HP 220V AC, 50/60 Hz.
Amp	6 Amp
Suction Pipe	34" long
Hose	3/4" x 8'
Inlet	1" NPT
Outlet	3/4" NPT
Dispensing Nozzle	Ball Valve
Power Cable	48" (1220 mm)
Max. Viscosity of Oil	SAE 90
Max. Working Pressure	65 PSI (4.5 BAR)

	Art. Nr.	Flow Rate	RPM	Box Qty.
	OPM/220	11.5 LPM	1720	1
◆	OPM/220/HF	25 LPM	2800	1

Key
◆ New

OIL CONTROL GUN

- For use with Air Operated Oil Pumps upto 6:1 Pressure Ratio
- Recommended Use: Oil, Gear Lube, ATF
- Gun dispenses by simple press of the trigger
- Built-in safety cum continuous Flow lever can be slid over the trigger for continuous un-attended dispensing; or alternatively under the trigger to lock & prevent accidental dispensing
- Built-in swivel threaded at inlet for easy manoeuvrability
- Standard configuration includes steel outlet extension & available as Gun Only or Gun with manual non drip nozzle
- Available with steel extension and manual non drip nozzle

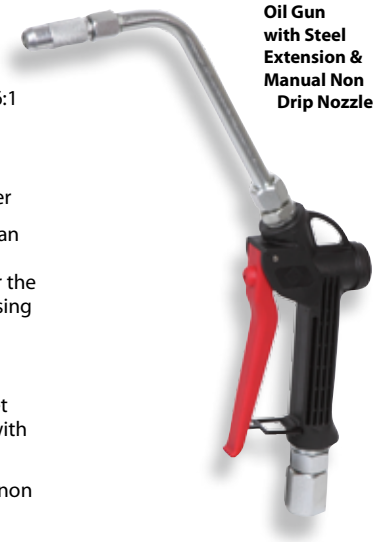
Oil Gun with Steel Extension & Manual Non Drip Nozzle

In-Line Swivel	½" BSPT(F)
Outlet Diameter of Steel Spout	½" (12.7 mm)
Inside Diameter of Hose Extension	½" (12.7 mm)
Max. Inlet Pressure	870 PSI (60 BAR)
Max. Flow rate	70 LPM
Working Temperature Range	-10°C to 60°C

Art. Nr.	Box Qty.
With Manual Non Drip Nozzle	
OGY/SM/1-2R/B	1

OILING EQUIPMENT

MECHANICAL OIL CONTROL GUN

- High accuracy light weight gun for controlling fluid deliveries in most demanding applications
- Recommended Use: Oils with viscosity upto 2000 cSt
- Oval gear mechanism for optimum accuracy
- Aluminium Die cast meter body with protective shroud
- Gun with Impact & Weather resistant nylon construction
- Built-in safety cum continuous Flow lever can be slid over the trigger for continuous un-attended dispensing; or alternatively under the trigger to lock & prevent accidental dispensing
- Built In swivel at inlet for easy manoeuvrability
- Supplied complete with rigid steel extension and manual non drip nozzle



Note: Not to be used to measure media for resale

Flow rate	1 to 30 LPM
Inlet	½" BSPT (F)
Accuracy	+ / - 1%
Repeatability	+ / - 0.20%
Max. Working Pressure	870 PSI (60 BAR)
Working Temperature range	-10°C to 60°C
Max. Resettable Batch Total	999.9 Litres
Max. Non Resettable Totalizer	9,99,999 Litres
Least Count /Resolution	0.10 Litres
Water Resistance	IP55

Art. Nr.	Box Qty.
OM/10/OGY/RM/B	1

MECHANICAL HEAVY DUTY OIL CONTROL GUN



- Heavy Duty Industrial Oil Control Gun with Robust Aluminium construction & a rubberized shroud for protecting the meter
- For use with Engine Oils, Diesel, ATF, Antifreeze, Antiboil & other petroleum based media upto SAE 140
- Oval gear mechanism for optimum accuracy
- Latching handle with built-in trigger lock for continuous dispensing
- **Gun has 2 Outlet positions - In Line & 90°**
- Built in Swivel at inlet & supplied complete with Steel Extension with Automatic non-drip Nozzle

Note: Not to be used to measure media for resale

Flow rate	1 to 30 LPM
Inlet	½" BSPT (F)
Accuracy	+ / - 1%
Repeatability	+ / - 0.20%
Max. Working Pressure	1500 PSI (100 BAR)
Working Temperature range	0°C to 50°C
Max. Resettable Batch Total	999.9 Litres
Max. Non Resettable Totalizer	9,99,999 Litres
Least Count /Resolution	0.10 Litres
Water Resistance	IP55

Art. Nr.	Box Qty.
HG40R/B	1

ELECTRONIC OIL CONTROL GUN



- High accuracy light weight gun
- Recommended Use: Oils with viscosity upto 5000 cSt
- Oval gear mechanism for optimum accuracy
- Electronic Display using two 1.5V batteries
- Aluminium Die cast meter body with protective shroud
- Gun with Impact & Weather resistant nylon construction
- Built-in safety cum continuous Flow lever can be slid over the trigger for continuous un-attended dispensing; or alternatively under the trigger to lock & prevent accidental dispensing
- Supplied with Steel extension & built In swivel at inlet for easy manoeuvrability
- Measures in Litres, Quarts, Pints & Gallons
- **Easy user re-calibration**

Note: Not to be used to measure media for resale

Flow rate	1 to 30 LPM
Inlet	½" BSPT (F)
Accuracy	+ / - 0.50%
Repeatability	+ / - 0.30%
Max. Working Pressure	870 PSI (60 BAR)
Working Temperature range	-10°C to 60°C
Max. Resettable Batch Total	99,999 units
Max. Non Resettable Totalizer	9,99,999 units
Least Count /Resolution	0.001 units
Water Resistance	IP55

Art. Nr.	Box Qty.
OM/20/OGY/RM/B	1

OIL CONTROL GUN WITH ELECTRONIC PRE SET METER



- Heavy Duty Industrial Oil Control Gun with Robust Aluminium construction & hard coat anodized body
- Electronic Preset design, works on 4 AA batteries
- Dual Mode: Manual & Pre Set (dispenses set quantity of media & stops)
- Oval Gear Mechanism for optimum accuracy
- Resettable Totalizer for Individual batch can be set in Litres, Quarts, Pints & Gallons
- A second resettable Totalizer for multiple dispense operations can be set in Litres, Quarts, Pints & Gallons with a Max. Pre Set Volume of 99.9 units
- Lifetime Non-Resettable Totalizer can be set in Litres or Gallons
- For use with Engine Oils, Diesel, ATF, Antifreeze, Antiboil & other petroleum based media upto SAE 240
- Built in Swivel at inlet & supplied complete with steel extension with built-in non drip nozzle

Note: Not to be used to measure media for resale

Flow rate	1 to 38 LPM
Inlet	½" NPT (F)
Accuracy	+ / - 0.50%
Repeatability	+ / - 0.20%
Max. Working Pressure	1000 PSI (69 BAR)
Working Temperature range	-5°C to 50°C
Max. Resettable Batch Total	99,999 units
Max. Pre-Set Volume	99.9 units
Max. Non Resettable Totalizer	99,999 units
Least Count /Resolution	0.001 units
Water Resistance	IP55

Art. Nr.	Box Qty.
HEG/EP-01	1

OILING EQUIPMENT

MECHANICAL OIL METER

- High pressure positive displacement meter suitable for in-line and end of line applications
- Oval gear mechanism for optimum accuracy
- Robust Aluminium Die Cast construction with protective shroud on meter



RECOMMENDED USE
Oils with viscosity upto 2000 cSt, Diesel, Biodiesel

Note: Not to be used to measure media for resale

Flow rate	1 to 30 LPM
Inlet / Outlet	½" BSP (F)
Accuracy	+ / - 1%
Repeatability	+ / - 0.20%
Max. Working Pressure	1000 PSI (70 BAR)
Burst Pressure	3000 PSI (210 BAR)
Pressure Loss	10 PSI (0.7 BAR)
Working Temperature range	-10°C to 60°C
Max. Resettable Batch Total	999.9 Litres
Max. Non Resettable Totalizer	9,99,999 Litres
Least Count /Resolution	0.10 Litres
Water Resistance	IP55

Art. Nr.	Box Qty.
OM/10/1-2/BSP	1



Oval Gear Mechanism

ELECTRONIC OIL METER

- High pressure positive displacement meter suitable for in-line and end of line applications
- Oval gear mechanism for optimum accuracy
- Electronic Display using two 1.5V batteries
- Robust Aluminum Die Cast construction with protective shroud
- **Measures in Litres, Quarts, Pints & Gallons**
- **Easy user re-calibration**



RECOMMENDED USE:
Oils with viscosity upto 5000 cSt, Diesel, Biodiesel

Note: Not to be used to measure media for resale

Flow rate	1 to 30 LPM
Inlet / Outlet	½" BSP (F)
Accuracy	+ / - 0.50%
Repeatability	+ / - 0.30%
Max. Working Pressure	1000 PSI (70 BAR)
Burst Pressure	2000 PSI (140 BAR)
Pressure Loss	10 PSI (0.7 BAR)
Working Temperature range	-10°C to 60°C
Max. Resettable Batch Total	99,999 units
Max. Non Resettable Totalizer	9,99,999 units
Least Count /Resolution	0.001 units
Water Resistance	IP55

Art. Nr.	Box Qty.
OM/20/1-2/BSP	1



Oval Gear Mechanism

Got a question?

Call us now for all the answers!

+91.124.282.7734

WASTE OIL HANDLING

AIR OPERATED DOUBLE DIAPHRAGM PUMPS

- Designed for use in applications requiring large volume transfer in a very short time
- Pumps can transfer contaminated media & are good at cleaning out pits or liquids that can be a mix of several products like oil, water etc. all mixed together
- These pumps transfer waste oil, pump out sumps and or low areas due to rain, clean out tanks, move yeast slurry, transfer sewage etc.
- AODD/3-8/N is highly compact, small enough to fit in hand, yet capable of pumping up to 26 LPM. This pump can be mounted upright, sideways upside down & finds great application in car washers
- Air Inlet Pressure : 100 PSI



AODD/1-2/N

	AODD/3-8/N	AODD/1-2/N	AODD/0-1/N
Construction	Polypropylene	Polypropylene	Polypropylene & Aluminium
Pump Inlet/ Outlet	3/8" NPT (F)	1/2" NPT (F)	1" NPT (F)
Air Inlet	1/4" NPT (F)	3/8" NPT (F)	3/8" NPT (F)
Air Exhaust	1/4" NPT (F)	3/8" NPT (F)	1/2" NPT (F)
Flow rate	0 to 26 LPM	0 to 53 LPM	0 to 140 LPM
Diaphragm material	Santoprene	BUNA N	BUNA N
Valve material	Kynar	Acetal	Acetal
Max. Particle Size	2.50 mm	1.60 mm	3.00 mm
Suction Lift (Dry)	11'	15'	15'
Suction Lift (Wet)		25'	25'
Air Consumption at 100 PSI	16 CFM	40 CFM*	6.5 CFM

***at 80 PSI**



AODD/0-1/N



AODD/3-8/N

Art. Nr.	Box Qty.
◆ AODD/3-8/N	1
AODD/1-2/N	1
AODD/0-1/N	1

Key
◆ New

what is trust?

accuracy + precision + durablity + reliability + support + sevice with a smile

WASTE OIL HANDLING


WASTE OIL DRAIN

- Oil Drain with wheel mounted tank for gravity draining of motor, engine, gearbox & differential oils, transmission & power steering fluids etc. from all types of motor vehicles placed on auto lift or a pit
- Centrally Mounted 10 Litres capacity bowl is height adjustable & can be optimally positioned allowing oil draining as well as other maintenance operations
- Durable all-steel design and re-inforced castors; the unit provides a safe & affordable option for draining, transferring & evacuating used oil
- Designed for excellent mobility, easy bowl positioning & simple to use pressurized evacuation
- Comes complete with a 14" dia. telescopic bowl that can be adjusted from 45" to 72" high
- 68 Litre tank includes a preset air regulator that allows the use of standard compressed air upto 150 PSI
- Tank includes a safety valve and a reinforced dispensing hose that doubles as a sight gauge to prevent overfilling
- Not for use with fuels and corrosive media

Tank Capacity	68 Litre
Max. Collection capacity	55 Litre
Bowl Capacity	10 Litres
Bowl inner Diameter	14"
Length of draining Hose	2 meter
Maximum Height	72"
Minimum Height	45"
Recommended Draining Pressure	8 PSI (0.5 BAR)



Used Oil being drained from vehicle in an automotive workshop

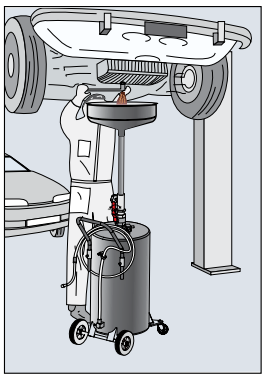

Art. Nr.	Box Qty.
WOD/68	1

WASTE OIL DRAIN - GRAVITY FEED

NEW!

- Oil Drain with wheel mounted tank for gravity draining of motor, engine, gearbox & differential oils, transmission & power steering fluids etc. from all types of motor vehicles placed on auto lift or a pit
- Centrally Mounted 10 Litres (10.50 qt.) capacity bowl is height adjustable & can be optimally positioned allowing oil draining as well as other maintenance operations
- Bowl comes fitted with Anti Splash Screen
- Durable all-steel design and re-enforced castors; the unit provides a safe & affordable option for draining, transferring & evacuating used oil
- Designed for excellent mobility, easy bowl positioning & simple to use gravity evacuation
- Comes complete with a 14" (355mm) telescopic bowl with height adjustment option
- Tank comes fitted with Sight Gauge to check waste oil level & a Faucet to drain out oil
- Not for use with fuels and corrosive media

	WOD-30G	WOD-50G
Tank Capacity	30 Litres (8 gallons)	50 Litres (13 gallons)
Bowl Capacity	10 Litres / 10.5 Quarts	10 Litres / 10.5 Quarts
Bowl Inner Diameter	14" (355 mm)	14" (355 mm)
Max. Height	55" (1400 mm)	63-1/2" (1613 mm)
Min. Height	40" (1016mm)	40" (1016 mm)





Bowl fitted with Anti-Splash Screen


Art. Nr.	Box Qty.
WOD/30G	1
WOD/50G	1

HEAVY DUTY ELECTRIC FUEL PUMPS

NEW!

- Heavy Duty Industrial Greade Fuel Pumps designed for every day use in Agriculture, Construction, Automotive & Industrial applications
- Rain & weather proof for tough outdoor use
- Lightweight, yet strong non corroding Aluminum Die Cast Construction
- Geared Pump design using precision sintered metal gears
- Geared Construction makes the pump tolerant to contaminants in fuel, in addition to offering tremendous suction & minimal noise
- cUL, ATEX & IECEx listed Motor
- Duty Cycle: 30 minutes on / 30 minutes off
- Select models available wiht meter & filter also

RECOMMENDED USE: Gasoline, Diesel, E-15 Fuel, Kerosene, Bio Diesel (B20)

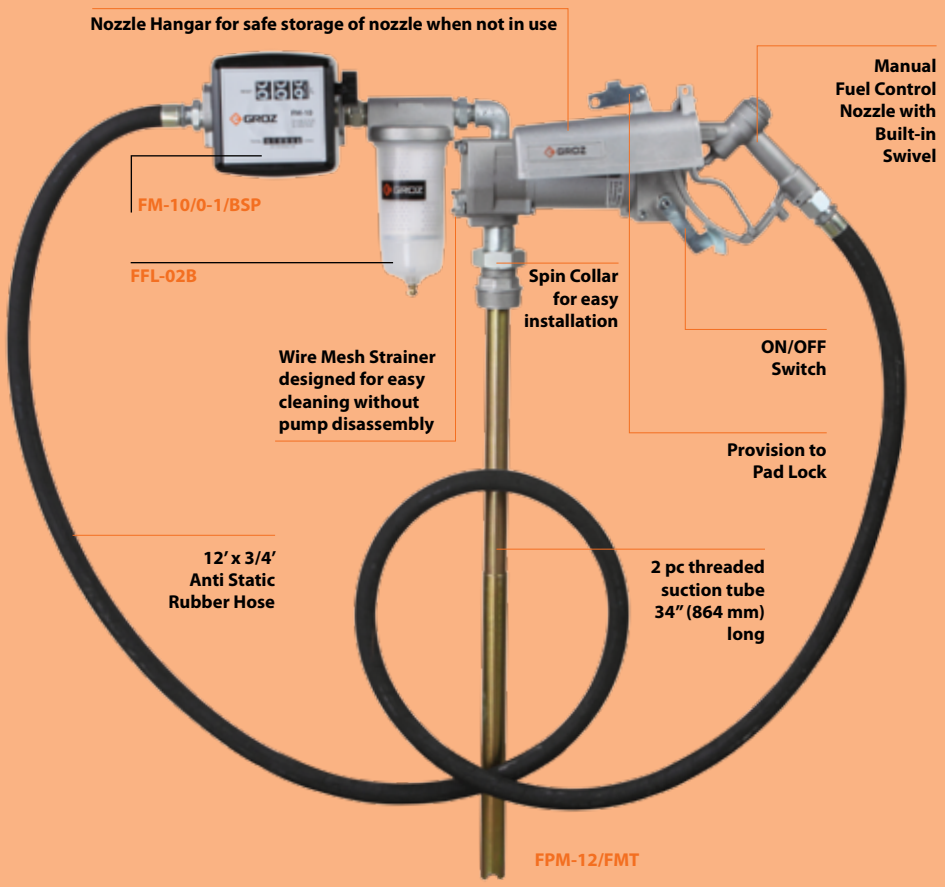

FLOW RATE

Upto 57 LPM*

*Measured at pump outlet with Vehicle Engine switched on

Art. Nr.	Description	Box Qty.
FPM-12	Pump Assembly	1
FPM-12/MT	Pump Assembly with Digital Meter FM-10/0-1/BSP (pg. 34)	1
FPM-12/FMT	Pump Assembly with Digital Meter (FM-10/0-1/BSP) & Filter FFL-02B (pg. 38)	1
FPM-24	Pump Assembly	1
FPM-220	Pump Assembly	1

	FPM-12	FPM-24	FPM-220
Description	Heavy Duty 12V DC	Heavy Duty 24V DC	Heavy Duty 220V AC
Flow Rate (at pump outlet)	Upto 57 LPM*	Upto 57 LPM*	Upto 49 LPM*
Explosion Proof Motor	1/7 HP 12V DC	1/7 HP 24V DC	1/8 HP 230V AC , 50/60 Hz.
Amp	12 Amp	6 Amp	1 Amp
Internal bypass valve	Yes	Yes	Yes
Suction Pipe	Steel	Steel	Steel
Hose	3/4" x 12' Anti Static Hose	3/4" x 12' Anti Static Hose	3/4" x 12' Anti Static Hose
Tank Adapter	2" Threaded	2" Threaded	2" Threaded
Inlet	1" NPT	1" NPT	1" NPT
Outlet	3/4" NPT	3/4" NPT	3/4" NPT
Dispensing Nozzle	3/4" Manual with Swivel	3/4" Manual with Swivel	3/4" Manual with Swivel
Battery Cable (2 Wire)	15'	15'	NA

HEAVY DUTY HIGH FLOW ELECTRIC FUEL PUMPS

NEW!


- Heavy Duty Industrial Grade High Flow Fuel pump designed for heavy duty usage in Agricultural, Construction, Automotive & Industrial applications
- Rain & Weather proof for tough outdoor use
- Lightweight yet strong, non corroding Aluminum Die cast construction
- Geared pump design using precision sintered metal gears
- Geared construction makes the pump tolerant to contaminants in fuel; in addition to offering tremendous suction & minimal noise
- cUL, ATEX & IECEx listed Motor
- Duty Cycle: 30 Minutes On / 30 Minutes Off

RECOMMENDED USE
Gasoline, Diesel, E15 Fuel, Kerosene, Bio Diesel (B20)

FLOW RATE

Upto 75 LPM*

*Measured at pump outlet with Vehicle Engine switched on

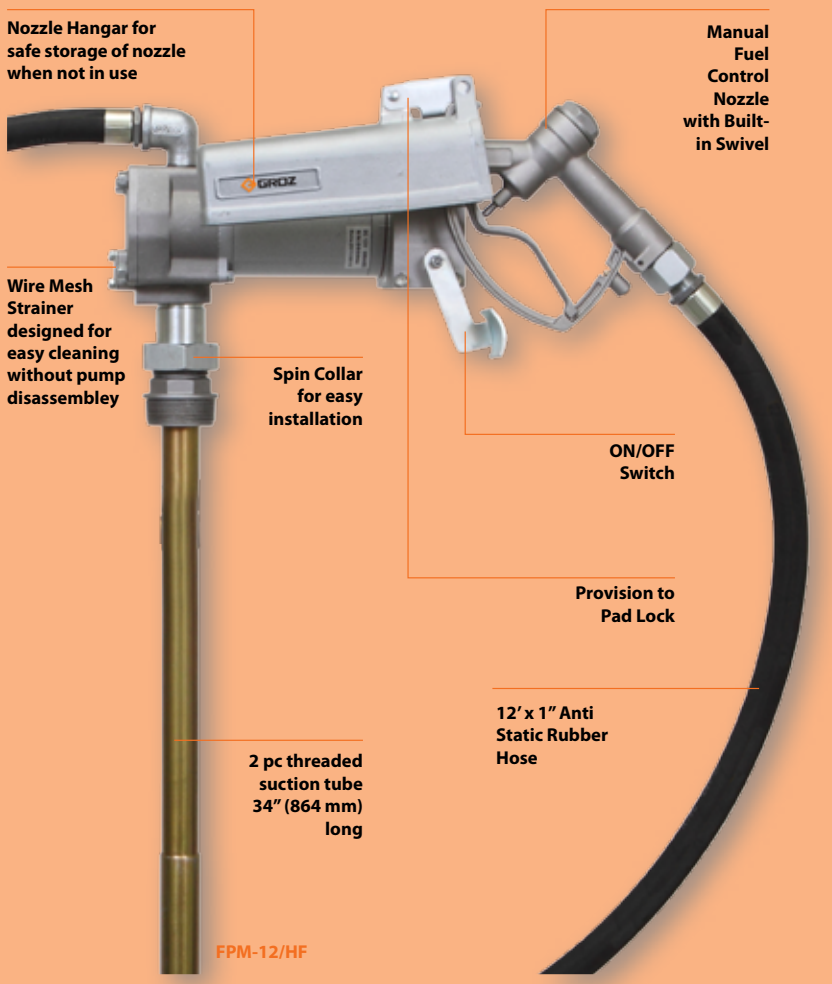

Art. Nr.	Description	Box Qty.
FPM-12/HF	Pump Assembly	1
FPM-12/HF/MT	Pump Assembly with Digital Meter FM-10/0-1/BSP (pg. 34)	1
FPM-12/HF/FMT	Pump Assembly with Digital Meter (FM-10/0-1/BSP) & Filter FFL-02B (pg. 38)	1

Description	Heavy Duty 12V DC
Flow Rate*	Upto 20 GPM (75 LPM)
Explosion Proof Motor	1/7 HP 12V DC
Amp draw from Battery	15 Amp
Internal bypass valve	Yes
Suction Pipe	Steel
Hose	1" x 12' Anti Static Hose
Tank Adapter	2" Threaded
Inlet	1" NPT
Outlet	1" NPT
Dispensing Nozzle	1" Manual with Swivel
Battery Cable (2 Wire)	15'


ELECTRIC FUEL & OIL PUMPS

- Vertical mount Fuel & Oil pump designed for use in light Industrial, Automotive, Heating & Marine applications
- **For use with non flammable media**
- Pumps have built in Bung Adapter to fit directly onto drums with a 2" threaded opening
- Manufactured from chemically inert materials; these pumps work with a wide variety of low viscosity media. Pump motor has double insulation which makes them safe for use with water & emulsions
- Built-In Anti Siphoning system ensures that media does not flow out by Siphon action incase of accidental damage to the delivery hose or dispensing nozzle
- Duty Cycle: Continuous Duty
- **RECOMMENDED USE:** Diesel, Kerosene, Mineral & Synthetic Oils, Heating Oils, Antifreeze, Water, Emulsions etc.



Art. Nr.	EOP/DC/12	EOP/DC/24	EOP/AC/230
Description	12V DC	24V DC	230V AC
Flow rate*	Upto 35 LPM	Upto 35 LPM	Upto 40 LPM
Motor	0.43 HP Centrifugal Motor	0.43 HP Centrifugal Motor	0.43 HP Centrifugal Motor
Amp draw from battery	9.2 Amp	5.6 Amp	1 Amp
Absorbed Power	110W	135W	224W
Discharge Head	1 meter	1 meter	1 meter
Suction Pipe	3/4" ID x 1m long	3/4" ID x 1m long	3/4" ID x 1m long
Delivery Hose	3/4" ID x 3m long	3/4" ID x 3m long	3/4" ID x 3m long
Tank Adaptor	2" & M64x4	2" & M64x4	2" & M64x4
Inlet / Outlet	3/4" Hose Barb	3/4" Hose Barb	3/4" Hose Barb
Dispensing Nozzle	Manual Polypropylene Nozzle with 3/4" Hose Barb	Manual Polypropylene Nozzle with 3/4" Hose Barb	Manual Polypropylene Nozzle with 3/4" Hose Barb
Battery / Power cable	3m long with battery clamps	3m long with battery clamps	2m long with plug
Water / Dust Protection	IPX-4 (protection against splashing water)	IPX-4 (protection against splashing water)	IPX-4 (protection against splashing water)
Noise Level	70 db	70 db	70 db
Working Temperature range	-10°C to +40°C	-10°C to +40°C	-10°C to +40°C
CE	Yes	Yes	Yes
Use with Petrol & other Flammable Fuels	No	No	No

*** measured at pump outlet tested using Diesel at 20°C**

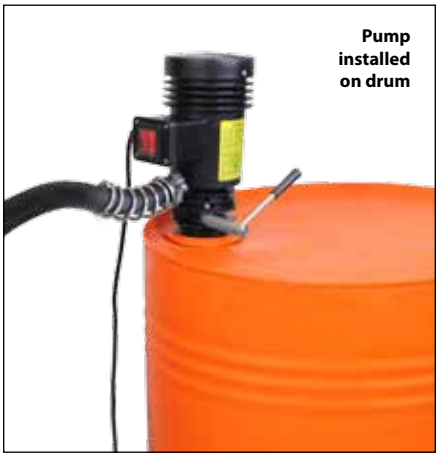


Pump installed on drum

Art. Nr.	Description	Box Qty.
EOP/DC/12	12V DC	1
EOP/DC/24	24V DC	1
EOP/AC/230	230V AC	1

FUEL EQUIPMENT

ELECTRIC DIESEL PUMPS

NEW!

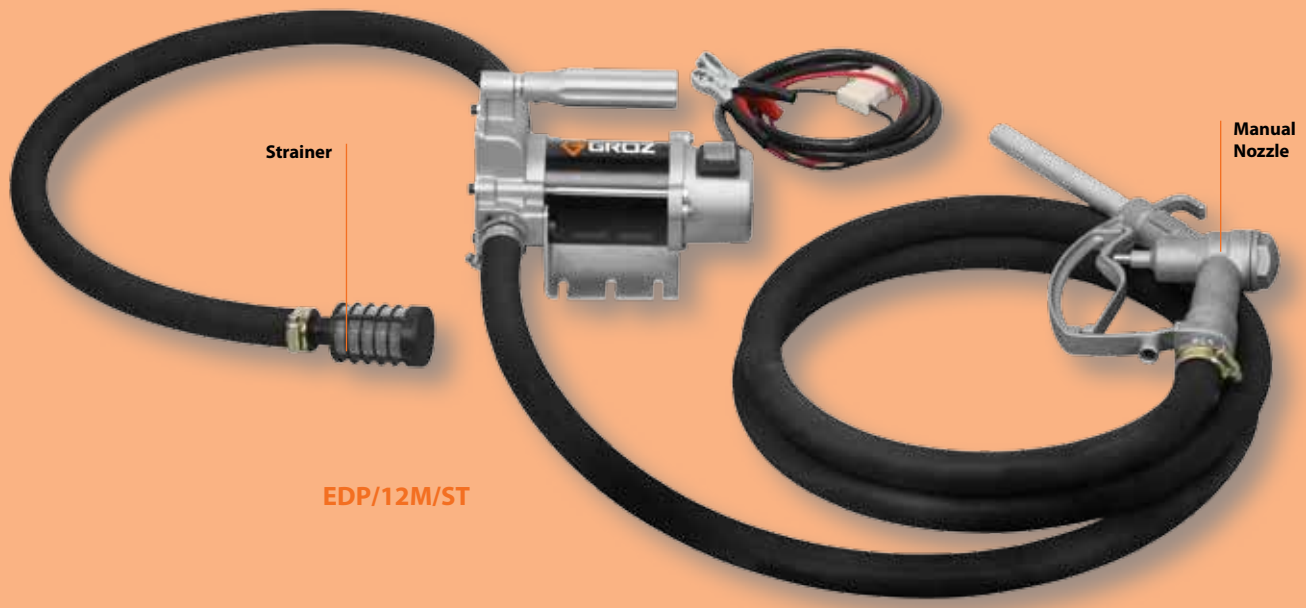

EDP/12M/ST

- Portable Diesel transfer pumps designed for everyday use in Agricultural, Construction, Automotive & Industrial applications
- Lightweight, yet strong non corroding Aluminum Die Cast Construction
- Self priming Vane pump design
- Duty Cycle: 30 Minutes On / 30 Minutes Off
- Available in a choice of 12V or 24V
- Includes pump with base plate & lift handle.
- Pump inlet & outlet threaded ¾" (F).
- Supplied complete with 4m x ¾" ID hose that can be cut into two parts for use as a suction & delivery hose.
- Includes strainer & 2m long battery cable with fuse & clamps, Aluminum nozzle for controlling fuel delivery. Hardware supplied includes 3 hose barbs (3/4") & 4 hose clamps

RECOMMENDED USE
Diesel & Kerosene

	12V DC	24V DC
Flow Rate (at pump outlet)	Upto 12 GPM (46 LPM)	Upto 12 GPM (46 LPM)
Motor	1/4 HP 12V DC	1/4 HP 24V DC
RPM	2600	2600
Amp draw from Battery	16 Amp	9 Amp
Internal bypass valve	Yes	Yes
Outlet	3/4" NPT	3/4" NPT
Battery Cable	2 metre	2 metre
Duty Cycle	30 mins. On / 30 mins Off	30 mins. On / 30 mins Off

DELIVERS

Upto 46 LPM

WARNING

DO NOT USE
Fluids with a flash point below 100°F (38°C), such as Gasoline & Alcohol

Sparking could result in explosion causing fatal injury

Art. Nr.	Description	Box Qty.
EDP/12M/ST	Pump Assembly with Manual Nozzle	1
EDP/24M/ST	Pump Assembly with Manual Nozzle	1

INDUSTRIAL ROTARY FUEL PUMPS

- Industry Standard for Rotary pumps, these are by far the heaviest duty, for severe outdoor use in extreme weather conditions
- Delivers media with a head / lift upto 20' (6 metres)
- Solid cast iron construction, fully CNC machined to close tolerances
- Pump Handle rotates a high quality sintered powder metal 3 Vane Rotor inside a highly finished pumping chamber
- Graphite Veins are self lubricating & non wearing
- High Quality graphite Seal allows the pump to be used with a wide variety of fluids
- Self Priming operation with discharge up to 38 LPM
- For use with 50 - 210 litre barrels
- **Do Not Use With:** Water Based Media
- **Available in a Choice of 2 Configurations:**

  RBP/3V: Pump with Steel Discharge Spout for use with Petroleum based fluids, Petrol, Diesel & Kerosene. Ideal for use with Barrels, drums & tanks for transferring media into smaller containers
  RBP/3V/H: Pump with 8' Antistatic Hose, Nozzle & Nozzle Holder for use with Petroleum based fluids, Petrol, Diesel & Kerosene. Ideal for use with Barrels, Drums & tanks for quickly refuelling Petrol/Diesel powered vehicles or equipment

Art. Nr.	Discharge Spout & Accessories	Box Qty.
RBP/3V	Steel	1
RBP/3V/H	8' anti-static hose, non-sparking aluminium nozzle & nozzle holder	1




ROTARY BOOSTER PUMP 3:1

- Geared Hand Operated 3:1 Rotary Barrel Pump
- Aluminium die cast pump with sintered gear driven die cast rotor & vanes
- Ideal for use where volume fuel dispensing is needed - construction sites, workshops, farms, aviation etc.
- Suitable for 50-210 litre drums
- **Recommended for use with:** Petrol, Diesel, Kerosene & Oils upto SAE 30

DELIVERS
Upto 500 ml / rotation

Empties a 210 L drum in 3 minutes

Art. Nr.	Box Qty.
RB/3H	1

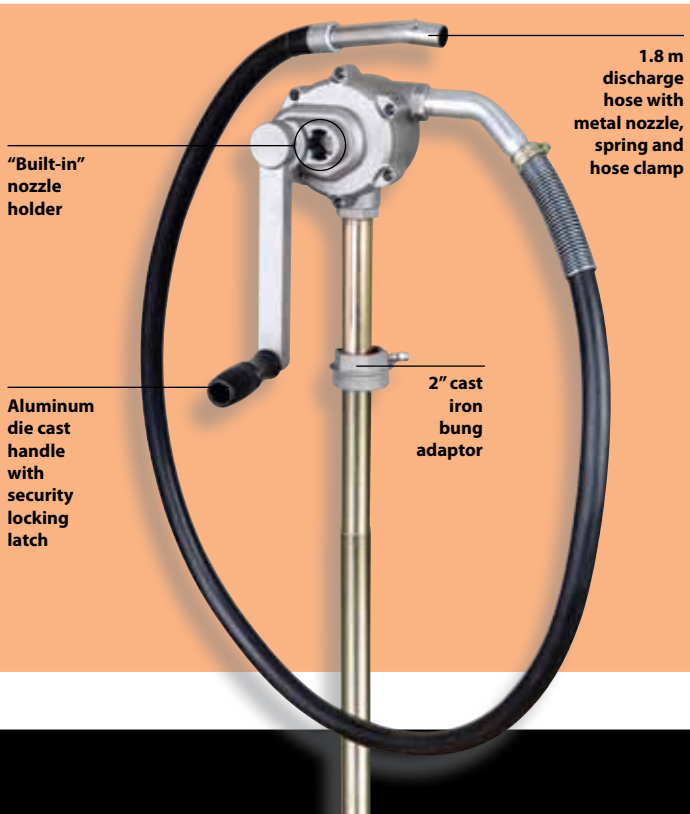

FUEL EQUIPMENT

RAPIDFLO™ ROTARY FUEL TRANSFER PUMP

macnaught

- Highly durable, high quality impellor pump incorporating a gearbox for high output and easy operation
- Pumps easily in both directions
- In built strainer
- Ideal for rapid transfer of fuels on construction sites, aviation etc.
- Suitable for 50 - 210 Litre Drums
- Pumps diesel, petrol, kerosene and lubricating oil upto SAE 30
- Available in 2 forms: Pump only, Pump complete with Mechanical Diesel Meter (DM100) for measuring fuel delivery

Empties a 210 L drum in 2 minutes

DELIVERS

Upto 800 ml / rotation



Art. Nr.	Description	Box Qty.
GP-01	Pump Only	1

DOUBLE ACTION DIAPHRAGM FUEL TRANSFER PUMP


- Double Diaphragm Hand Operated Fuel Transfer Pump
- Ideal for use on construction sites, farms, boats etc.
- Suitable for 50 - 210 litre drums
- Recommended for use with: Petrol, Diesel, Kerosene, Motor oil etc

! WARNING

- Note that Fuels containing Ethanol will cause more frequent replacement of rubber parts
- **Do not use with Fuels with Ethanol content greater than 10%**
- Never operate the pump near fire or source of spark. Some media may be explosive & dangerous to pump
- Pump is designed primarily for use with low viscosity media. Pumping heavy fluids may cause undue stress resulting in fracture

DELIVERS

Upto 800 ml / stroke

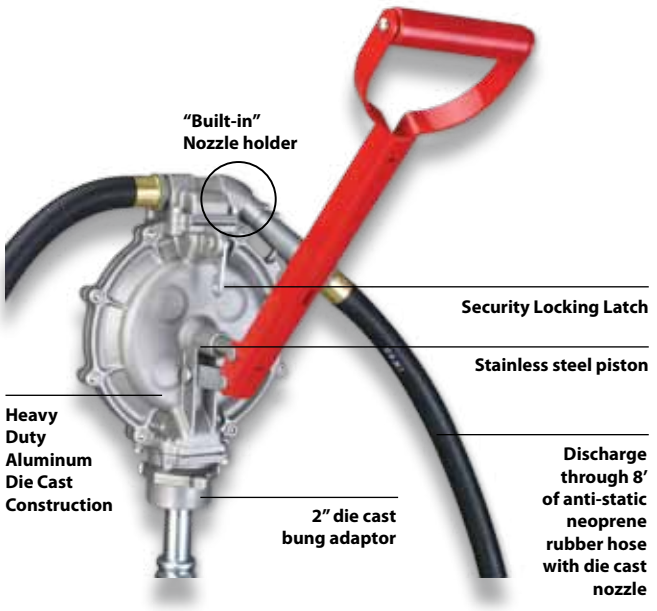

Art. Nr.	Box Qty.
DPP/1	1

F METER - HIGH ACCURACY MECHANICAL FUEL METER


NEW!

- Worlclass Mechanical Fuel Meter, extremely compact, yet easy to read
- Robust Aluminum Die Construction
- 3 Port Design which allow the meter to be fitted In – Line or with the Inlet & outlet ports at Right Angle
- Nutating Disc Mechanism offers high tolerance to fuel contamination
- For use with Electric Fuel Pumps or gravity flow (with a minimum gravity head of 4')
- Register cap can be easily removed & rotated to every 90° orientation for display reading
- Easy user re calibration
- Works with both Fuels & Oils
- Available in Litre/Gallon version in a choice of ¾" or 1" threads

RECOMMENDED USE: Diesel, Gasoline, Biodiesel, Low to Medium Viscosity Oils

DO NOT USE WITH: Water based media




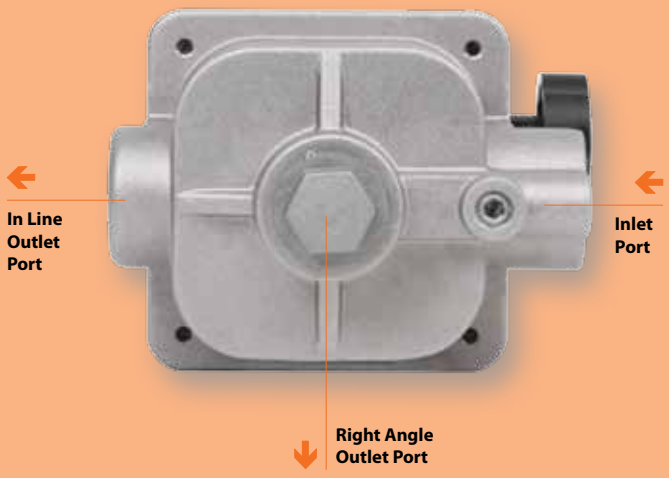

Accuracy	+/- 1%
Repeatability	+/- 0.50%
Max. Resettable Batch Total	9999 Litres
Max. Working Pressure	50 PSI (3.5 BAR)
Max. Non Resettable Totalizer	999999 Litres
Least Count / Resolution	0.10 Litres or 0.10 Gallons
Meter Dimensions	5-5/16" (135 mm) Wide 4-1/8" (105 mm) Tall 6" (150 mm) Deep

Note: Not to be used to measure media for resale

Nutating Disk Mechanism



FLOW RATE

15 to 75 LPM

TEMPERATURE

Working Temperature Range -10°C to 65°C

VERSATILE MOUNTING OPTIONS





Art. Nr.	Measurement	Threads	Box Qty.
FM-100/3-4/BSP	Litres	3/4" BSP (F)	1
FM-100/0-1/BSP	Litres	1" BSP (F)	1

FUEL EQUIPMENT

MECHANICAL OVAL GEAR FUEL METER

- High Accuracy Flow meter with Mechanical register
- **Oval Gear mechanism allows use of meter with flow rates as low as 3 LPM**
- Meter is designed for both In-Line applications & gravity flow (with a minimum gravity head of 4')
- Ideal for use with Electric Fuel pumps
- Register cap can be easily removed & rotated to every 90° orientation for display reading
- Supplied with integrated mesh strainer
- Robust Aluminium Die Cast construction

RECOMMENDED USE: Diesel & Kerosene




Flow rate	3 to 80 LPM
Inlet / Outlet	1" BSP (F)
Accuracy	+ / - 1%
Repeatability	+ / - 0.30%
Max. Working Pressure	145 PSI (10 BAR)
Max. Resettable Batch Total	999.9 Litres
Max. Non Resettable Totalizer	9,99,999 Litres
Least Count /Resolution	0.10 Litres

Note: Not to be used to measure media for resale

FLOW RATE

3-80 LPM

Art. Nr.	Box Qty.
MFM/DM100/BSP	1



Oval Gear Mechanism

MECHANICAL NUTATING DISC FUEL METER

- High Accuracy Flow meter with Mechanical register
- Nutating Disc mechanism offers high tolerance to fuel contamination
- Meter is designed for both In-Line applications & gravity flow (with a minimum gravity head of 4')
- Ideal for use with Electric Fuel pumps
- Register cap can be easily removed & rotated to every 90° orientation for display reading
- Robust Aluminium Die Cast construction
- **Easy user re calibration**

FM-10 Meter fitted to a 12V ELectric Fuel Pump



RECOMMENDED USE: Diesel, Biodiesel, Oils with viscosity upto 2000 cSt

DO NOT USE WITH: Petrol, Water based media



Inlet / Outlet	1" BSP (F)
Accuracy	+ / - 1%
Repeatability	+ / - 0.30%
Max. Working Pressure	145 PSI (10 BAR)
Max. Resettable Batch Total	999 Litres
Max. Non Resettable Totalizer	9,99,999 Litres
Least Count /Resolution	0.10 Litres


Note: Not to be used to measure media for resale

FLOW RATE

20-120 LPM

Art. Nr.	Box Qty.
FM/10/0-1/BSP	1
FM/100/3-4	1
FM/100/0-1/BSP	1

Nutating Disk Mechanism



IN-LINE FLOW METER

- Heavy Duty High Accuracy Flow meter with Mechanical register
- Oval Gear mechanism
- Meter is designed for both In-Line applications & gravity flow (with a minimum gravity head of 4')
- Flexibility of installation options (e.g. can be mounted horizontally or vertically; no flow conditioning required)
- Meter construction enables fast and easy on-site servicing without removal from application
- Handles wide varieties of media from Fuels to high viscosity oils upto SAE 140
- Robust Aluminium Cast construction
- ***Meter accuracy is verified by a factory calibration check after which an individual metrology report is issued.***




Flow rate	6 to 120 LPM
Inlet / Outlet	1" BSP (F)
Accuracy	+ / - 1%
Repeatability	+ / - 0.03%
Max. Working Pressure	500 PSI (35 BAR)
Max. Resettable Batch Total	999.9 Litres
Max. Non Resettable Totalizer	9,99,999 Litres
Least Count /Resolution	0.10 Litres

Note: Not to be used to measure media for resale

FLOW RATE

6-120 LPM

Art. Nr.	Box Qty.
MFM/M10/BSP	1



Oval Gear Mechanism

DIGITAL FUEL METER

- Digital Turbine meter for low viscosity fluids, easy to install in line or for end of the line applications
- Polypropylene Turbine measuring mechanism
- Electronic Display using two AAA 1.5V batteries
- Polyamide body and sealed electronic card make it suitable for use in severe weather conditions
- Display can be rotated in 4 different positions
- Measures in Litres, Quarts, Pints & Gallons
- **Easy user re calibration**
- Includes one additional stainless steel adaptor to convert from 1" male to 1" female threads

RECOMMENDED USE : Diesel, Petrol, Bio Diesel, Windshield Fluid, Water

DO NOT USE WITH: Oils



Flow rate	5 to 120 LPM
Inlet / Outlet	1"
Accuracy	+ / - 1 %
Repeatability	+ / - 0.30%
Max. Working Pressure	300 PSI (20 BAR)
Max. Resettable Batch Total	99,999 units
Max. Non Resettable Totalizer	9,99,999 units
Least Count /Resolution	0.001 units
Water Resistance	IP55

Note: Not to be used to measure media for resale

Art. Nr.	Box Qty.
FM/20/0-1/BSP	1

FLOW RATE

5-120 LPM

FUEL EQUIPMENT

FUEL CONTROL NOZZLES – MANUAL

- For use with Fuel Pumps & gravity feed applications
- Manual control
- All Metal Construction with the Body, Discharge Spout, Trigger & Guard made from Aluminium
- Hose Swivel at Inlet
- For use with Diesel, Kerosene & Petrol



Maximum Pressure
150 PSI (10 (BAR)



Art. Nr.	Spout Type	Inlet Thread	Spout Dia. (OD)	Max. Flow Rate	Box Qty.
FCN/S/3-4/3-4/N	Straight	3/4" NPT (F)	19 mm	57 LPM	1
FCN/S/0-1/0-1/N	Straight	1" NPT (F)	25 mm	75 LPM	1

FUEL CONTROL NOZZLES – AUTOMATIC

- For Use with Electric Fuel Pumps
- Dual Mode: Manual & Automatic. Sensor built into the discharge spout outlet automatically shuts off supply once fuel level in the tank reaches that of the outlet discharge spout
- Heavy Duty Die Cast Aluminium Body, Trigger & Guard from Thermoplastic & protective vinyl grip on the nozzle body

RECOMMENDED USE:
Diesel, Kerosene & Petrol



Maximum Pressure
50 PSI (3.45 (BAR)





Art. Nr.	Spout Type	Inlet Thread	Spout Dia. (OD)	Max. Flow Rate	Box Qty.
FCNA/3-4/N	Straight	3/4" NPT (F)	21 mm	57 LPM	1
FCNA/0-1/N	Curved with Spring	1" NPT (F)	27 mm	110 LPM	1

FUEL CONTROL NOZZLES - METERED

- Manual Fuel Control Nozzle fitted with Digital Fuel Meter
- Nozzle with Die cast Aluminium Construction with built in Swivel at inlet
- Polypropylene Turbine measuring mechanism
- Electronic Display using two AAA 1.5V batteries
- Polyamide meter body and sealed electronic card makes it suitable for use in severe weather conditions
- Measures in Litres, Quarts, Pints & Gallons
- **Easy user re calibration**

RECOMMENDED USE : Diesel & Petrol

DO NOT USE WITH: Oils

Inlet	¾" (F) or 1" (F)
Accuracy	+ / - 1 %
Repeatability	+ / - 0.30%
Max. Working Pressure	150 PSI (10 BAR)
Max. Resettable Batch Total	99999 units
Max. Non Resettable Totalizer	999999 units
Least Count /Resolution	0.001 units
Water Resistance	IP55

Note: Not to be used to measure media for resale



FLOW RATE

5-120 LPM

Art. Nr.	Inlet Thread	Spout Dia. (OD)	Box Qty.
FM/20/FCN/3-4/N	3/4" NPT (F)	19 mm	1
FM/20/FCN/0-1/N	1" NPT (F)	25 mm	1

FUEL DISPENSING KIT

Gravity feed Fuel Dispensing Kit comprising 3m Anti Static Rubber Hose, fitted with Manual Fuel Control Nozzle with Swivel



Art. Nr.	Hose Diameter	Inlet Threads	Box Qty.
FDK/3/3-4/N	3/4"	3/4" NPT (M)	1
FDK/3/0-1/N	1"	1" NPT (M)	1

FUEL HOSE

12' (72") long Replacement Anti Static Fuel Hose complete with end connections




Art. Nr.	Hose Diameter	Inlet Threads	Box Qty.
ZSA/HOS/FPM/12	3/4"	3/4" NPT (F)	1
ZSA/HOS/FPM/12/HF	1"	1" NPT (F)	1

FUEL EQUIPMENT

FILTER WRENCH

- Easy to use Filter Wrench for removing Filter Bowl when changing Filter element
- Weather Resistant re-inforced Nylon construction won't damage the bowl like metal oil filter wrenches
- Specially designed to fit Groz fuel filter bowl.
- Wire through hole provided for attaching to fuel tank

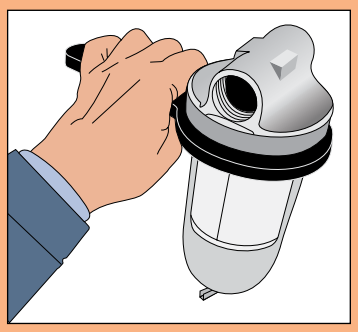

Fits fuel filter bowl for easy removal without cracking!



Art. Nr.	Box Qty.
FW/FFL-02	10

HIGH FLOW 10 MICRON FUEL FILTER

- Polypropylene bowl with Aluminium head and 10 micron Filter Element
- Suitable for use with manual or Electric Fuel Pumps
- Filters small particles of rust, scale, grit, dirt and sand
- Replacement filter element available as spare
- Water block filter element used to separate water from fuel is also available as spare

RECOMMENDED USE : Diesel & Petrol

DO NOT USE: Gasohol , Aviation Fuels, Race Fuels, water based products

Replacement Filter Element





Art. Nr.	Details	Box Qty.
FFL-02/B	Fuel Filter. Threaded 1" BSP (F)	10
FFL-02/N	Fuel Filter. Threaded 1" NPT (F)	10
FF/FFL/10	Fuel Filter Element - 10 MICRONS	10
FF/FFL/10-WB	Water Block Fuel filter element	10

FUEL FILTER - SPIN ON CARTRIDGE STYLE

NEW!

- High Flow Fuel Filter, complete with 10 micron Spin-On style filter cartridge
- Aluminum Die Cast Head, vacuum impregnated for leakproof operation
- Inlet & Outlet threaded 1" (F)
- Fits spin on cartridges with 1-1/2"-16 UNF threads
- Designed for use on both mobile & stationary fuel tanks and on gasoline & diesel fuel pumps
- Ideal for use in construction & agricultural applications
- Removes particulate contaminants such as dirt, dust & rust
- Replacement Spin-On Filter cartridges available as spare

RECOMMENDED USE: Gasoline, Diesel Fuel

DO NOT USE: With water based products, Aviation, Fuels, Race Fuels etc.





Max. Working Pressure 50 PSI (3.45 BAR)

FLOW RATE

Max. Flow: 75 LPM





Art. Nr.	FILTER ELEMENT	INLET / OUTLET	Box Qty.
FFS/10/BSP	10 µ Filter	1" BSP (F)	10
FFS/10WB/BSP	10 µ Filter Water Block	1" BSP (F)	10
REPLACEMENT CARTRIDGE			
FF/FFS/10	10 µ Filter		10
FF/FFS/10-WB	10 µ Filter Water Block		10

SPECIALITY PUMPS

ROTARY CHEMICAL PUMP



Body made from glass filled Polypropylene with Ryton veins

- Viton rubber seals & stainless steel hardware
- Suitable for 50-210 litre drums

WETTED COMPONENTS:
Polypropylene, Ryton, Viton & Stainless Steel

RECOMMENDED FOR USE WITH:
Water based media, acids, chemicals & all petroleum based fluids

DELIVERS

250 ml / rotation


WARNING

Do not use with Acetone, Lacquer, Mineral Oils, Solvents, Turpentine etc.

Art. Nr.	Box Qty.
PRP/01	1

PLASTIC LEVER PUMP

- Designed for effortless pumping of thick fluids
- Suitable for 50 - 210 litre drums

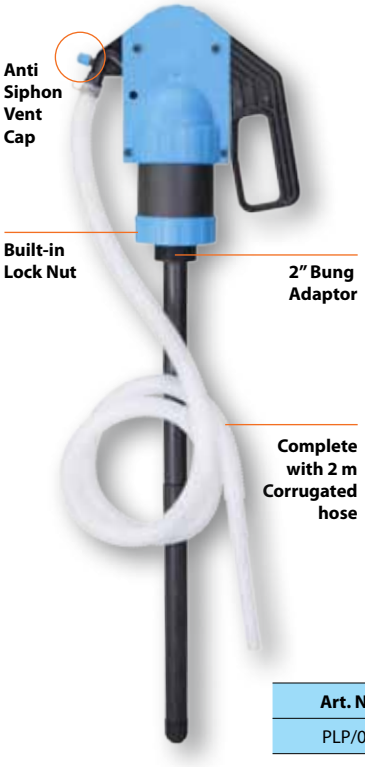

WETTED COMPONENTS:
Polyacetal, Polypropylene, Polyethylene & Viton

RECOMMENDED FOR USE WITH:
Water based media, Detergents, Soaps, Antifreeze, Windshield Washer, Hydraulic oils, Lubricants, Agricultural chemicals, Herbicides & Pesticides

DELIVERS

Upto 500 ml / stroke

Art. Nr.	Box Qty.
PLP/02	1

DIAPHRAGM / BILGE PUMP

- Hand operated Diaphragm Pump designed to work in any position - vertical, horizontal or even upside down
- Pump can be mounted anywhere - on a wall, wooden base or on a drum
- Made from Acetal, PU, Stainless Steel & PVC - the pump is virtually maintenance free

RECOMMENDED USE:
Water, Sea Water, Diesel, Kerosene, Gasoline, Mineral Oils, Heating Oils, Synthetic Oils & Engine Oil

Art. Nr.	Box Qty.
DPP/20	1

Comes complete with
a. Pump Body
b. Drum Attachment
c. Suction Hose 1.25 m x 3/4" ID
d. Discharge Hose - 2.0m x 1" ID
e. Hose for Drum Attachment
f. Delivery Nozzle
g. Stainless Steel Strainer
h. Screws
i. Hose clamps



DELIVERS

Upto 16.6 litres / minute



NYLON CHEMICAL PUMP

- Self priming Vertical Lift Pump
- Nylon construction with Stainless Steel plunger rod & PTFE seals
- Suitable for use on 50-210 litre drums



WETTED COMPONENTS: Nylon, Polypropylene, Stainless Steel & PTFE

RECOMMENDED FOR USE WITH: Lacquer, Acetone, Detergents, Glycerine, Water, Weed Killer etc.

WARNING

Do not use with strong Acids, Bleach & Petrol


DELIVERS

Upto 400 ml / stroke

Art. Nr.	Box Qty.
CMP/12	1

POLYETHYLENE SIPHON PUMPS

- Pumps media from higher to lower level by Siphon Action
- Vent Cap can be opened to stop siphon action
- For use with media at temperature under 60°C
- Pumps Water Based Fluids, Waxes, Detergents, Soaps & other light weight media

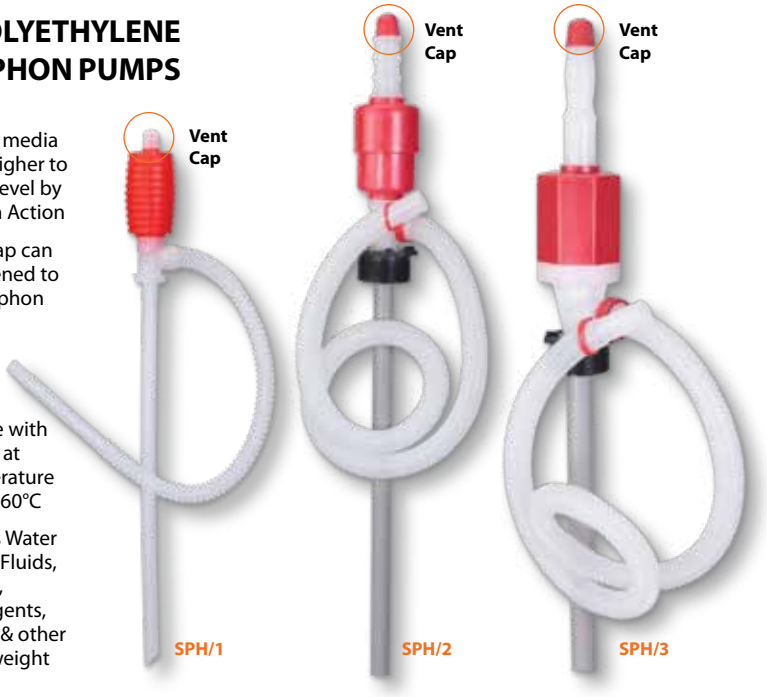

Art. Nr.	Discharge	Bung	Fits	Box Qty.
SPH/1	6.5 litres/min	1.1/2" for use with pails	5-20 litre pails	24
SPH/2	17.5 litres/min	2" for use with drums	210 litre drums	24
SPH/3	21 litres/min	2" for use with drums	210 litre drums	24

HOSE REELS

RETRACTA® AUTO REWIND HOSE REELS

macnaught

- The #1 Selling Auto Rewind Hose reel with features unmatched by any in the Industry
- Safe storage system that keeps hoses off the floor, thus reducing costly hose wear, avoiding accidents & keeping workplace organized
- Made from weather resistant, high impact UV stabilized Polypropylene
- Positive Locking Mechanism allows mounting in any position: on the wall, roof, shelf etc.
- Low rewind tension allows easy hose pull out
- Stainless Steel mouth for improved hose & reel service life
- Includes Lift Handle, Mounting Bracket that enables 180° rotation
- Supplied complete with hose
- Available in 3 types for use with Air/Water (upto a max. working temp. of 60°C), Oil and Grease



AW2101
Air/Water Hose Reel
Hose Material: Reinforced PVC
Working Pressure: 250 PSI



OMP2101
Oil Hose Reel
Hose Material: Reinforced Rubber (SAE R1)
Working Pressure: 1000 PSI




GR2061
Grease Hose Reel
Hose Material: Reinforced Rubber (SAE R2)
Working Pressure: 5000 PSI

Art. Nr.	Description	Hose Length	Hose I.D.	Reel Inlet	Hose Outlet	Box Qty.
AW2101	Compressed Air / Water	20 m	10 mm	3/8" BSP (F)	1/4" BSPT (M)	1
OMP2101	Medium Pressure Oil	10 m	10 mm	3/8" BSP (F)	1/2" NPT (M)	1
GR2061	Grease	10 m	6 mm	1/4" BSP (F)	1/4" BSPT (M)	1

DRUM HANDLING

DRUM CRADLE

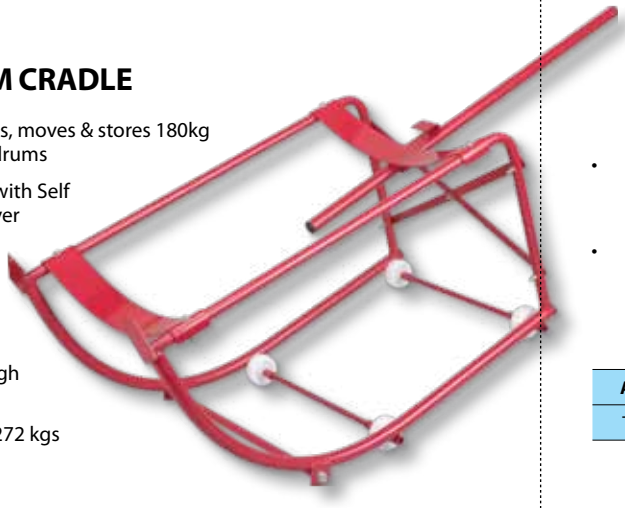

- Tips, rotates, moves & stores 180kg / 210 litre drums
- Equipped with Self Storing Lever Bar
- 63mm dia. non sparking wheels for use on rough flooring
- Max. load 272 kgs

Art. Nr.	Box Qty.
DRC/135	1

DRUM DOLLY

- Extra Heavy Duty drum dolly for convenient movement of 180 kg/ 210 litre drums
- Manufactured from solid 3mm steel sheet
- Premium powder coated finish
- Solid Cast iron wheels - 4 (75mm dia x 35mm wide)
- Holds drums of dia 23" (584mm)



Art. Nr.	Box Qty.
BDL/140S	2

LOW PROFILE DRUM TROLLEY

- Designed for convenient movement of 180 kg / 210 litre drums in shop floors
- Manufactured from solid 5mm steel sheet with loading upto 545 kgs
- Comes complete with 2 Phenolic front wheels & 1 swivelling back wheel
- Holds drums of dia 26" (660mm)



Art. Nr.	Box Qty.
TRL/55	2

TROLLEY FOR PORTABLE OIL / GREASE SYSTEMS

- Stable design with two front and one back wheel
- Convenient push mechanism to move the trolley/ drum
- Designed for convenient movement of drums upto 205 litres (180 kgs)
- Ideal for use in portable oil and grease systems



Art. Nr.	Box Qty.
TRL/210	1

DRUM WRENCH

- Easy & convenient tool to open almost all Drums
- Wrench fits perfectly onto 2" & 3/4" Drum Plugs
- Manufactured from Cast Aluminum, Hardened & tempered
- Non Sparking





Art. Nr.	Box Qty.
DRW/AL-01	10

AIR LINE ACCESSORIES

FILTER REGULATOR COMBINATION

- Compact Combination unit for removing contaminants & moisture from compressed air in addition to regulating air pressure
- Regulator has a Non raising "Press to Lock" adjusting knob for locking at any set pressure
- Filter is designed with a Separator & Shield for efficient moisture separation.



Maximum Flow Rate	20 CFM (550 LPM)
Pressure Adjustment Range	7 to 145 PSI (0.5 to 10 BAR)
Filtering Element	Sintered Bronze (40 micron)
Drain Type	Semi Automatic




Maximum Pressure 145 PSI (10 BAR)

Art. Nr.	Description	Inlet/ Outlet Port Size	Pressure Gauge Port Size	Box Qty.
FRC136134-S/GB	Miniature	¼" BSP	1/8" BSP	1
FRC139134-S/GB	Miniature	¼" NPT	1/8" NPT	1

Supplied complete with pressure gauge & mounting bracket

FILTER-REGULATOR & LUBRICATOR - 2 PC

- Space saving 2 pc Modular Filter-Regulator combination & Lbricator
- Filter removes contaminants & moisture from compressed air
- Regulator has a Non raising "Press to Lock" adjusting knob for locking at any set pressure
- Lubricator feeds lubricants to air operated equipment maintaining a constant oil-to-air density over a wide range of flow

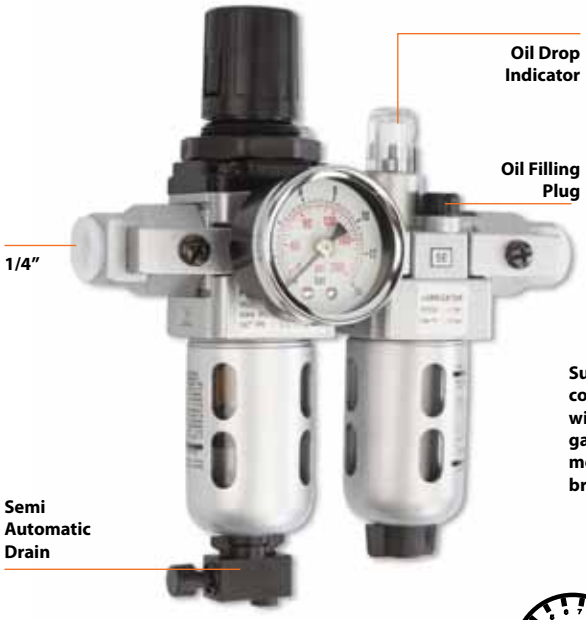

Supplied complete with pressure gauge & mounting bracket

Art. Nr.	Description	Inlet/Outlet Port Size	Pressure Gauge Port Size	Box Qty.
FRCLM136134-S/G	Miniature	¼" BSP	1/8" BSP	1
FRCLM139134-S/G	Miniature	¼" NPT	1/8" NPT	1




Maximum Pressure 145 PSI (10 BAR)

Minimum Flow Rate	0.42 CFM (12 LPM)
Maximum Flow Rate	18 CFM (500 LPM)
Pressure Adjustment Range	7 to 145 PSI (0.5 to 10 BAR)
Filtering Element	Sintered Bronze (40 micron)
Drain Type	Semi Automatic

AIR LINE HOSE

- Air Line Hose, 8 mm O.D.
- Working Pressure: 10 BAR

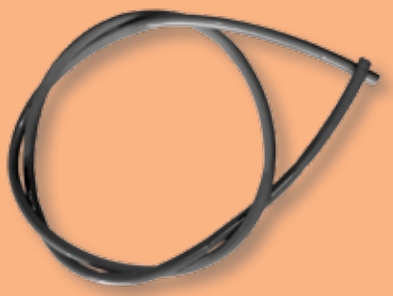

Art. Nr.	Hose Length	Box Qty.
AH/1.5/1-4/BU	1.5 m	10
AH/5/1-4/BU	5 m	10

ONE TOUCH AIR LINE FITTING

- Convert 1/4" threaded Air Inlet on Groz pumps into quick connect fittings for connecting air line to the pump
- Threaded 1/4" BSPT (M)
- For use with Air line hose with 8 mm O.D.



Art. Nr.	Box Qty.
WP2110851	20

AIR BLOW GUNS

AIR BLOW GUN - PROFESSIONAL

NEW!

- High Quality, Industrial use Air Blow gun with gun body made from Polyacetal (POM)
- Non Corroding Aluminum nozzle
- 4-1/2" (114 mm) long nozzle to access hard to reach areas
- Ergonomic gun design for extended use without fatigue
- **Brass threaded Air Inlet** ensures that threads do not shear with repeated use
- **Variable Speed Trigger** for full control of amount of air dispensed
- Silent operation
- Confirms to OSHA STD 1-13.1 for safety

Art. Nr.	Box Qty.
ABG/30/1-4F/BSP	60



Operating Pressure: 50 PSI - 150 PSI (3.5 BAR - 10 BAR)

TEMPERATURE

Operating Temperature: -10°C TO 70°C

AIR BLOW GUNS

- Redefining the Industry Standard, the Groz Air Blow Guns are both technically & aesthetically superior to any other gun
- High Impact & Weather Resistant. Gun body is made from Nylon with a Brass Threaded Insert ¼" BSP (F)
- Gun Nozzle, Tubes & Springs are made from Stainless Steel. Gun uses Nitrile Rubber Seals
- The gun has a soft moulded grip for highest convenience in use & a large handle for ease of operation
- Designed with a Variable speed trigger, the gun allows for complete control on the air dispensed
- Constant oil-to-air density over a wide range of flow

OSHA OK



Operating Pressure 3.5 BAR to 16 BAR

Art. Nr.	Tip	Noise	Blowing Force at 100 PSI	Air Consumption at 100 PSI	Box Qty.
ABG/1/1-4F/BSP	Plastic	77 db	0.26 kg	2.94 CFM	10
ABG/3/1-4F/BSP	4-1/2" SS nozzle	80 db	0.35 kg	5.30 CFM	10



TEMPERATURE

OperatingTemperature: -10°C to +70°C



ABG/1
Air Blow Gun with Plastic tip

MERCHANDISERS

customized solutions for u!

DISPLAY SOLUTIONS THAT OFFER

✓ MODULARITY

Unparalleled flexibility in assembling assortments in the dIsplay area

✓ DISPLAY EFFICIENCY

Space optimization to meet product visibility needs

✓ COST EFFECTIVENESS

Fast moving products to suit actual market needs



INCLUDES

1 Heavy Duty Stand (40" x 20" x 95"), with perforated back for hanging display on hooks

30 Hooks (15 are 6" long & 15 are 8" long)

Light Box with Groz Branding

Art. Nr.	Length	Height	Width	Box Qty.
D5	40" (1000 mm)	95" (2400 mm)	20" (500 mm)	1

*** Stand is supplied without the product**

Groz Engineering Tools (P) Ltd.
Groz Net Industries

Village Kherki Daula, National Highway-8
Gurgaon-122001, Haryana, INDIA
TEL +91.124.282.7734/40, 2827777
FAX +91.124.2827980, 2827986

E-MAIL india@groz-tools.com
URL www.groz-tools.com

The GROZ name, GROZ logo and the mark are trademarks of Groz Engineering Tools (P) Ltd., India

