

PT. IMC TEKNO INDONESIA

INJECTION MOLDING CONDITION STANDARD

QUALITY CONTROL	ENGINEERING	PRODUCTION	PREPARED BY
ALREADY SIGN			
WAHYU J			SUDIN K

DATE : 29 MEI 2026

STATUS : ☒ TRIAL ☐ MASS PRO

PART NAME : ADJUST NUT

PART NO. : M04571

CUSTOMER : PT. TOYODENSO

INJECTION MACHINE

MC no/Ton.: 38/80T SCREW Ø: 36 mm

MODEL : FE80S12ASE

CONTROLLER : NC 9000

MATERIAL

NAME : HDPE TITANUENE	GRADE : 5218 + PLAST BLACK 707	COLOUR : BLACK
DRY UP TM : 2 H	DRY UP TMP : 80 °C	REGRIND : - %
MASTER BATCH : 2 %		

PART

CAVITY : 4/4	TOTAL WEIGHT : 9,960 g
PART WEIGHT : 1 1,069 g 3 1,070 g g g	RUNNER WEIGHT : 5,666 g
: 2 1,078 g 4 1,077 g g g	ANNEALING STANDARD :

MOLD

MTC SETTING : - °C	MTC ACTUAL TEMP. : - °C	CHILLER TMP : °C
MOLD ACTUAL TEMPERATURE (± 5) °C	CAVITY SIDE : 35 °C	CORE SIDE : 35 °C

< INJ / MTG >

1. INJ TM 12 sec	2. COOL TM 12 sec	3. CYC ST TM 0,2 sec	4. MTG ST. TM - sec	5. NOZZLE BWD TM - sec			
6. V5 30 %	7. V4 10 %	8. V3 10 %	9. V2 - %	10. V1 - %			
11. TP2 3 sec	12. S5 10 mm	13. S4 15 mm	14. S3 20 mm	15. S2 - mm	16. S1 - mm	17. SM 23 mm	18. SD 5 mm
	19. P3 30 %	20. P2 10 %	21. P1 50 %	22. VS 65 %	23. BACK PRESSURE 20 kgf		

BARREL TEMPERATURE (± 10) °C

NOZZLE

Set 210 °C

Act 210 °C

FRONT

Set 200 °C

Act 200 °C

< OPEN CLOSE >

1. HI MILD CLS V 20 %	2. CLAMP SLOW V 15 %	3. LOW MLD CLS P 15 %	3. HI MLD CLS P 85 %
5. OPEN SLOW 15 %	6. HI MLD OPEN V 20 %	7. PRI OPEN V 15 %	8 PRI OPEN TM 0,2 %

MIDDLE

Set 195 °C

Act 195 °C

< EJECTOR >

1. EJECT PRES - %	2. FWD EV1 20 %	3. COUNT - %	4. START TM - %
5. MOMENT STOP 1ST LAST	6. BWD EV 4 20 %	7. BWD PRES - %	8. STOP TM - %
9. REPEAT EJECT EV 3 - %			

REAR

Set 185 °C

Act 185 °C

FEEDER TEMPERATURE (± 10) °C

°C

Limit Switch			Rev.No	Date	Description	Prod	PE	QC
LS 5	Eject forward stop	mm	△					
LS 14	Eject backward stop	mm						
LS 3	High Pressure Selection	mm	△					
LS 2	Low pressure mold clamping	mm						
LS 8	Mold opening slow down	mm	△					
LS 4	Mold opening stop	mm						

INJECTION MOLDING CONDITION STANDARD


*Referensi Pengisian Std. & Act. MCS

* DATA STATISTIC

[illegible]

✓	ROBOT RUNNER SETTING	
✓	RE- TRACK	
	USE ROBOT RUNNER	
	NOT USE ROBOT RUNNER	
	RE- TRACK	
	NO RE-TRACK	
	EJECTOR OPERATING	
	NORMAL	☐ OVERRIDE
	MONITOR	
	COUNTER	
	NOZZLE NOT LEAKING	

FLOW COOLING SYSTEM

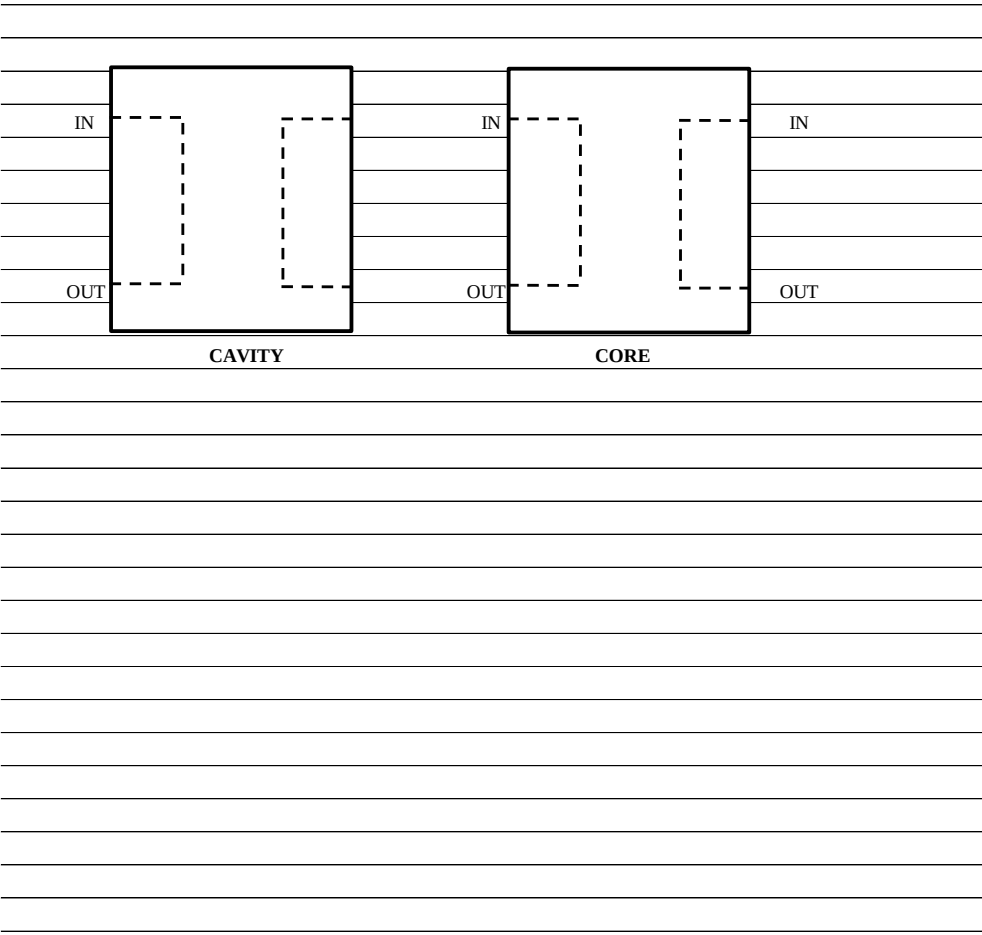

LIMIT MATERIAL STAY IN HOPPER

	Kg
--	----