2-Winding Transformer Schedule

Equipment	Secondary (V)
TX-1	600
TX-2	600
TX-3	690

Cable Schedule

Cable	Length (m)	Conductor Size	Material
CBL-1	30	240 mm²	Copper
CBL-2		300 mm²	Aluminum
CBL-3	47	120 mm²	

2-Winding Transformer Schedule

Equipment	Voltage	
	Primary (V)	Secondary (V)
TX-4	12470	690
TX-5	25000	690

2-Winding Transformer TX-8

Secondary Voltage: 690 V

Primary Voltage: 480 furlong

LV Breaker CB-8

Normally Closed: Yes

2-Winding Transformer Schedule

Equipment	Secondary (V)
TX-6	480
TX-7	600

FIELD VERIFY

Utility Source Schedule

Equipment	3-Phase Fault Current (kA) (estimate)
Utility Source UT-1	22
Utility Source UT-2	25

2-Winding Transformer TX-9

Secondary Voltage: 480 V

2-Winding Transformer Schedule

Equipment	Secondary (V)
TX-1	690
TX-2	480

Transformer inspection notes

TX-3 690 V

Single Line Diagram
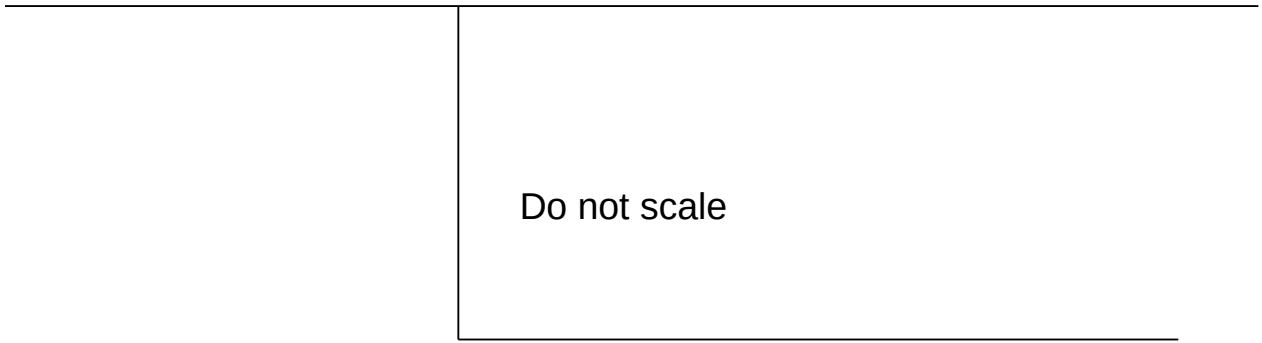
Drawing revision B