REX POWER MAGNETICS
A DIVISION OF TRANSFACTOR INDUSTRIES INC.
65 BASALTIC RD, CONCORD, ON, CA L4K 1G4
TEL: 905-695-8844 • FAX: 905-695-8855
WWW.REXPOWERMAGNETICS.COM

ENERGY EFFICIENT TRANSFORMER

- 3 Phase Isolation
- Dry Type
- ANN Self Cooled

Purchaser:	WESCO DISTRIBUTION CANADA LP
PO#:	2610-016599
SWO#:	G032224
Qty:	1

Approval Drawing

Please return this drawing and indicate one of the following:	Approved as is ☐
	Resubmit as noted ☐
App'd by:	Date:

Coils:	Aluminum
Cat. No.:	BA350J-M/Y1/Z3
kVA:	350
Primary:	600 Delta Volts
Secondary:	208 Y/120 Volts
Primary Taps:	2.5 %
-Taps FCAN	2
-Taps FCBN	2
Frequency:	60 Hz
BIL:	10 kV
Insulation Class:	220 ºC
Temperature Rise:	150 ºC
Impedance:	4.0 - 6.0 %
Min. Efficiency: (Calculated @ 35% Loaded)	99.05 %
Weight:	App.2595 Lbs

Windings	For Cable Size	Terminations
Primary @ Front	#6 AWG up to 300MCM	300MCM-6 (2/Ph)
Secondary @ Front	#2 AWG up to 600MCM	600MCM-2 (4/Ph)
Ground lugs @ the base of enclosure: 1X 300MCM-6 + 4 ports 2/0-14 AWG		

*NEMA terminal connector dimensions (CC 1-2009 Annex C)

Wiring Connection:

Primary: H1-H2-H3

Voltage	% Tap	Links:
630	105.0	1-2
615	102.5	2-3
600	100.0	3-4
585	97.5	4-5
570	95.0	5-6


Secondary: X0-X1-X2-X3


Voltage	Phase	Connect Loads To:
208	3	X1-X2-X3
120	1	X0-X1, X0-X2, and/or X0-X3

Standards:
1)- CSA Certified
2)- UL Listed

Standard Features:
1)- Anti-vibration pads installed between the enclosure base and the core & coil assembly
2)- Lug for Earth grounding provided
3)- Transformer meets NRCan 2019 & DOE 2016 minimum efficiency level

Special Features:
Y1 = C/W external anti-vibration pads (Shipped Loose)

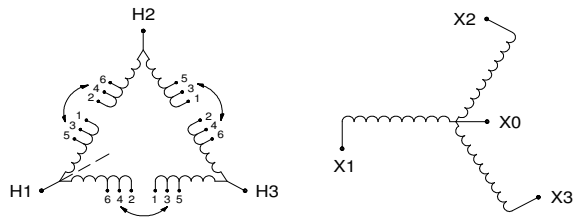

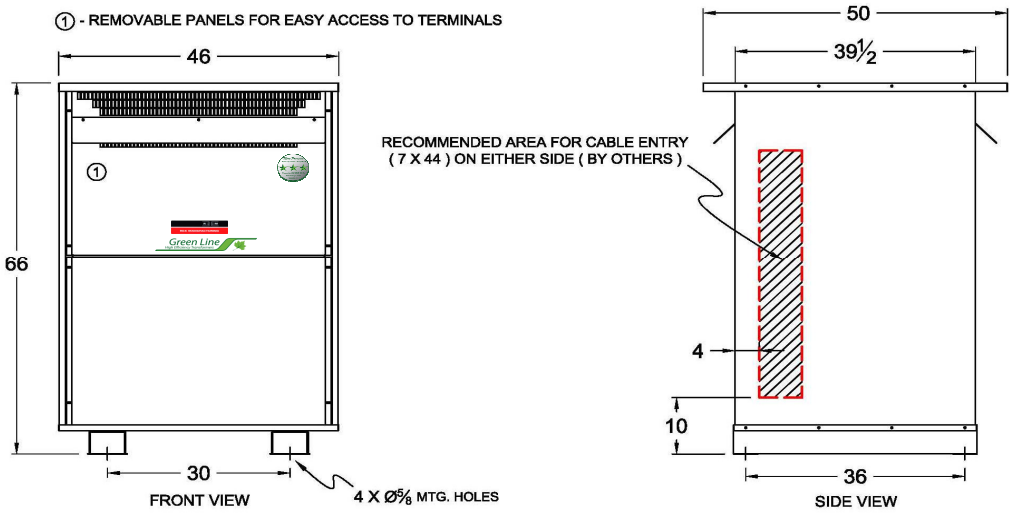

CSA Enclosure:
1)- Type 3R (NEMA 3R)
- Sprinklerproof when the angle between sprinkler heads and opening in the enclosure does not exceed 45 degree from the vertical.

2)- Ventilated
3)- ASA 61 grey
4)- Floor mounting

Rev.	Remarks	By	Appr. By	Date

Prepared by: NN
Approved by: VS
Date: APR,11, 2025