


HONEYWELL – ELSTER ROTARY POSITIVE DISPLACEMENT METERS **FOR** **GAS APPLICATIONS**

Rotary gas meters are volume-measuring devices for gaseous media which operate according to the positive displacement principle used for measuring volume flow rate of natural gas and various filtered, non-corrosive gases. These offer high accuracy over wide range of Sizes with compact dimensions.

Best in Class Specifications

	
RABO / RABO CF SERIES RPD METERS • Absolute Encoder Technology • Meter Sizes : 40 mm to 150 mm (G16 to G400) • Flow Rates: 0.6 m3 to 650 m3 • Rangeability: Up to 1:200 • Pressure rating: 150# (Up to 20 bar) • Approvals - MID/PTB • India W & M approved • LF/HF Pulse Output • 100% H2 compliant	IRM3- DUO SERIES RPD METER • Absolute Encoder Technology • Meter Sizes : 150 mm & 200 mm (G650 to G1000) • Flow Rates: 6 m3 to 1600 m3 • Rangeability: Up to 1:160 • Pressure rating: 150# (Up to 16 bar) • Approvals - MID/PTB • India W & M approved • LF/HF Pulse Output

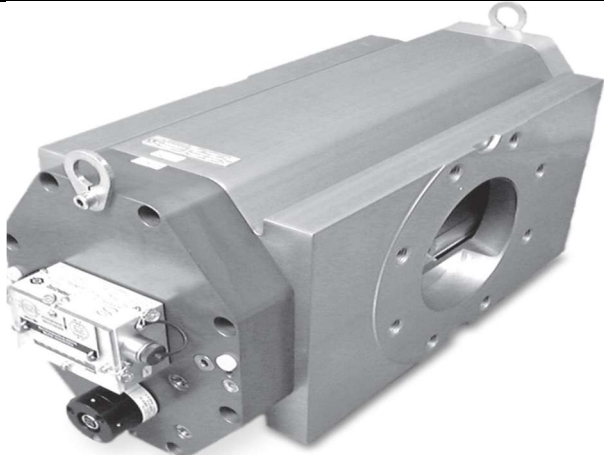