Lab 3

09 October 2020 14:09

Adithya N
1BM18CS128

Aim:

Configuring default route to the Router

Procedure:

1. Three routers and two PCs are connected as shown in the topology along with the numbered IP addresses, similar to Lab 2.
2. Pinging PC1 from PC0 at this state gives destination host unreachable
3. Adding static routes to the routers using ip route <dest. network> <subnet mask> <next hop> in the terminal, in enable and configure terminal mode.

Observation:

Pinging PC1 from PC0 and vice versa works as expected. 'show ip route' command shows connected routers.

Topology

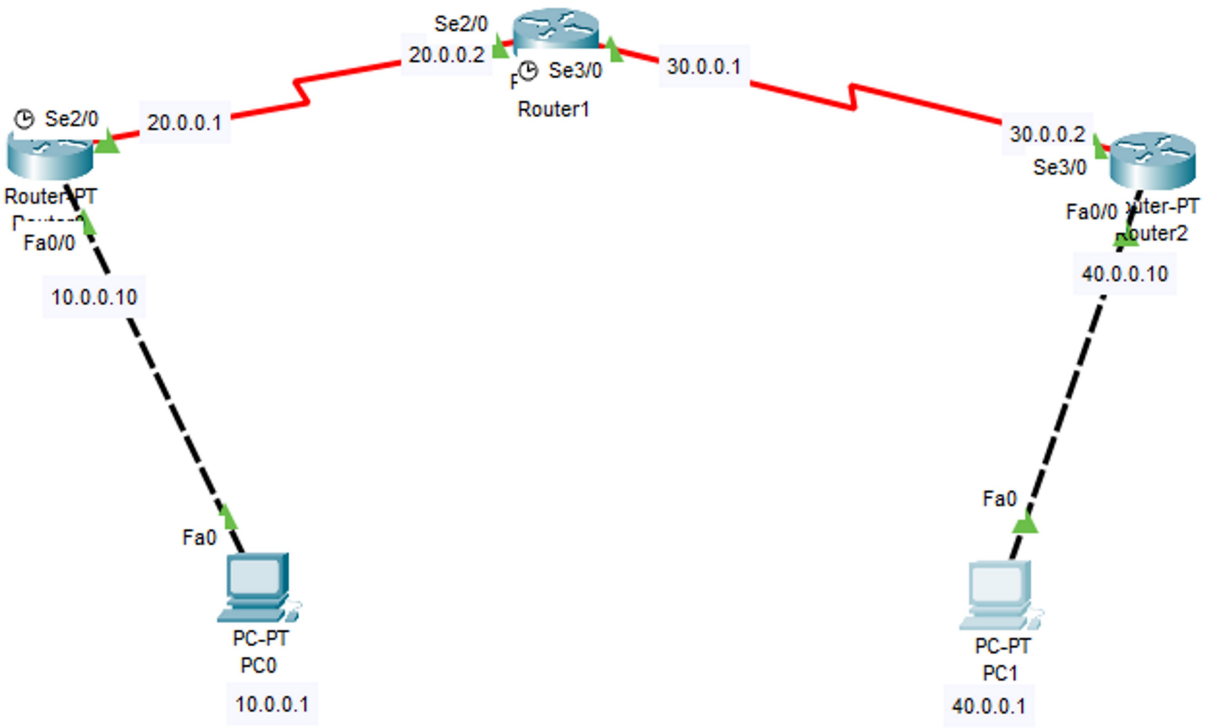

PC0 to Router 1

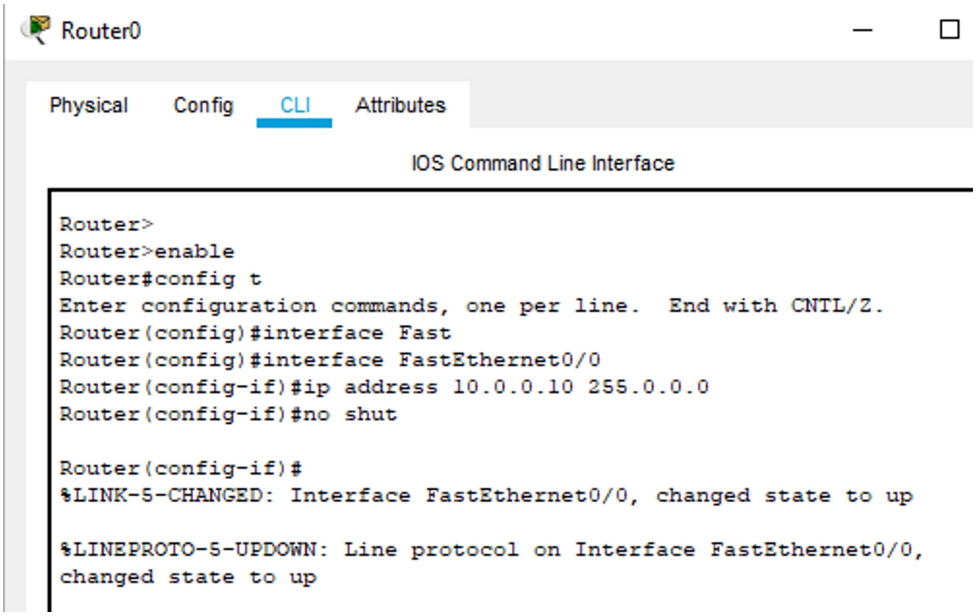

PC1 to Router2

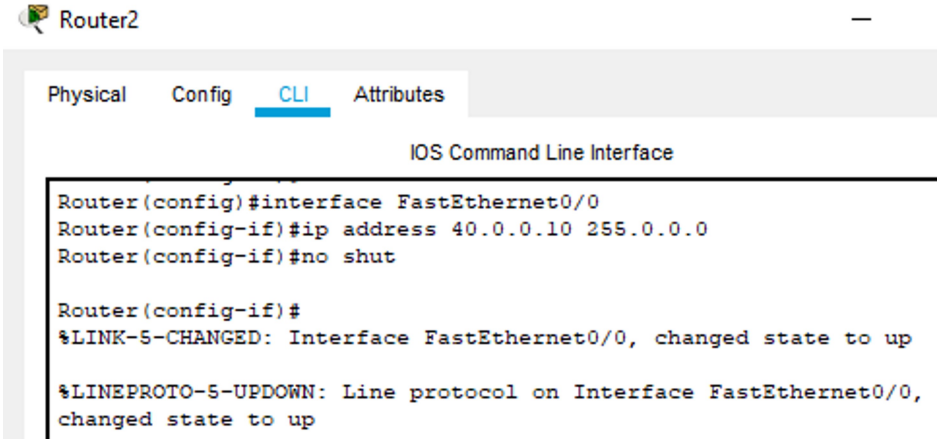

Initial Ping - Failure

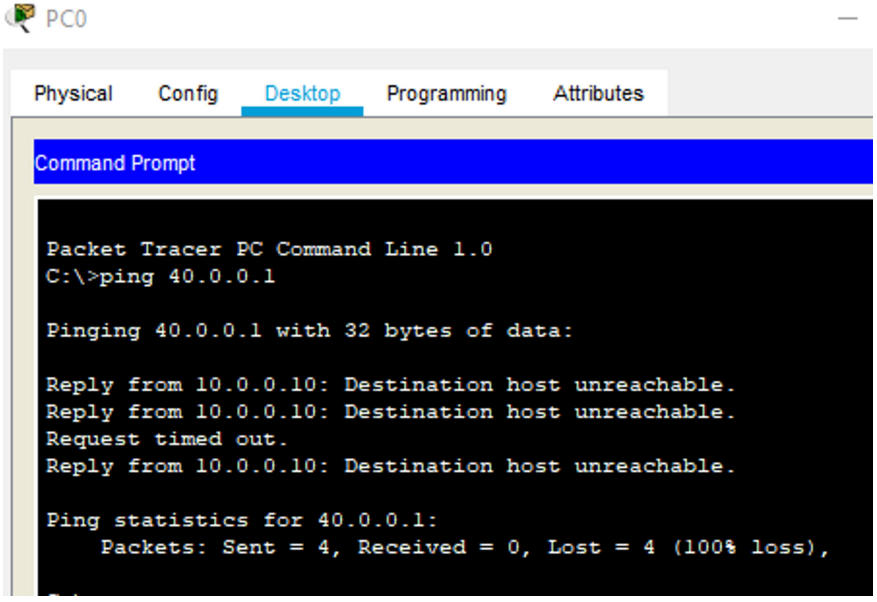

Router 0

```
Router(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2
Router(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B -
BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS
inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
C    20.0.0.0/8 is directly connected, Serial2/0
S    30.0.0.0/8 [1/0] via 20.0.0.2
S    40.0.0.0/8 [1/0] via 20.0.0.2
```

Router 1

```
Router(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
Router(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.2
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B -
BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS
inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
C    20.0.0.0/8 is directly connected, Serial2/0
C    30.0.0.0/8 is directly connected, Serial3/0
S    40.0.0.0/8 [1/0] via 30.0.0.2
```

Router 2

```
Router(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
Router(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.1
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B -
BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS
inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
S    20.0.0.0/8 [1/0] via 30.0.0.1
C    30.0.0.0/8 is directly connected, Serial3/0
C    40.0.0.0/8 is directly connected, FastEthernet0/0
```

Pinging works as expected

PC0

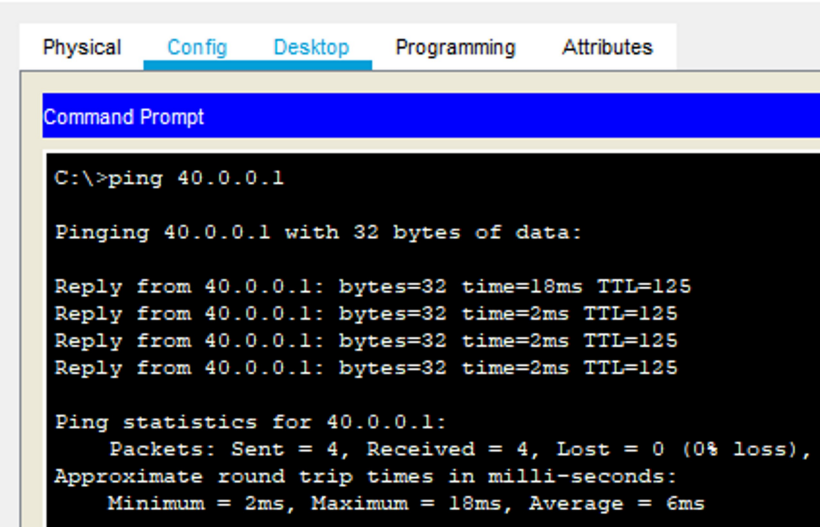

PC1