



RS Series Glasteel® Reactors




Pauler, Inc.


A Unit of Robbins & Myers, Inc.



SRW Mixer Drive

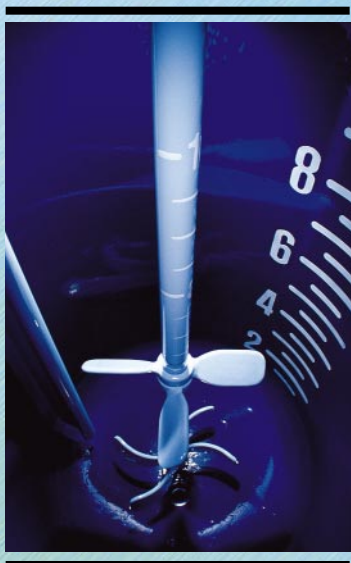

Dual Flight Agitator

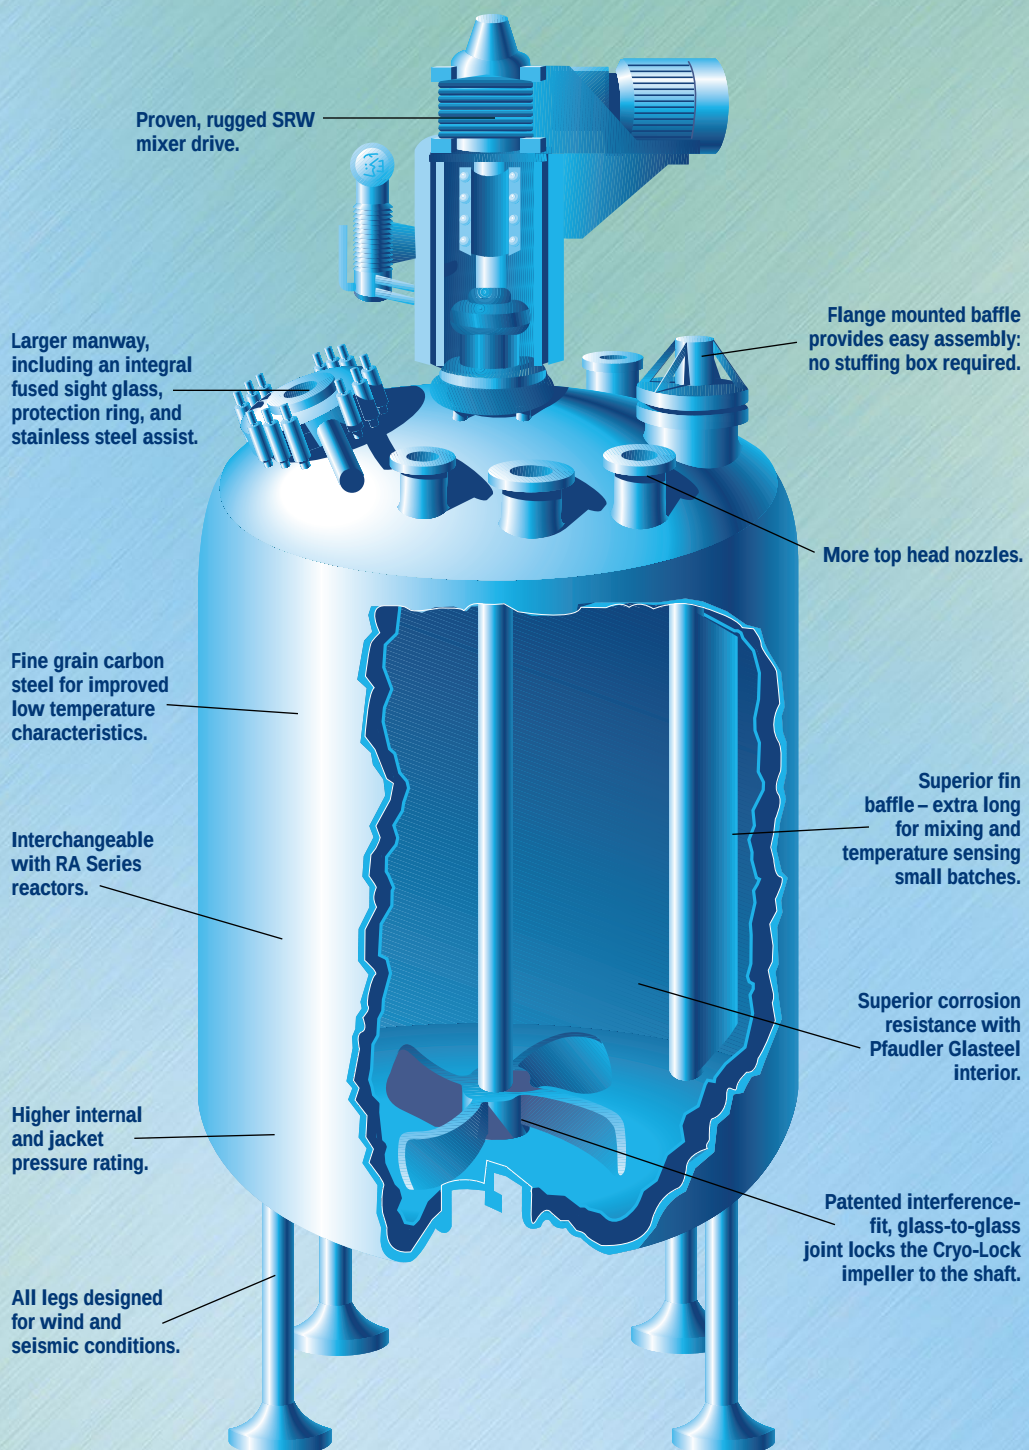

Pfautler RS Series

Introducing the new “standard” in glass-steel reactor design for the chemical process industry.

Offering the same basic features Pfautler has provided for decades – top quality, reliability and ruggedness. But now with a new series of features which are Pfautler-exclusive and unmatched in the industry.

Larger Manways

All RS Series reactors now have large diameter manways for easier and safer access into the reactor. Also, an integrally fused sight glass (there is no mounting hardware) and stainless steel spring assist are now standard.

Higher Pressure Ratings

Since many chemical processes today require higher pressures, we have increased the internal pressure rating by 25%! All RS Series reactors are rated for 125 psig internal pressure. All jackets are rated for 100 psig.

Cryo-Lock® Mixing System

Pfautler's patented shrink-fit glassed impellers are designed to fit through the manway and are installed inside the reactor without having to remove the shaft, drive or motor. Impellers are quickly installed, resulting in significantly reduced downtime costs.

The standard impeller is the versatile curved blade turbine which promotes excellent blending, gas dispersion, suspension and heat transfer. However, a variety of impeller designs are available to handle every mixing requirement. Pfautler will recommend the optimum configuration for your specific application.

Fin Baffle

The effectiveness of a baffle is a function of its shape, size and placement within the reactor. The “fin” is the latest design in glass-lined baffle technology and offers a flat blade, has a generous overall width and is oriented toward the vessel wall. This results in a substantial increase in effectiveness over competitive offerings.

In addition, our fin baffle is flange mounted (which eliminates the stuffing box), is easily installed and extends to within inches of the bottom head. Low level baffling and temperature sensing is now possible.

Top Head

More process nozzles are provided, and the large drive access cover has been eliminated. No more large gaskets to shim or numerous clamps to tighten.

Low Temperatures

Many processes today run at lower temperatures. All shells and heads of the RS Series utilize fine grain carbon steel which have significantly improved low temperature characteristics.

Easy Installation

The RS-Series reactor can replace existing standard RA vessels with minimal piping or support modifications.

Standard and Custom Designs

Choose from a full line of Pfautler RS-Series Glasteel reactors, with models ranging from 300 to 15,000 gallons. These configurations can be customized to meet specific design requirements.

Why Use a Glasteel Reactor

The specially formulated glass lining, fused to a steel substrate, is highly corrosion resistant and chemically inert to nearly all substances. It is the ideal environment for processing ultra-pure products.

Its smooth surface resists adherence by viscous or sticky materials and cleans easily.

Glasteel is strong. Fusing glass to steel produces a composite material with the advantages of glass and the strength of steel. It has a high resistance to impact and thermally induced stresses.

RS48-Series

design pressure (psig)

	300 gal.	500 gal.
Internal @ 450°F	125/FV	125/FV
Jacket @ 450°F	100/FV	100/FV

dimensions (inches)

A	33	58
B	48	73
C	52.25	77.25
D	122.625	147.625
E	32	51

capacity (gallons)




Working	300	500
Top Head	63	63
Bottom Head	63	63
Per Inch of Straight Side	7.83	7.83
To Bottom of Impeller	20	20
To Top of Impeller	54	54
To Bottom of Baffle	42	42
Jacket	75	110

heating area (square feet)


Jacket (total)	53	80
Bottom Head	17.4	17.4
Per Inch of Straight Side	1.05	1.05

weight (pounds)

Without Accessories	3,550	4,750
Total – Including Drive, Agitator, Baffle	4,800	6,200
Add for Shipment	150	150

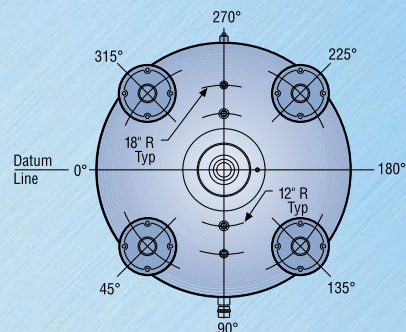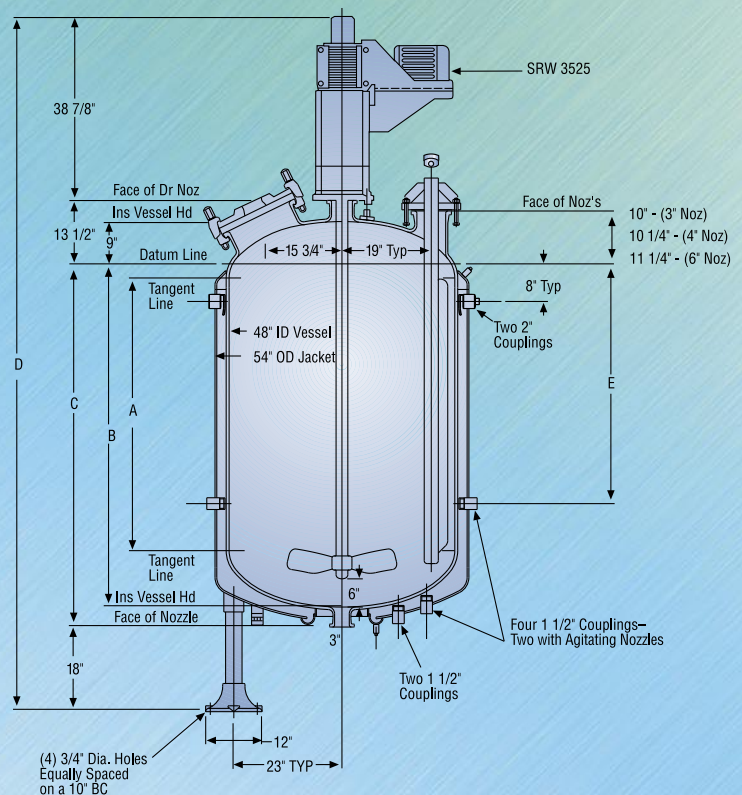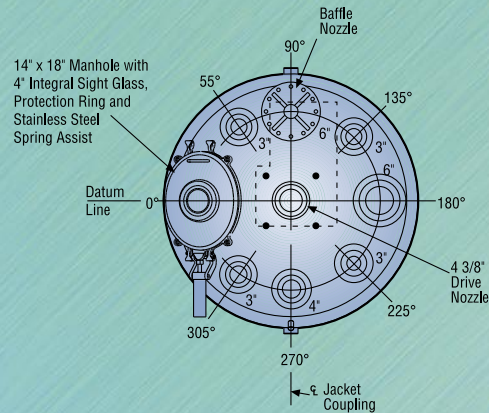

RS60-Series

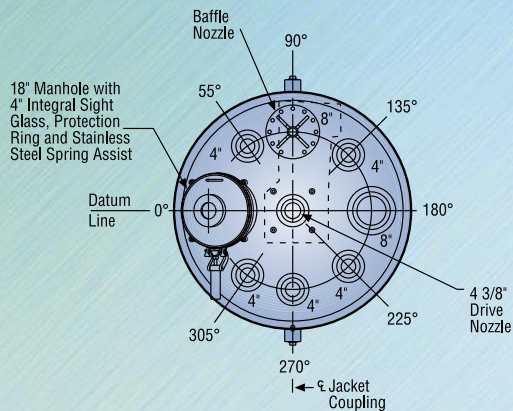

design pressure (psig)

	750 gal.	1000 gal.
Internal @ 450°F	125/FV	125/FV
Jacket @ 450°F	100/FV	100/FV

dimensions (inches)

A	52	72
B	70	90
C	74.25	94.25
D	147.375	175.625
E	33.5	47.5
F	47.5	67.5

capacity (gallons)



Working	750	1000
Top Head	122	122
Bottom Head	122	122
Per Inch of Straight Side	12.24	12.24
To Bottom of Impeller	34	34
To Top of Impeller	98	98
To Bottom of Baffle	67	67
Jacket	141	171

heating area (square feet)

Jacket (total)	96	122
Bottom Head	27.1	27.1
Per Inch of Straight Side	1.31	1.31

weight (pounds)

Without Accessories	6,050	7,250
Total – Including Drive, Agitator, Baffle	7,900	9,450
Add for Shipment	200	200

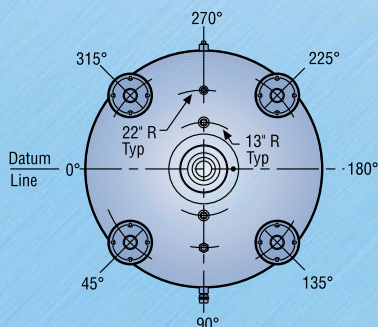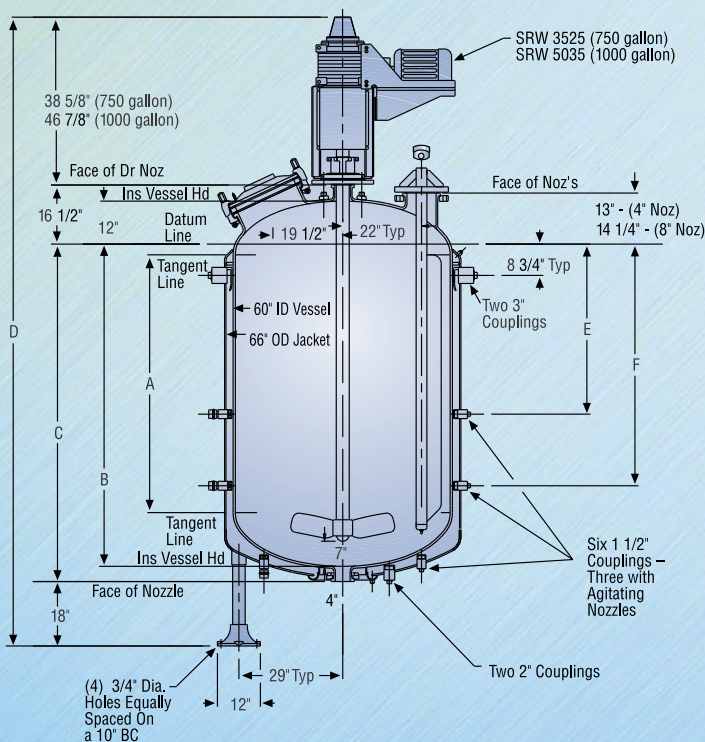

RS78-Series

design pressure (psig)

Internal @ 450°F 125/FV 125/FV

Jacket @ 450°F 100/FV 100/FV

dimensions (inches)

A	65	84
B	87.5	106.5
C	92.5	111.5
D	179	198
E	43	60
F	61	81

capacity (gallons)




Working	1500	2000
Top Head	269	269
Bottom Head	269	269
Per Inch of Straight Side	20.69	20.69
To Bottom of Impeller	60	60
To Top of Impeller	165	165
To Bottom of Baffle	135	135
Jacket	255	301

heating area (square feet)


Jacket (total)	158	191
Bottom Head	45.8	45.8
Per Inch of Straight Side	1.70	1.70

weight (pounds)

Without Accessories	11,630	13,380
Total – Including Drive, Agitator, Baffle	14,000	15,900
Add for Shipment	450	450

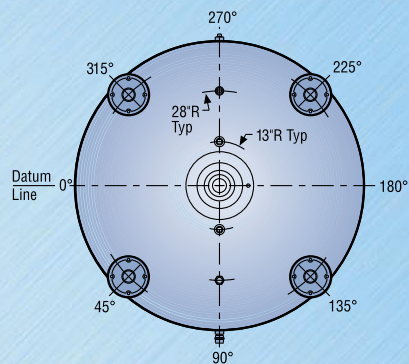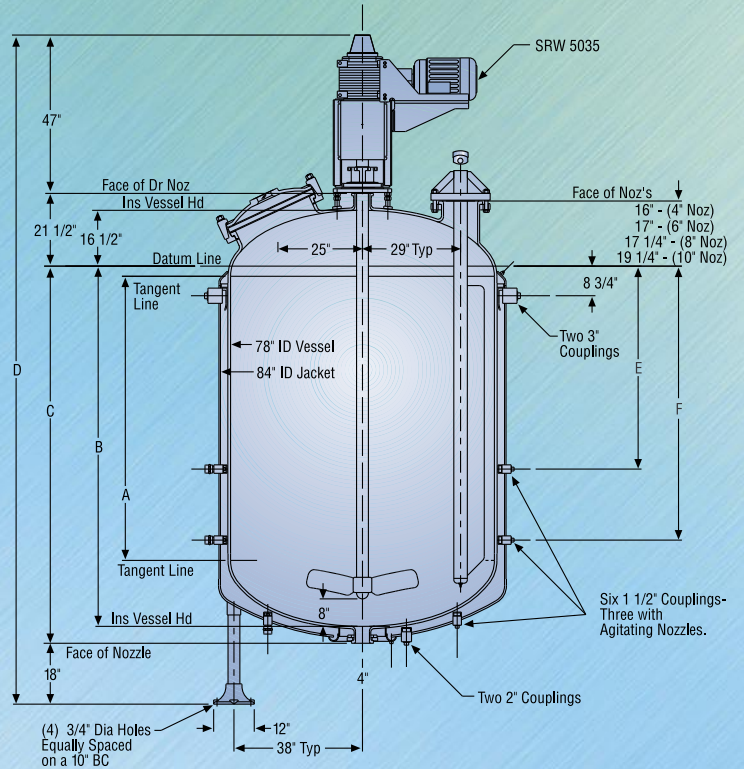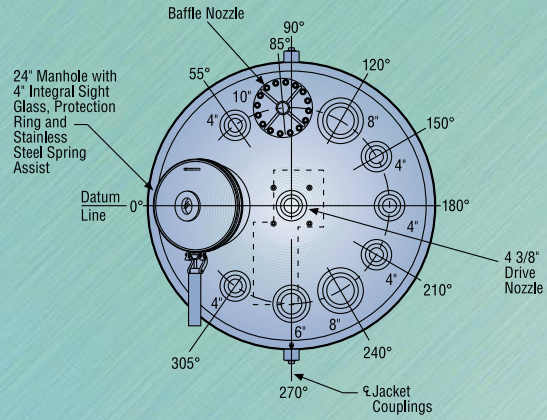

RS96-Series

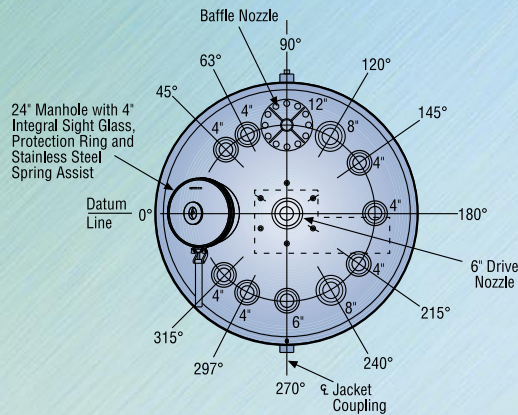

design pressure (psig)

	3000 gal.	4000 gal.
Internal @ 450°F	125/FV	125/FV
Jacket @ 450°F	100/FV	100/FV

dimensions (inches)

A	77	109
B	105.5	137.5
C	110.5	142.5
D	213.75	251.5
E	52.5	72.5
F	74.5	102.5

capacity (gallons)



Working	3000	4000
Top Head	501	501
Bottom Head	501	501
Per Inch of Straight Side	31.33	31.33
To Bottom of Impeller	93	93
To Top of Impeller	320	320
To Bottom of Baffle	258	258
Jacket	366	453

heating area (square feet)


Jacket (total)	236	300
Bottom Head	69.4	69.4
Per Inch of Straight Side	2.09	2.09

weight (pounds)

Without Accessories	20,950	26,300
Total – Including Drive, Agitator, Baffle	26,000	30,400
Add for Shipment	900	900

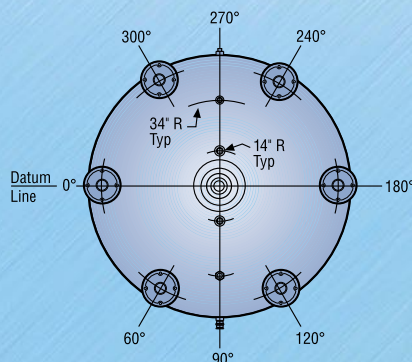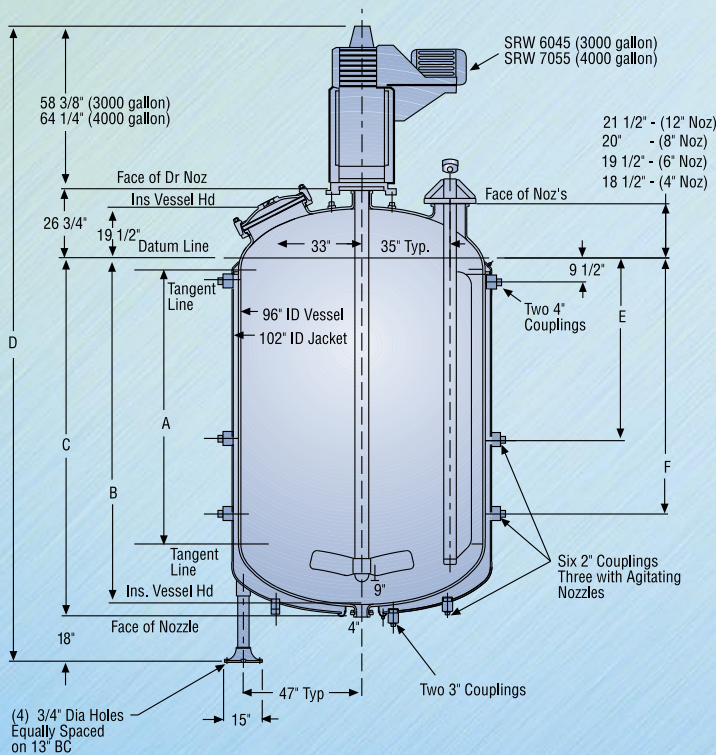

SB81-500-2

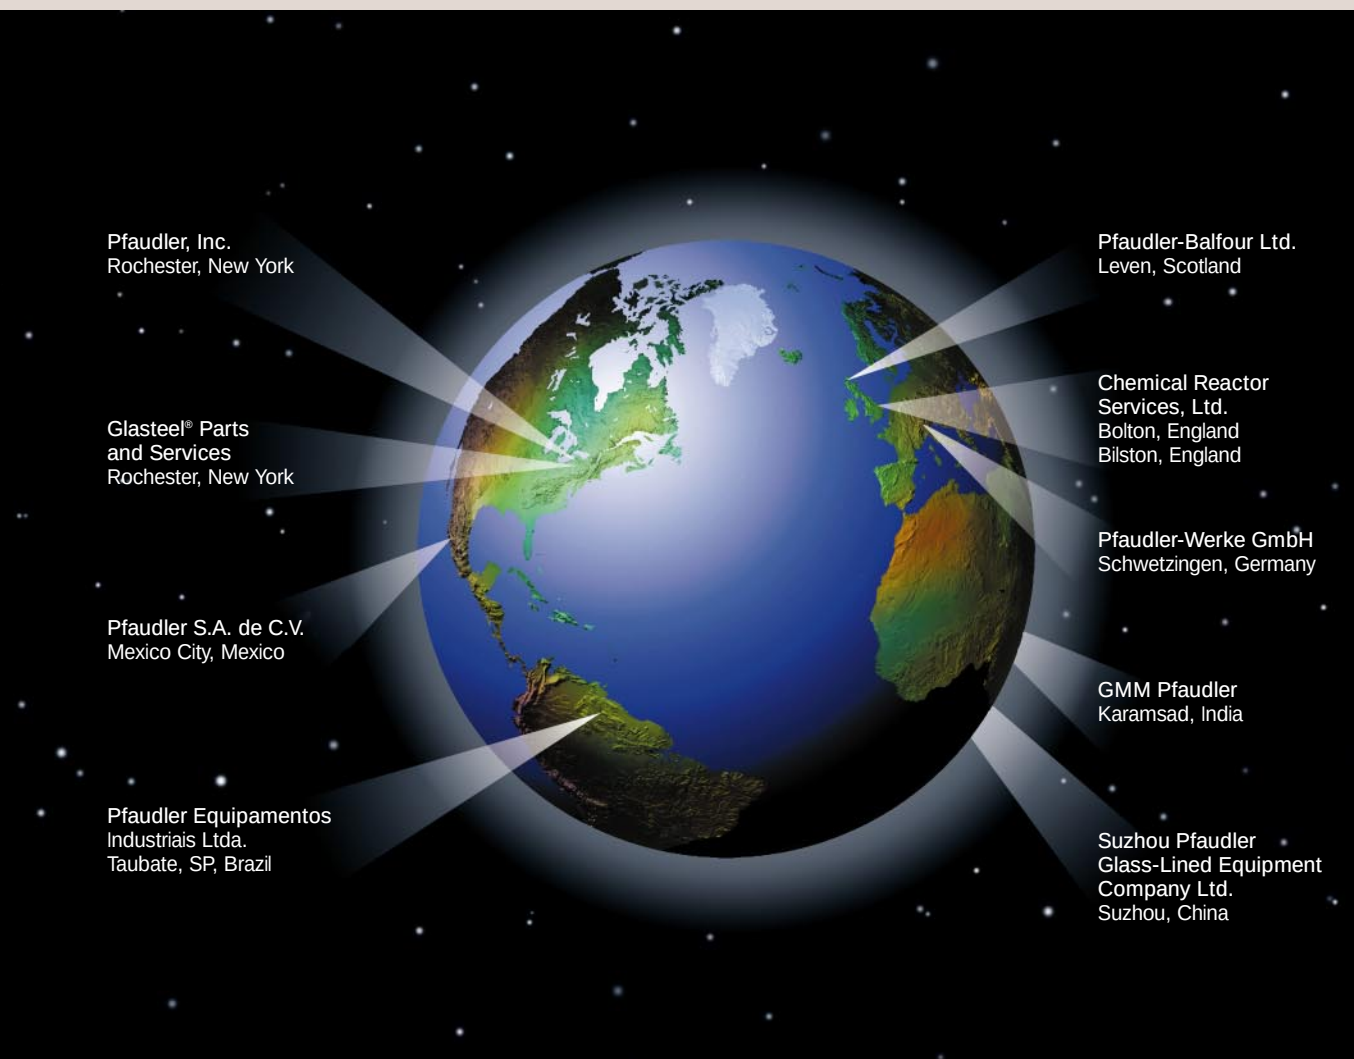

The information contained in this bulletin is believed to be reliable general guidelines for consideration of the products and services described herein. The information is general in nature and should not be considered applicable to any specific process or application. Pfaudler, Inc. expressly disclaims any warranty, expressed or implied, of fitness for any specific purpose in connection with the information contained herein.

US Facilities

Pfaudler, Inc.
Rochester, New York
Tel: (1 716) 235-1000
Fax: (1 716) 423-9644

Glasteel® Parts and Services
Rochester, New York
Tel: (1 716) 235-1010
Fax: (1 716) 235-7923

Worldwide Facilities

Chemical Reactor Services Ltd.
Bolton, England
Tel: (44 1204) 862-777
Fax: (44 1204) 577-484

Bilston, England
Tel: (44 1902) 353-637
Fax: (44 1902) 495-696

GMM Pfaudler
Karamsad, India
Tel: (91 26) 9230367
Fax: (91 26) 9231935

Pfaudler-Balfour Ltd.
Leven, Fife, Scotland
Tel: (44 1333) 423-020
Fax: (44 1333) 427-432

Pfaudler Equipamentos Industriais Ltda.
Taubate, SP, Brazil
Tel: (55 122) 326-244
Fax: (55 122) 217-562

Pfaudler S.A. de C.V.
Mexico City, Mexico
Tel: (52 5) 355-0100
Fax: (52 5) 355-0809

Pfaudler-Werke GmbH
Schwetzingen, Germany
Tel: (49 620) 2850
Fax: (49 620) 222412

Suzhou Pfaudler Glass-Lined Equipment Company Ltd.
Suzhou, China
Tel: (86 512) 534 1622
Fax: (86 512) 534 0870

PFAUDLER, Inc.

A Unit of Robbins & Myers, Inc.

1000 West Avenue
PO Box 23600
Rochester, NY 14692-3600
Tel: 716 235 1000
Fax: 716 423 9644
www.pfaudler.com

Copyright ©Pfaudler, Inc. 1998
A Unit of Robbins & Myers, Inc.
All rights reserved

Glasteel® and Cryo-Lock® are registered trademarks of Pfaudler, Inc.