🪟 Lumina Blackout Blinds Installation

🧰 What's included

Everything you need comes in the box (frames, strips, screws, blinds), so you **don't need extra tools**.

1) Assemble the frame

- Lay out all frame pieces (sides, top, bottom, fabric)
- Match numbered ends and connect them together
- Tighten cords if needed (controls tension)
- Hold tightly on the fabric end and tighten cords

Assemble corners

Don't remove the packing until end

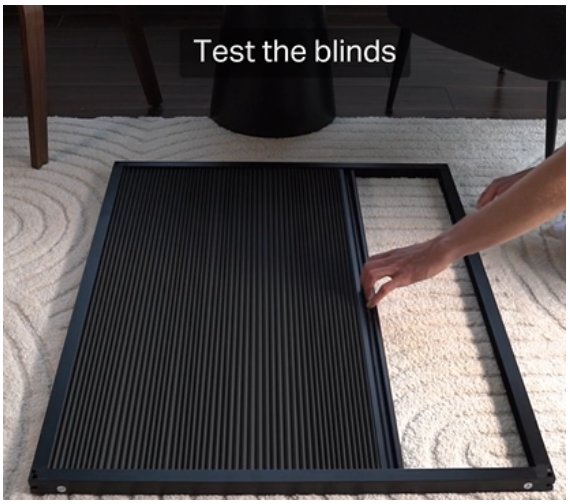

👉 Tip: Test opening/closing before moving on.

2) Apply sealing strips

Weather strip (top seal)

- Peel backing
- Stick around all 4 sides (high on frame) towards the edge
- Don’t stretch at corners—keep neat 90° angles

Peel of back-strip

stick strip on edge

3) Fit into window

- Insert blinds at about a **70° angle**
- Push bottom in first, then the top
- Test movement (open/close)

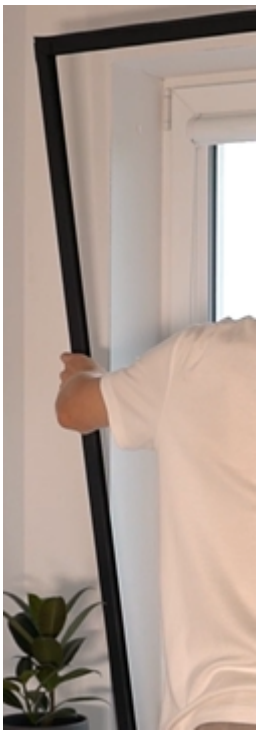

---

4) Secure in place (optional but stronger)

- Drill holes (~8 mm deep)
- Insert wall plugs
- Add double-sided tape to bottom frame
- Screw top frame into place

---

5) Seal edges

- Apply caulk around edges
- Smooth it out for airtight, light-proof finish

⚠️ Key requirements

- Window must be **square**
- Needs at least **~3 cm (1.18″) recess depth**

👍 Practical tips (not in the guide but useful)

- Clean the window frame before sticking strips
- Don’t overtighten cords—makes blinds harder to slide
- If it doesn’t sit flush, check strip placement first

🪟 Installation — What’s Different / Important

🔧 1) Cord tension matters (this is the big one)

LUMINA relies entirely on cord tension to stay tight and slide properly.

- After assembling the frame, **pull the cords evenly on both sides**
- The fabric should be:
  - **Taut but not stretched**
  - Not sagging in the middle
- Lock the cords once adjusted

👉 If it's too loose → blinds sag
👉 If it's too tight → hard to open/close

🧩 2) Frame squareness is critical

LUMINA doesn't "self-adjust" like newer versions.

- Make sure corners are fully pushed in before fixing to window
- If the frame is even slightly skewed:
  - It'll stick when sliding
  - Light gaps will appear

👉 Quick check: measure diagonals corner-to-corner — they should match.

🧷 3) Strip placement really matters

With Guard 1, strips do most of the sealing work.

- **Weather strip (top layer)** = airtight fit
- **USE EXTRA STRIP** on back of corners so if light bleed is visible this will block
- Strips too thick or misaligned → won't sit flush – position strips close to edge straight
- Cut small strips about 7cm and cover back of blinds in corners like below picture and stick to wall and bottom window sill covering the corner completely

💡 Key tip:

- Don’t overlap strips at corners — cut clean joins
- If corners leak light, it’s almost always strip placement

🔩 4) Securing it (recommended) benefits a lot from being fixed:

- Screw the **top frame in place**
- Use adhesive on the bottom

👉 This prevents shifting over time (which causes gaps/light leaks)

⚠️ Common LUMINA mistakes

These are the usual problems people hit:

- Uneven cord tension → blind pulls to one side
- Over-tightened cords → jerky movement
- Frame not square → sticking
- Strips too thick or misaligned → won’t sit flush

👍 Quick “done right” checklist

- Slides smoothly with one hand
- No sag in fabric
- No visible light around edges
- Feels snug in the frame (not rattling)