

INTEGRATED HEADING SENSOR

Model

PG-700

Fluxgate magnetic sensor with enhanced stability by a solid-state rate gyroscope



- ▶ A fluxgate magnetic sensor in conjunction with a solid-state angular rate heading
- ▶ Offers a high level of accuracy and stability : $\pm 1.0^\circ$
- ▶ Compact unit with L-bracket allows flexible installation
- ▶ Automatic magnetic field distortion correction* *Correction should be done first by manual.
- ▶ Provides precision heading data to Furuno CAN bus devices



What is CAN bus?

CAN bus is a communication protocol that shares multiple data and signals through a single backbone cable. You can simply connect PG-700 onto the backbone cable to expand your network onboard. With CAN bus, IDs are assigned to all the devices, and status of each sensor in the network can be monitored.

SPECIFICATIONS OF PG-700

1. Accuracy

$\pm 1.0^\circ$ (horizontal)*

*When magnetic field distortion corrected.

NOTE: Sensor accuracy depends on installation and other factors

2. Heading resolution

0.1°

3. Follow-up

$45^\circ/\text{s}$ rate-of turn

4. Interface

Port:

CAN bus: 1

Output:

Vessel Heading (127250),
Magnetic Compass Status* (065284),
ISO Acknowledgement (059392),
ISO Request (059904),
Address Claim (060928),
NMEA Acknowledge (126208),
PGN List (126464),
Product Information (126996),
Self Test Report* (130816),
Heading & Attitude Sensor Control Status* (130818),
Unit Division Code* (130822),
Browser Control Status* (130823),

Magnetic Compass Control Status* (065283),
Rate Gyro Data* (065285),
GMM Message* (126720, #4=4)
ISO Request (059904),
Address Claim (060928),
Self Test Group Function* (061184),
Memory Clear & Reset Group Function* (126720),
NMEA-Request & Command Group Function (126208)

Input:

(*:Furuno PGN)

ENVIRONMENT

Temperature:

-15° to $+55^\circ\text{C}$

Waterproofing:

IP55

POWER SUPPLY EQUIPMENT LIST

Standard


1. Heading Sensor PG-700
2. Installation Materials Includes interface 6m cable:
M12-05BM+05BF-060 (19S1162)

Option


1. Junction Box FI-5002
2. Interface Cable FI-50-DROP

DIMENSIONS AND WEIGHT PG-700


0.35 kg 0.77 lb

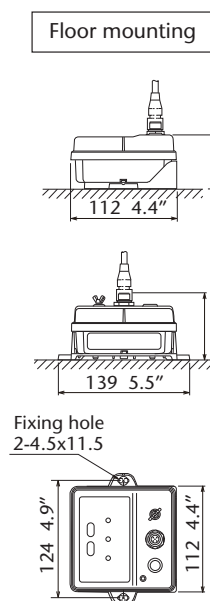

Bulkhead mounting

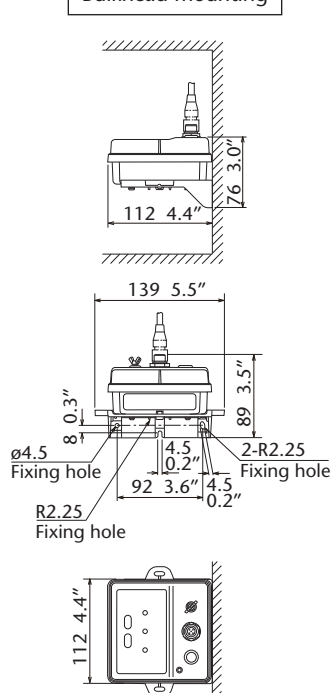

INTERCONNECTION DIAGRAM

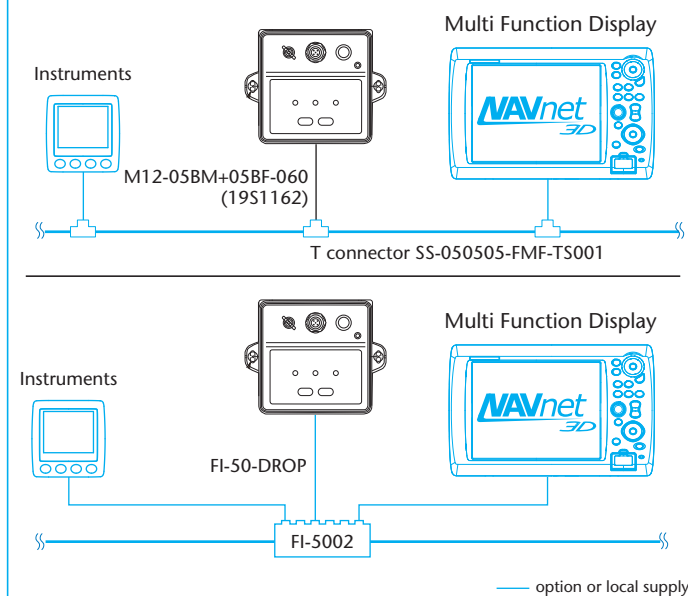

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.

Nishinomiya, Hyogo, Japan
www.furuno.co.jp

FURUNO U.S.A., INC.

Camas, Washington, U.S.A.
www.furunousa.com

FURUNO (UK) LIMITED

Havant, Hampshire, U.K.
www.furuno.co.uk

FURUNO FRANCE S.A.S.

Bordeaux-Mérignac, France
www.furuno.fr

FURUNO ESPAÑA S.A.

Madrid, Spain
www.furuno.es

FURUNO DANMARK AS

Hvidovre, Denmark
www.furuno.dk

FURUNO NORGE A/S

Ålesund, Norway
www.furuno.no

FURUNO SVERIGE AB

Västra Frölunda, Sweden
www.furuno.se

FURUNO FINLAND OY

Espoo, Finland
www.furuno.fi

FURUNO POLSKA Sp. z o.o.

Gdynia, Poland
www.furuno.pl

FURUNO EURUS LLC

St. Petersburg, Russian Federation
www.furuno.com.ru

FURUNO DEUTSCHLAND GmbH

Rellingen, Germany
www.furuno.de

FURUNO HELLAS S.A.

Piraeus, Greece

RICO (PTE) LTD

Singapore
www.rico.com.sg

1010-pdf
Catalogue No. M-1545

