SFP experimenter — readable connected mapping

Seven functional sheets; all components, pins and physical remaps preserved.

2. Power input and 3.3 V regulation

File: connected-power.kicad_sch

3. Host control and pull-up resistors

File: connected-control.kicad_sch

4. LVDS transmit and receive

File: connected-lvds.kicad_sch

5. SFP supply filtering

File: connected-filters.kicad_sch

6. TX fault and loss-of-signal indicators

File: connected-status.kicad_sch

7. Decoupling and mechanical features

File: connected-decoupling.kicad_sch

8. SFP electrical and cage contact map

File: connected-sfp.kicad_sch

Cross-sheet net key and physical-contact remaps: net-map.csv / pin-map.csv.


CC-BY-SA, same as source. sysmocom (2018/2019); KiCad port shabaz (2024).

Sheet: /
File: sfp-connected.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 9.0.2		Id: 1/8

Power input and 3.3 V regulation

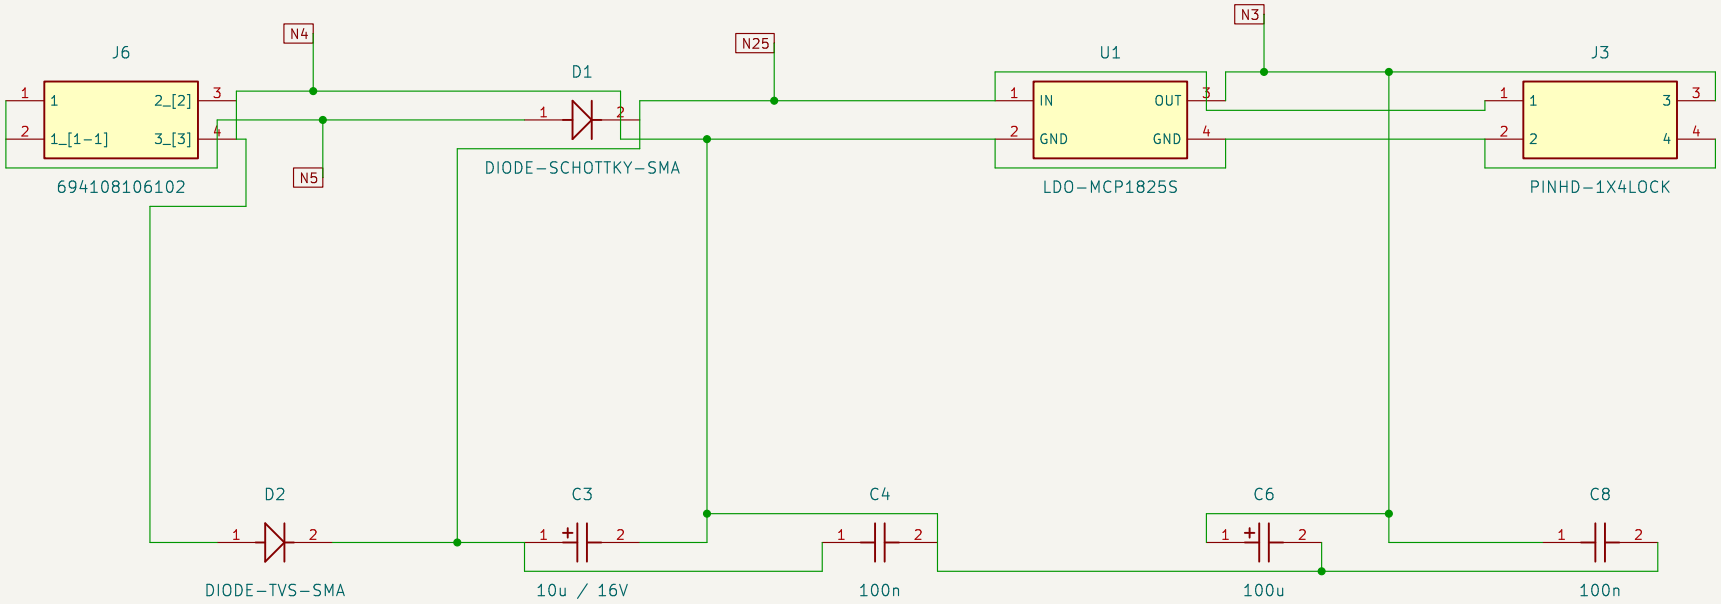


N3: 3.3 V | N4: GND | N5: DC jack input | N25: Protected DC input

Dots join wires; undotted crossings are separate. N interfaces connect across sheets.

Sheet: /2. Power input and 3.3 V regulation/		
File: connected-power.kicad_sch		
Title: Power input and 3.3 V regulation		
Size: A4	Date:	**Rev: 2**
KiCad E.D.A. 9.0.2		Id: 2/8

Host control and pull-up resistors

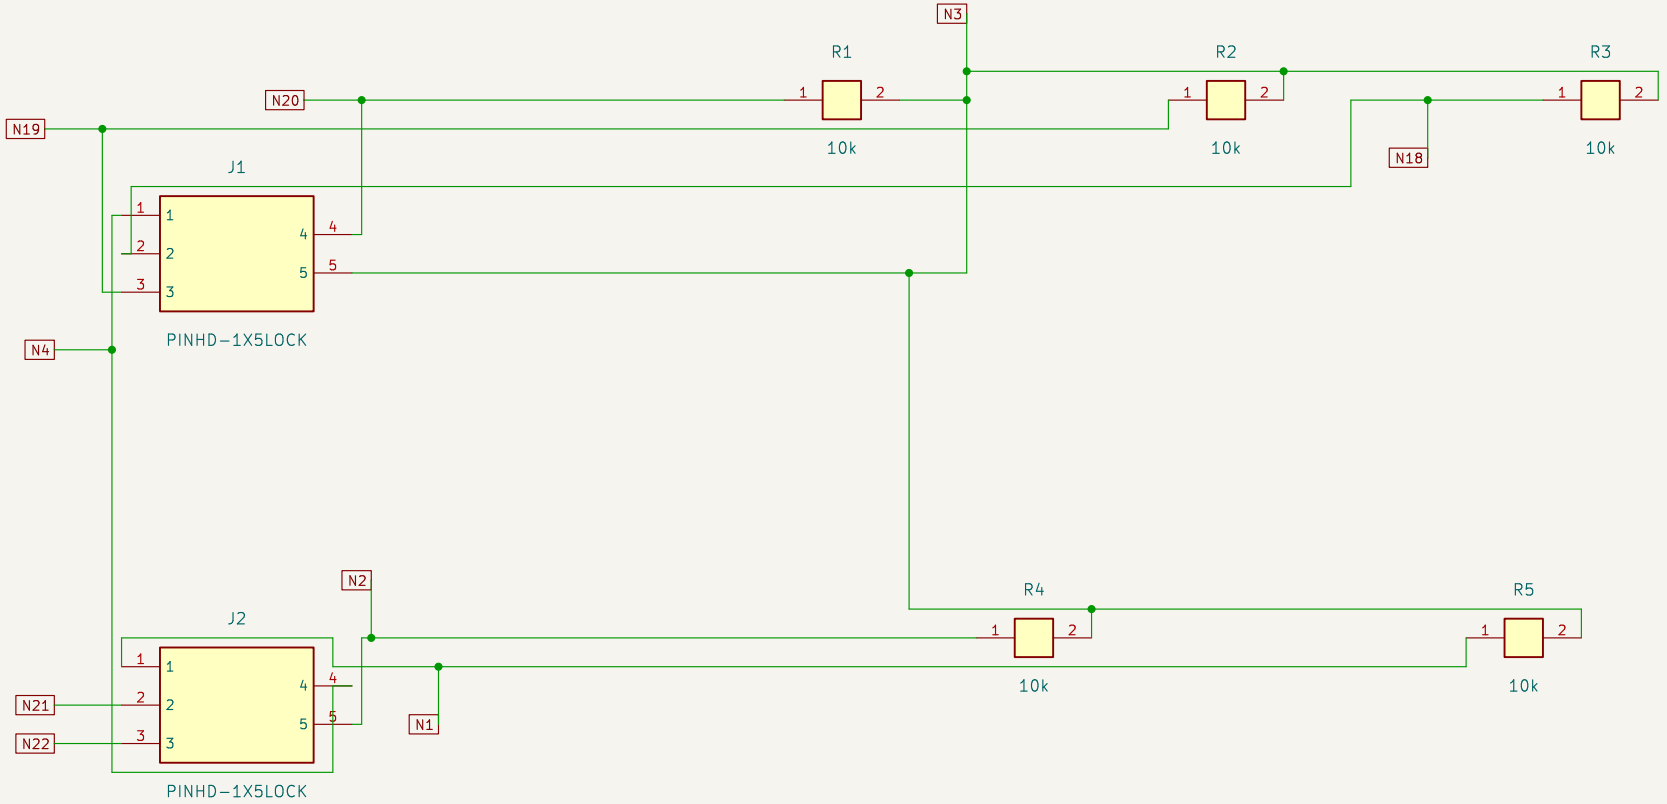


N1: LOS | N2: TX_FAULT | N3: 3.3 V | N4: GND | N18: MOD_DEF0

N19: SCL | N20: SDA | N21: RATE_SEL | N22: TX_DISABLE

Dots join wires; undotted crossings are separate. N interfaces connect across sheets.

Sheet: /3. Host control and pull-up resistors/		
File: connected-control.kicad_sch		
Title: Host control and pull-up resistors		
Size: A4	Date:	**Rev: 2**
KiCad E.D.A. 9.0.2		Id: 3/8

LVDS transmit and receive

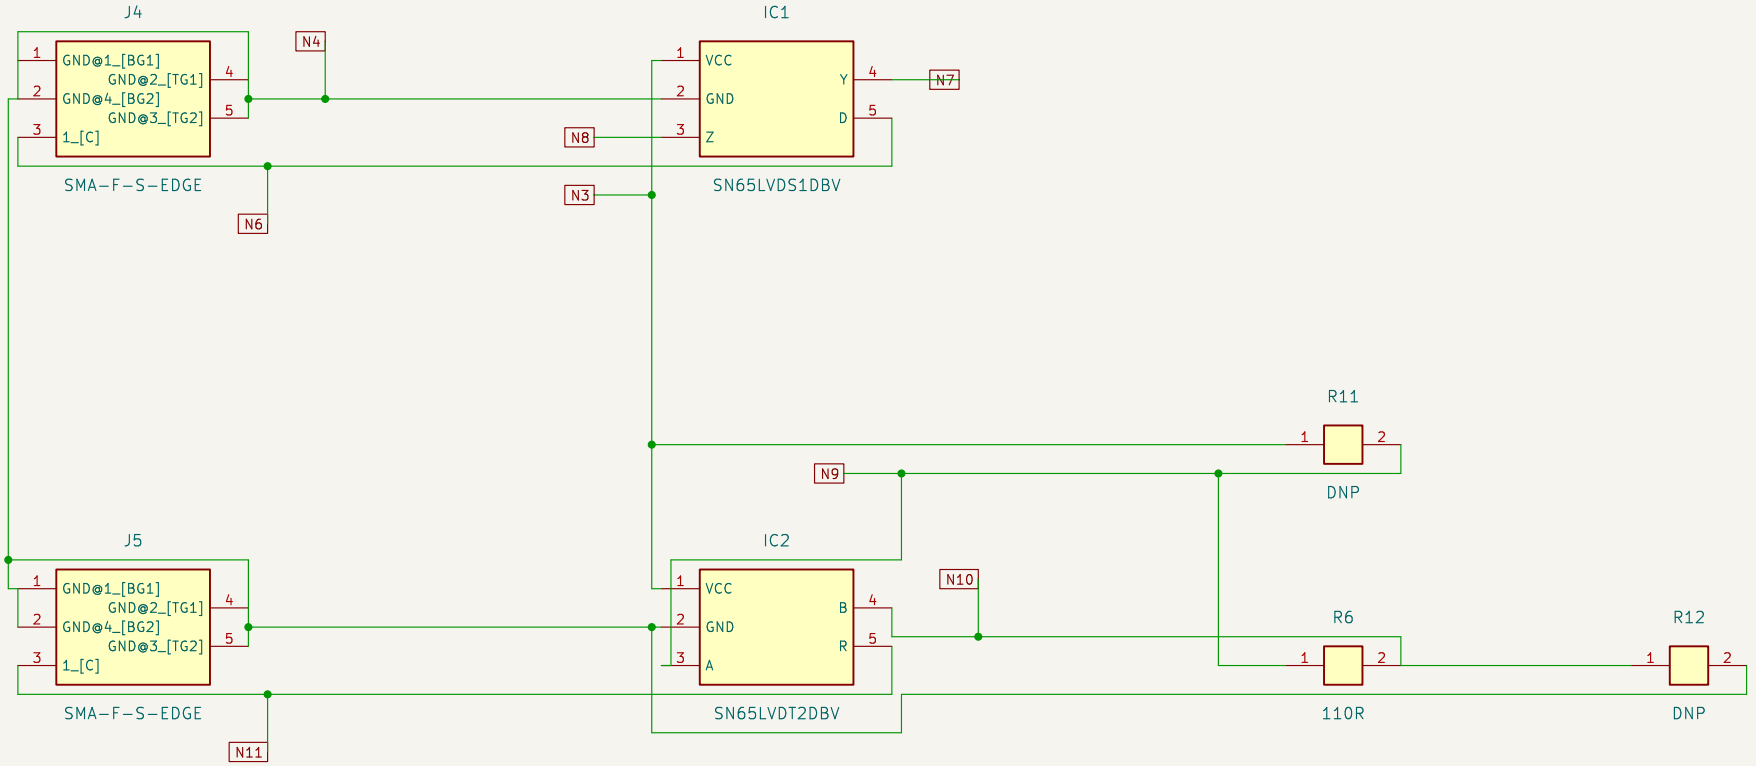

N3: 3.3 V | N4: GND | N6: TX input | N7: TD+ | N8: TD-

N9: RD+ | N10: RD- | N11: RX output


Dots join wires; undotted crossings are separate. N interfaces connect across sheets.

Sheet: /4. LVDS transmit and receive/
File: connected-lvds.kicad_sch

Title: LVDS transmit and receive

Size: A4	Date:	Rev: 2
KiCad E.D.A. 9.0.2		Id: 4/8

SFP supply filtering

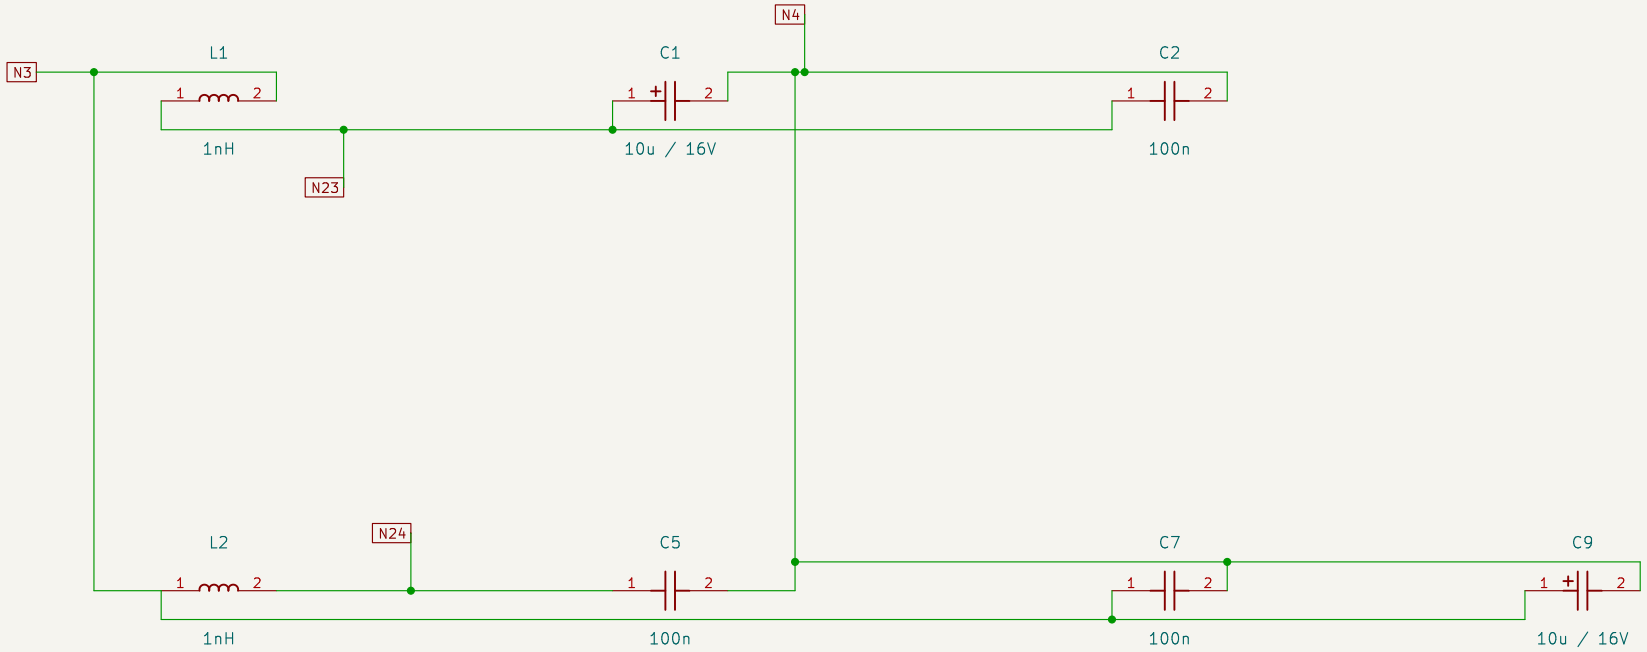

N3: 3.3 V | N4: GND | N23: VCCR | N24: VCCT


Dots join wires; undotted crossings are separate. N interfaces connect across sheets.

Sheet: /5. SFP supply filtering/
File: connected-filters.kicad_sch

Title: SFP supply filtering

Size: A4	Date:	Rev: 2
KiCad E.D.A. 9.0.2		Id: 5/8

TX fault and loss-of-signal indicators

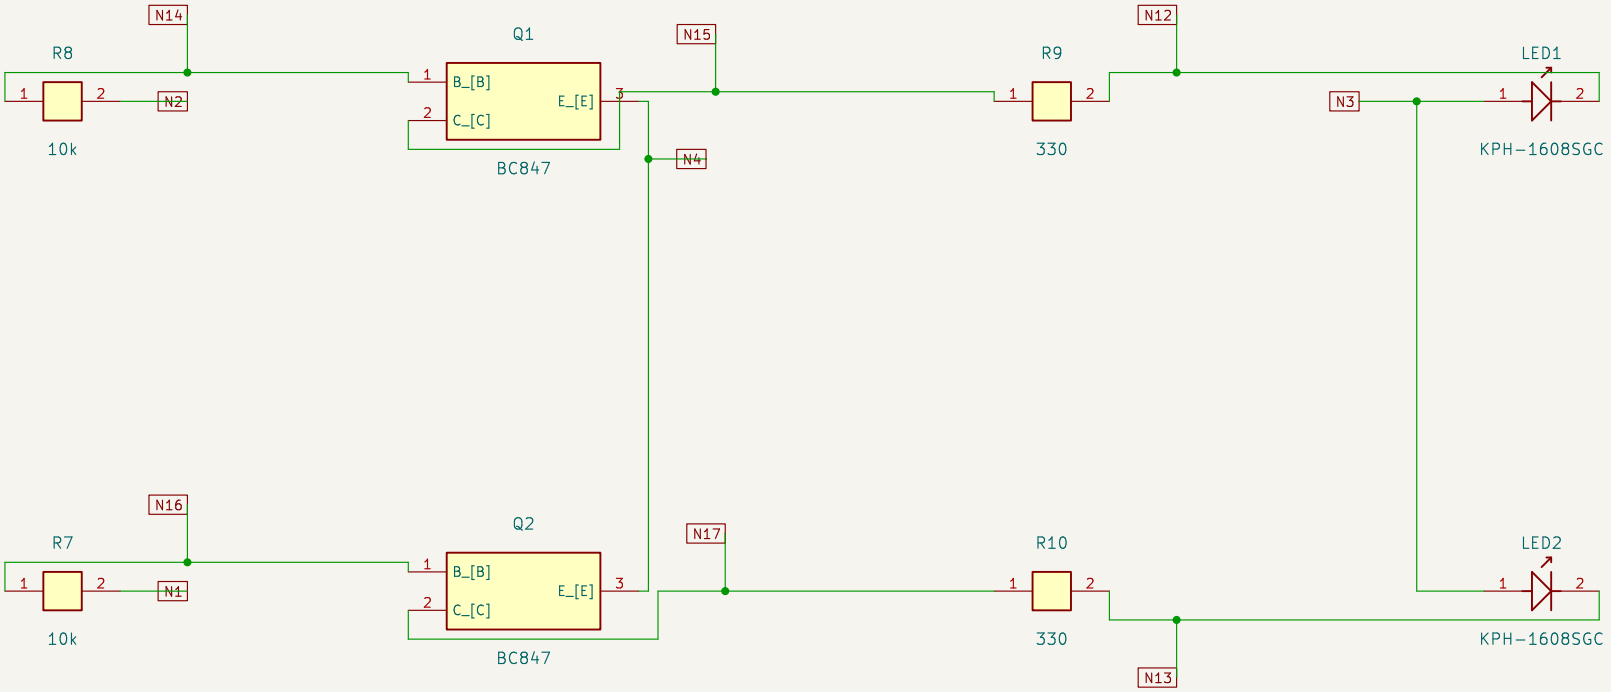

N1: LOS | N2: TX_FAULT | N3: 3.3 V | N4: GND | N12: Fault LED cathode

N13: LOS LED cathode | N14: Fault transistor base | N15: Fault transistor collector | N16: LOS transistor base | N17: LOS transistor collector


Dots join wires; undotted crossings are separate. N interfaces connect across sheets.

Sheet: /6. TX fault and loss-of-signal indicators/
File: connected-status.kicad_sch

Title: TX fault and loss-of-signal indicators

Size: A4	Date:	Rev: 2
KiCad E.D.A. 9.0.2		Id: 6/8

Decoupling and mechanical features

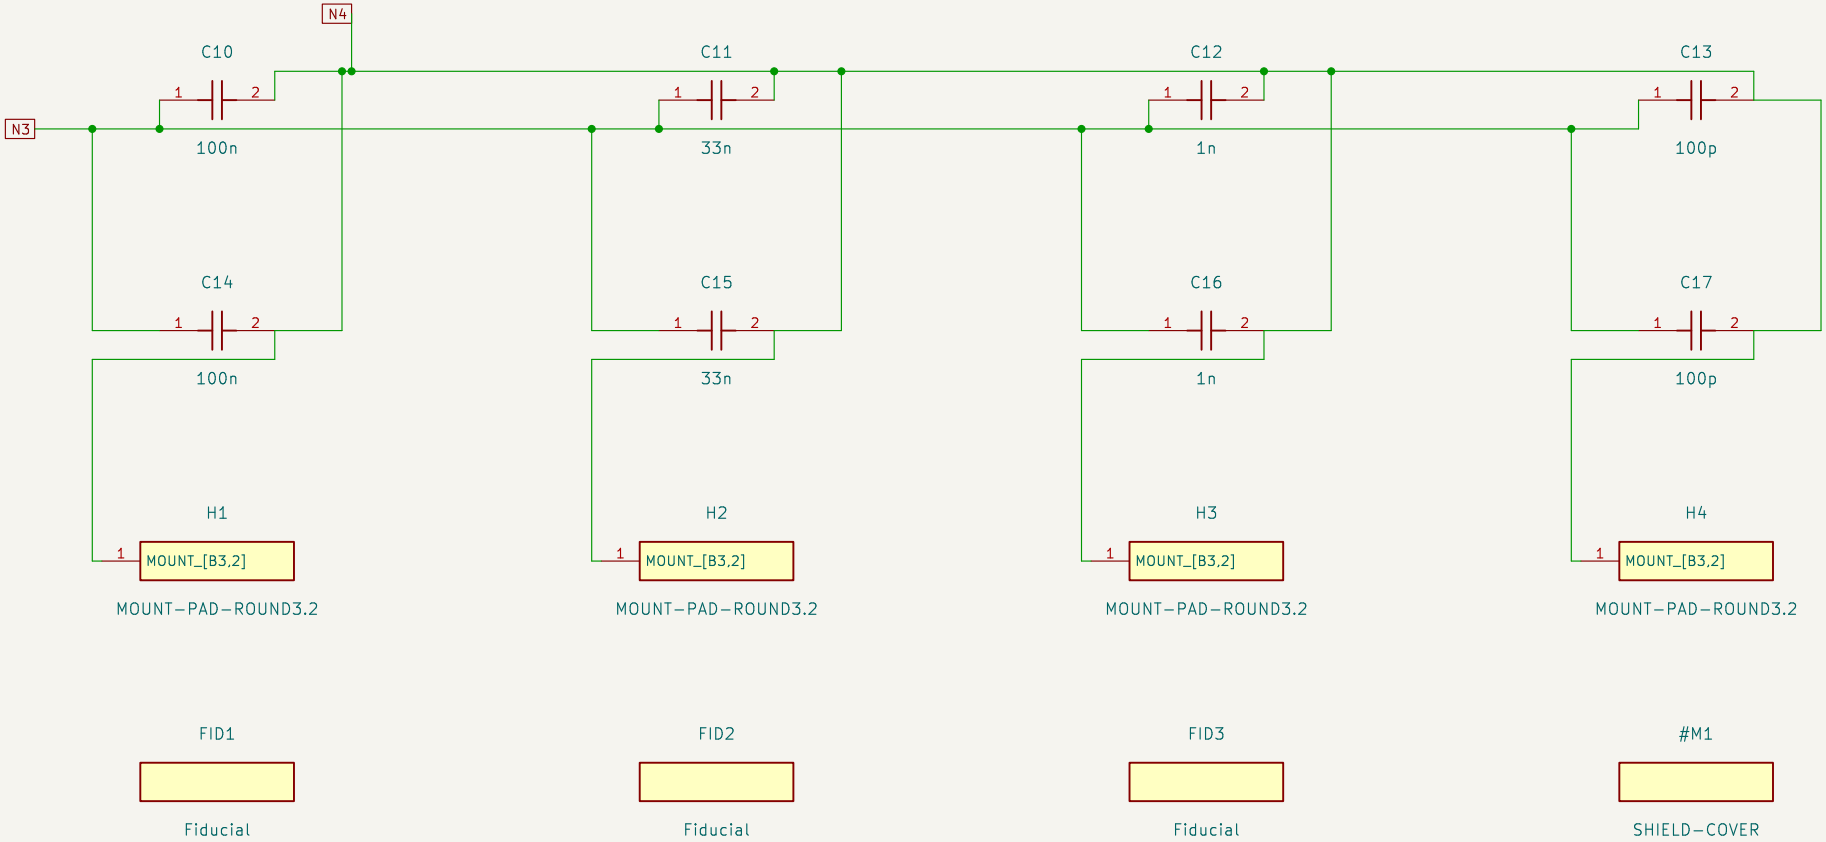

N3: 3.3 V | N4: GND

#M1: mechanical shield / GND intent only; source graphic has no electrical pin.

Dots join wires; undotted crossings are separate. N interfaces connect across sheets.


Sheet: /7. Decoupling and mechanical features/
File: connected-decoupling.kicad_sch

Title: Decoupling and mechanical features

Size: A4 | Date: | **Rev: 2**

KiCad E.D.A. 9.0.2 | Id: 7/8

SFP electrical and cage contact map

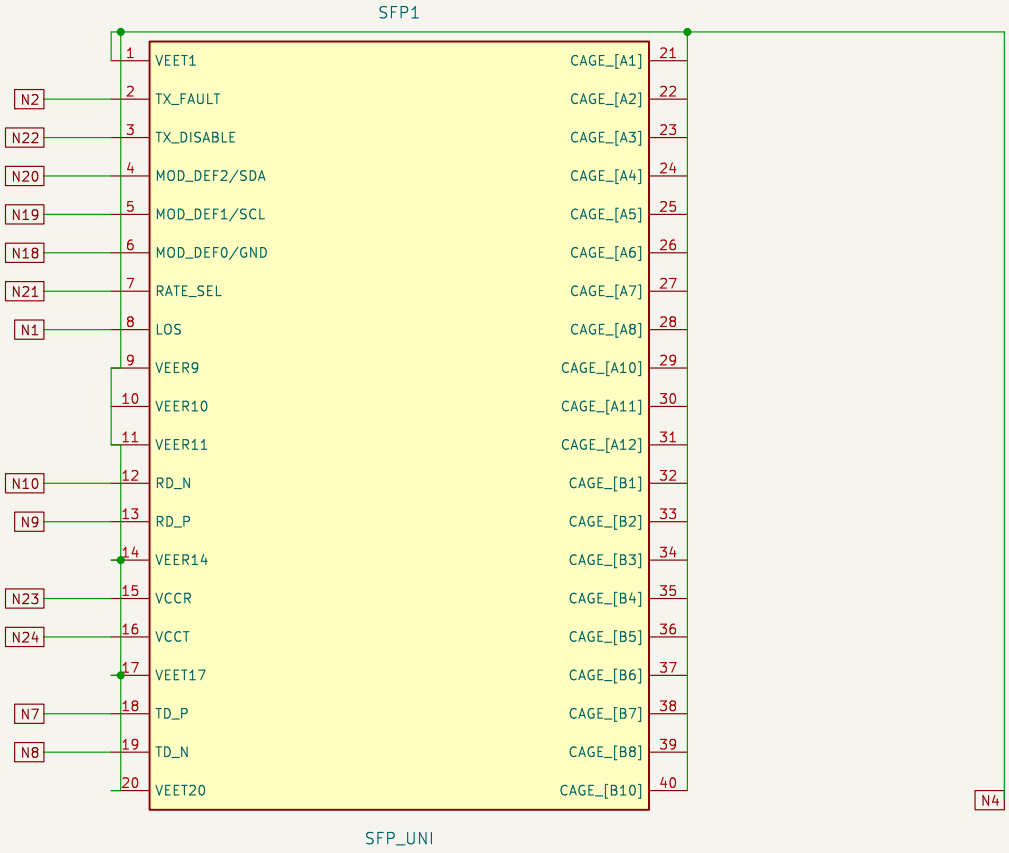

N1: LOS | N2: TX_FAULT | N4: GND | N7: TD+ | N8: TD−

N9: RD+ | N10: RD− | N18: MOD_DEF0 | N19: SCL | N20: SDA

N21: RATE_SEL | N22: TX_DISABLE | N23: VCCR | N24: VCCT

Dots join wires; undotted crossings are separate. N interfaces connect across sheets.

Sheet: /8. SFP electrical and cage contact map/
File: connected−sfp.kicad_sch

Title: SFP electrical and cage contact map

Size: A4	Date:	**Rev: 2**
KiCad E.D.A. 9.0.2		Id: 8/8