

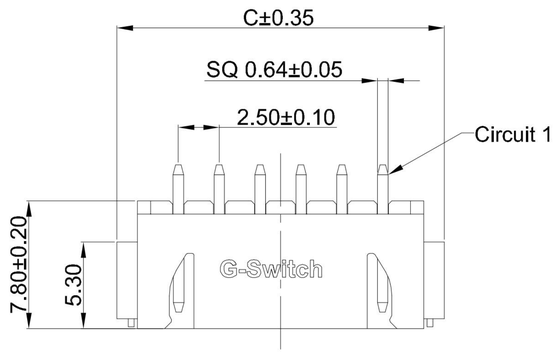

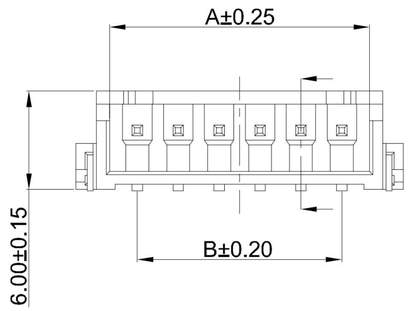



SECTION A-A



## G-Switch Specification:

1.Current rated: 3.0A AC/DC
2.Voltage rating: 250V AC/DC
3.Withstanding voltage: 1000V AC
4.Contact resistance: 10mΩ max.
5.Insulation resistance: 1000MΩ min
6.Durability cycle: 30Cycles
7.Removal force: 1.50kgf/Pin min
8.Operating temperature range: -25°C ~ +85°C




GT-A2501 W R S-1 XX X XX 01

**G-Switch**

**Series No**

**Connector**
W-Wafer

**Angle**
R-90°


**Termipoint**
S-SMT

**Terminal Plating**
BT-Bright Tin


**Housing Colour**
S-Nature

**Pin Q' PY**
02~16


**Row NO**
1-Single row

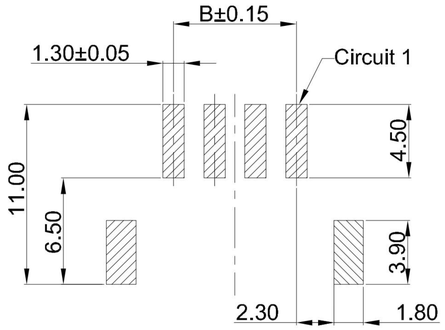


RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05




PCB LAYOUT

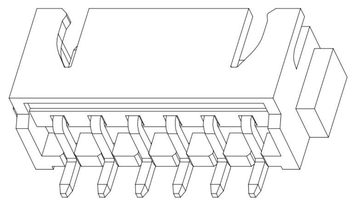

**Ordering Information:**

| Circuit | Dimensions(mm) | | | Circuit | Dimensions(mm) | | |
|---|---|---|---|---|---|---|---|
| | A | B | C | | A | B | C |
| 02 | 5.90 | --- | 10.00 | 10 | 25.90 | 22.50 | 30.00 |
| 03 | 8.40 | 5.00 | 12.50 | 11 | 28.40 | 25.00 | 32.50 |
| 04 | 10.90 | 7.50 | 15.00 | 12 | 30.90 | 27.50 | 35.00 |
| 05 | 13.40 | 10.00 | 17.50 | 13 | 33.40 | 30.00 | 37.50 |
| 06 | 15.90 | 12.50 | 20.00 | 14 | 35.90 | 32.50 | 40.00 |
| 07 | 18.40 | 15.00 | 22.50 | 15 | 38.40 | 35.00 | 42.50 |
| 08 | 20.90 | 17.50 | 25.00 | 16 | 40.90 | 37.50 | 45.00 |
| 09 | 23.40 | 20.00 | 27.50 | --- | --- | --- | --- |

| NO. | PART NAME | MATERIAL | REMARK |
|---|---|---|---|
| 4 | SOLDER TABS | PHOSPHOR BRONZE | BRIGHT Tin |
| 3 | PIN MATERIAL | BRASS | BRIGHT Tin |
| 2 | CAP | LCP,94V-0 | NATURE |
| 1 | HOUSING | LCP,94V-0 | NATURE |

Pb Process Capable | RoHS Compliant EU RoHS Standards | HALOGEN Compliant Halogen Free

SCALE: 1:1 | UNIT: mm
SIZE: A4

Unless otherwise General Tolerance:

| | |
|---|---|
| X | ±0.40 |
| X.x | ±0.30 |
| X.xx | ±0.20 |
| X° | ±5° |
| X.x° | ±3° |

Title: Wafer Pitch 2.50mm 90° XH SMT Type Connector

Molde Code: GT-A2501WRS-1XXXXX01

| DRAWN | CHECKED | APPROVED | DATE |
|---|---|---|---|
| Hu | Hu | Chen | 2022.12.28 |

品赞科技 G-Switch www.dg-switch.com

REV: A0 | SHEET: 1/1