

MODEL HIPA01044545

1.8-4.2GHz Broadband Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 1.8-4.2GHz
- Gain: 45dB
- Output Power Psat: 46dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	1.8-4.2			GHz
Small Signal Gain	45	50		dB
Gain Flatness		± 1.5	± 2	dB
Input VSWR		1.4	2.0	
Output VSWR		1.3	2.0	
Output Power for 1 dB Compression (P1dB)	44	45		dBm
Saturated Output Power (Psat)	45			dBm
Non-Harmonic Spurious		60		dBc
Output third order intercept point		50		dBm
Input Max Power(no damage)			6	dBm
NF		10		dB
DC Current (Vcc=+28~30V) (@Pout=30W)		2000	3500	mA
Efficiency @ Pout=30W	40% typ			
TTL control	Enable: TTL "High" Disable: TTL "Low"			
Impedance	50			Ω
Input Output Connector	SMA-k/SMA-K			
Material	Aluminum			
Function	Over Current & Over temperature protection			
Package Sealing	General Sealing (Standard)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +65^{\circ}\text{C}$
- ※ Storage Temperature $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

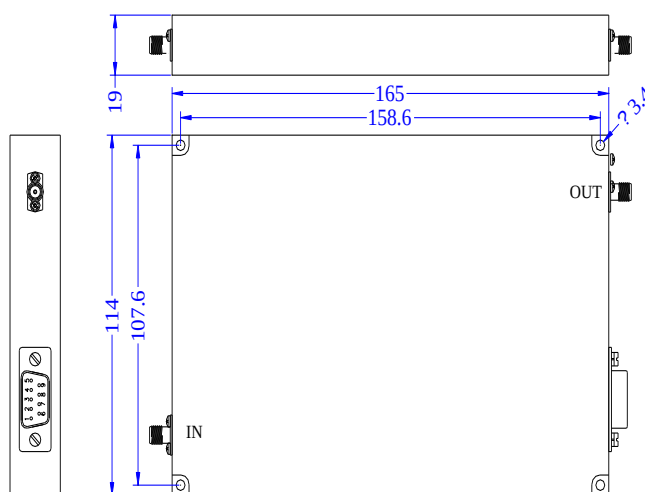

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****