


MODEL HIPA01182525

1-18GHz Broadband Amplifier

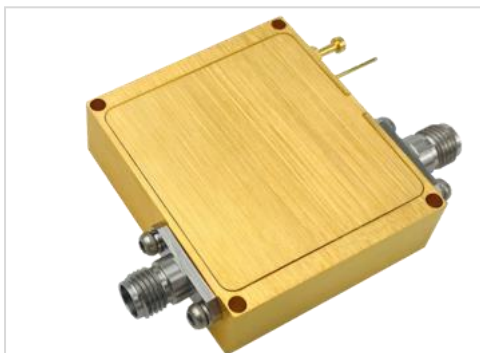

Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 1-18GHz
- Gain: 25dB
- Output Power: 25dBm
- High Output IP3: 35dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	1-18			GHz
Gain	20	25		dB
Gain Flatness		± 3		dB
Input VSWR		1.5	2.0	
Output VSWR		1.8	2.0	
Output Power for 1 dB	23	24		dBm
Saturated Output Power (Psat)		25		dBm
Noise Figure		5		dB
Second Harmonic		-15	-13	dBc
Spurious		-60		dBc
OIP3		40		
Input Max Power(no damage)			10	dBm
DC Current (Vcc=+12V)		500		mA
Impedance	50			Ω
Input Output Connector	SMA-k/SMA-K			
Material	Aluminum/Conductive oxide			
Weight	50g			
Package Sealing	General Sealing (Standard); Hermetically Seal(Optional)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

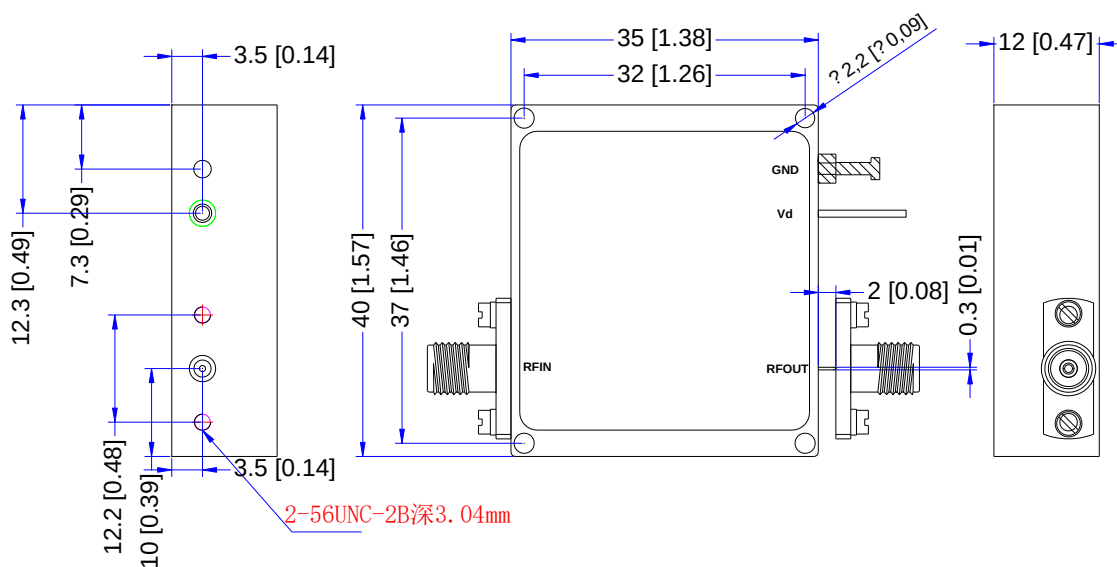

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****