

# MODEL HIPA01184024

## 1-18GHz Broadband Power Amplifier



### ■ Features

- Ultra Wide Band: 1-18GHz
- Gain: 40dB
- Output Power: 24dBm
- High Output IP3: 32dBm

### ■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

### □ Electrical Specifications

| Parameter                     | Min.                                                       | Typ.    | Max       | Units    |
|-------------------------------|------------------------------------------------------------|---------|-----------|----------|
| Frequency Range               | 1-18                                                       |         |           | GHz      |
| Gain                          | 38                                                         | 40      |           | dB       |
| Gain Flatness                 |                                                            | $\pm 2$ | $\pm 2.5$ | dB       |
| Input VSWR                    |                                                            | 1.5     | 2.0       | -        |
| Output VSWR                   |                                                            | 1.8     | 2.0       | -        |
| Output Power for 1 dB         | 22                                                         | 23      |           | dBm      |
| Saturated Output Power (Psat) |                                                            | 24      |           | dBm      |
| Noise Figure                  |                                                            | 2.3     | 2.8       | dB       |
| Spurious                      |                                                            | -60     |           | dBc      |
| OIP3                          |                                                            | 32      |           | -        |
| Input Max Power(no damage)    |                                                            |         | -10       | dBm      |
| DC Current (Vcc=+12V)         |                                                            | 500     |           | mA       |
| Impedance                     | 50                                                         |         |           | $\Omega$ |
| Input Output Connector        | SMA-Female/SMA-Female                                      |         |           |          |
| Material /Finishing           | Aluminum/Gold Paint                                        |         |           |          |
| Weight                        | 50g                                                        |         |           |          |
| Package Sealing               | General Sealing (Standard);<br>Hermetically Seal(Optional) |         |           |          |

### Environmental Conditions

#### Environmental Specifications:


- ※ Operational Temperature       $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature             $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE  
PRECAUTIONS ELECTROSTATIC  
SENSITIVE DEVICES

### Outline Drawing

All Dimensions in mm (inches) Tolerance  $\pm 0.25$  (0.01)

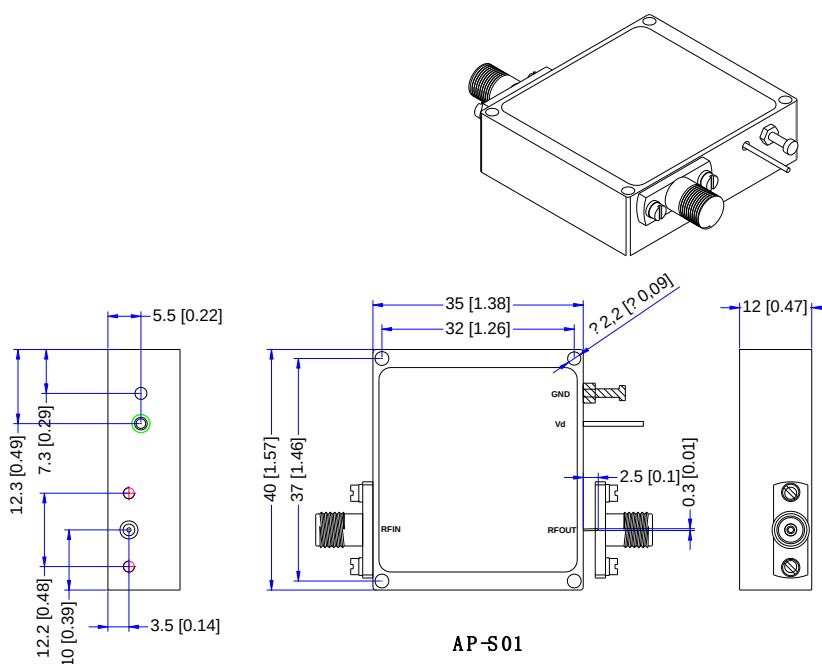

#### NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

**\*\*\*Heat Sink required during operation\*\*\***