

MODEL HIPA01403030AC

1-40GHz Power Amplifier



■ Features

- Ultra Wide Band: 1-40GHz
- Gain: 30dB
- Output Power P-1: 30dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	1-40			GHz
Small Signal Gain		30		dB
Gain Flatness		± 3		dB
Input VSWR		1.5	3	-
Output VSWR		2.0	3	-
Output Power for 1 dB Compression (P1dB)		30		dBm
Saturated Output Power (Psat)		31		dBm
Input Max Power(no damage)			+20	dBm
Internally Generated Spurious		-60		dBc
Noise Figure		13		dB
OIP3		37		dBm
AC	110~240/47-63Hz/120mA			
Current (DC) (@Pout= 1W)		1.8		A
Impedance	50			Ω
Input/ Output Connector	2.92 mm -k			
Material	Aluminum			
Dimension	64mmx173mmx178mm			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

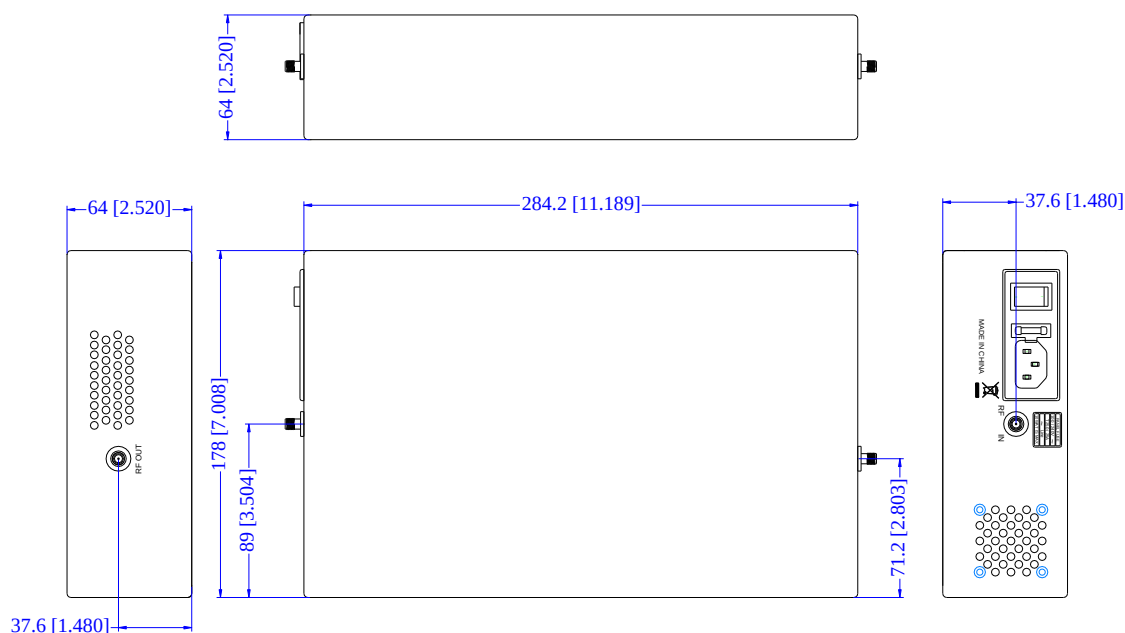

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HIMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

■ Performance Plot

