

MODEL HIPA02025547

2.4-2.5GHz 50W Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 2.4-2.5GHz
- Gain: 48dB
- Output Power Psat: 47dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	2.4-2.5			GHz
Small Signal Gain	48	55		dB
Gain Flatness		± 0.75		dB
Input VSWR/output VSWR		2.0		-
Output Power for 1 dB Compression (P1dB)		45		dBm
Saturated Output Power (Psat)		47		dBm
Input Max Power(no damage)			5	dBm
Output Protection	Output protection using internal circulator and load (can operate in full open or short without damage).			
Internally Generated Spurious		-60		dBc
IP3	56			dBm
Cooling fan and heat sink	Desired			
Class of Operation	A/AB			
Harmonics	-20dBc @40 Watt			
RF input signal	CW/AM/FM/PM/Pulse			
DC Current (Vcc=+28V) (@Pout=50W)		7	8	A
Impedance	50			Ω
Input Output Connector	SMA/N			
Material	Aluminum			
Dimension	220mmX65mmX40mm			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

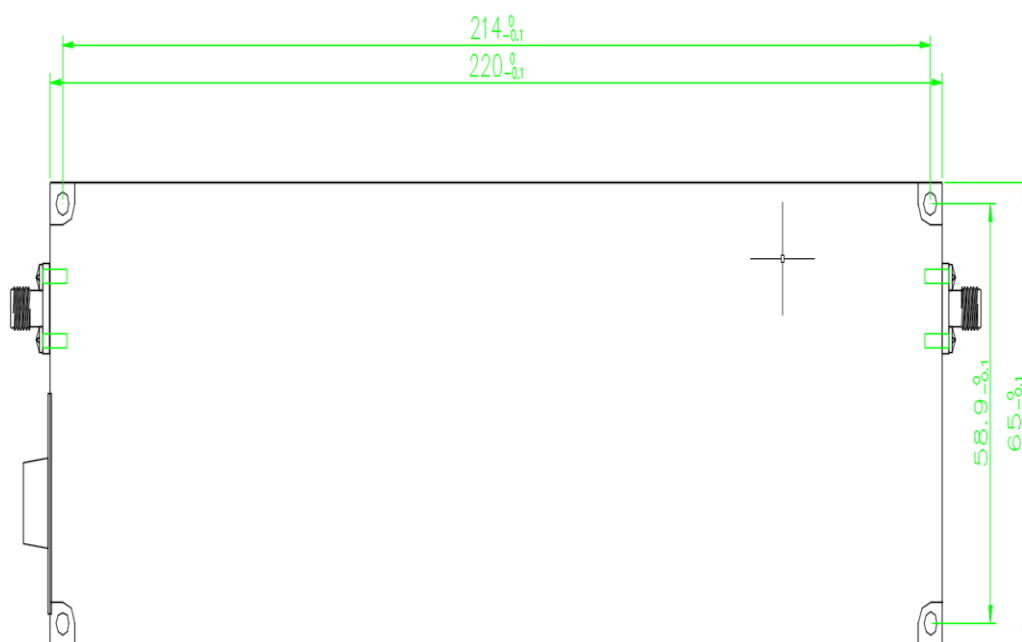

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HIMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****