

MODEL HIPA02065043

2-6GHz Broadband Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 2-6GHz
- Gain: 50dB
- Output Power Psat: 43dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	2-6			GHz
Small Signal Gain	50			dB
Gain Flatness		± 1.25		dB
Input /Output VSWR		1.5	2.0	dB
Saturated Output Power (Psat)	41	43		dBm
Harmonic Rejection		15		dB
Efficiency		30		%
Noise Figure			7	dB
Spurious		-60		dBc
Input Max Power(no damage)			0	dBm
DC Current (Vcc=+28V) (@Pout=20W)		3	5	A
TTL Control	1:Off; 0:ON			
Impedance	50			Ω
Input Output Connector	SMA-k/SMA-K			
Material	Aluminum			
Package Sealing	General Sealing (Standard)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$
- ※ Storage Temperature $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

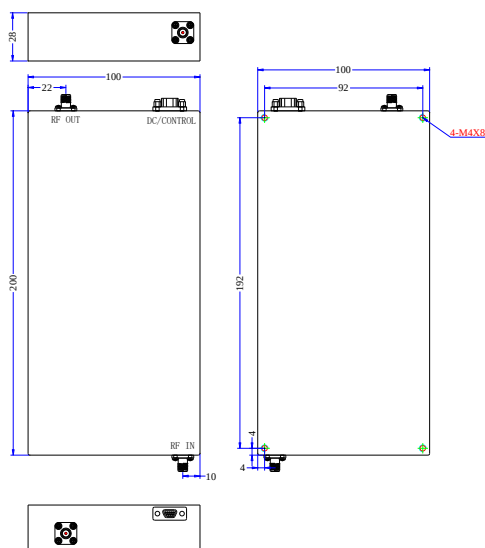

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****