

MODEL HIPA02065348

2-6GHz Broadband Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 2-6GHz
- Gain: 55dB
- Output Power Psat: 49dBm
- Bias: Vd=28V;Id=12A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	2-6			GHz
Small Signal Gain	50	53		dB
Power Gain Flatness		± 3	± 4	dB
Input /Output VSWR		1.5	2.0	-
Output Power for 1 dB Compression (P1dB)		50		W
Saturated Output Power (Psat)	75			W
Input Max Power(no damage)			10	dBm
Internally Generated Spurious	-60			dBc
Noise Power Density (-40 dBm/MHz)			-40	dBm
Harmonics		12		dBc
Spurious Non-harmonics	-60			dBc
DC Current (Vcc=+28V) (@Pout75W)		10	13	A
Impedance	50			Ω
TTL Control "Low"/"High"	Low: Enable / High: Disable			
Control Connector DB9	Pin: 1,2,3 VD; 4 TTL, 5 6 NC;7,8,9 GND			
Input Output Connector	SMA-k/SMA-K			
Material	Aluminium			
Weight	1000g			
Dimension	300X190X19mm			

Environmental Conditions

Environmental Specifications:


※ Operational Temperature	-25°C~+70°C
※ Storage Temperature	-55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

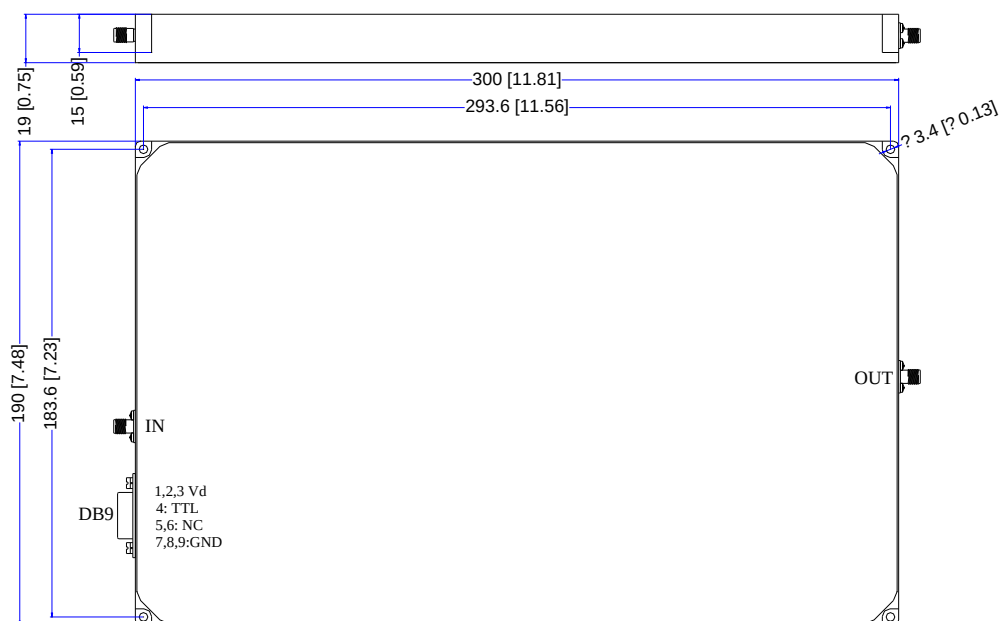


NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.


*****Heat Sink required during operation*****

Typical Performance

Gain vs. Pout

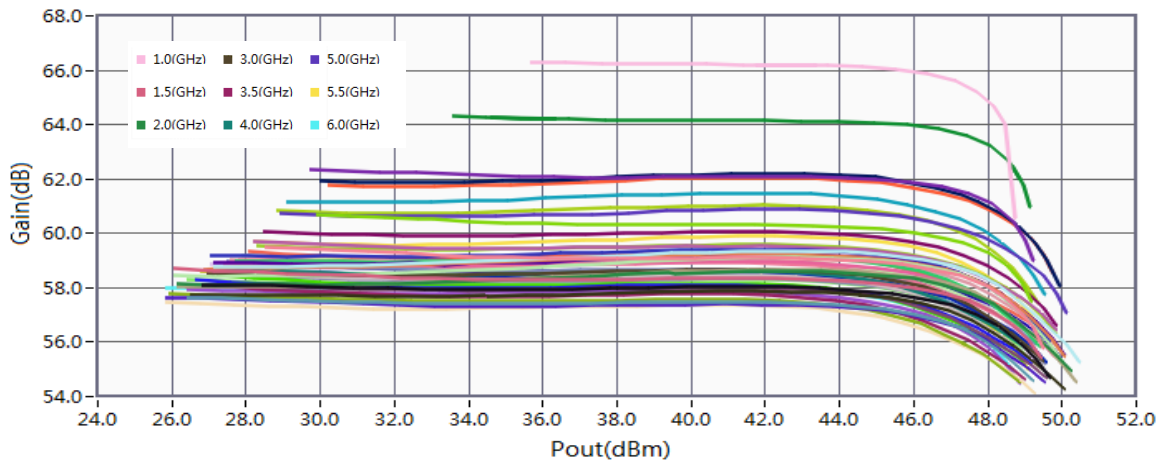

P1dB vs. Frequency

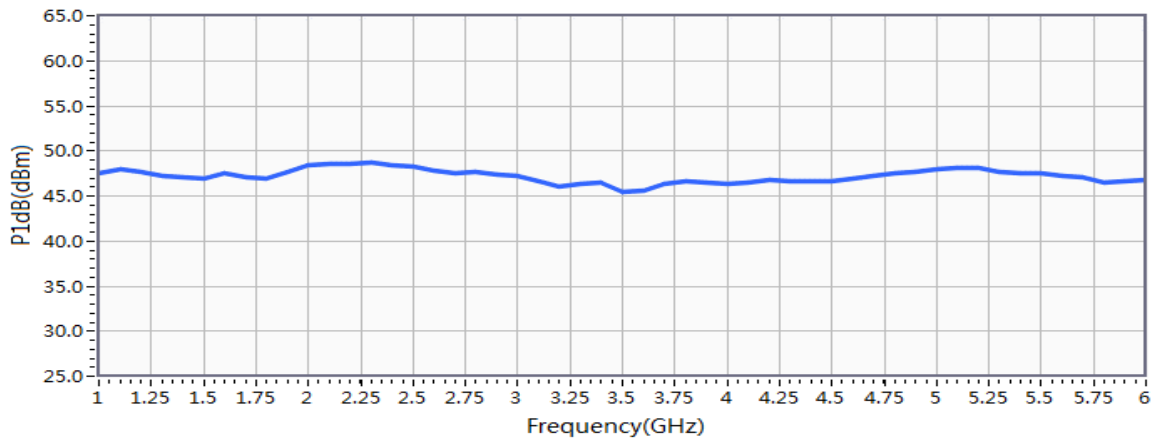

P3dB vs. Frequency

