

MODEL HIPA05056048

5.17-5.25GHz Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 5.17-5.25GHz
- Gain: 60dB
- Output Power Psat: 48dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	5.17-5.25			GHz
Small Signal Gain	59	60		dB
Gain Flatness		± 1	± 1.5	dB
Input VSWR		1.5	2.0	dB
Output Power for 1 dB Compression (P1dB)	47	47.5		dBm
Saturated Output Power (Psat)		48		dBm
Harmonic Rejection	13	15		dB
Input Max Power(no damage)			5	dBm
DC Current (Vcc=+28~30V) (@Pout=50W)		4000	5000	mA
Impedance	50			Ω
Input Output Connector	SMA-k/SMA-K			
Material	Aluminum			
Weight	700g			
Package Sealing	General Sealing (Standard)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

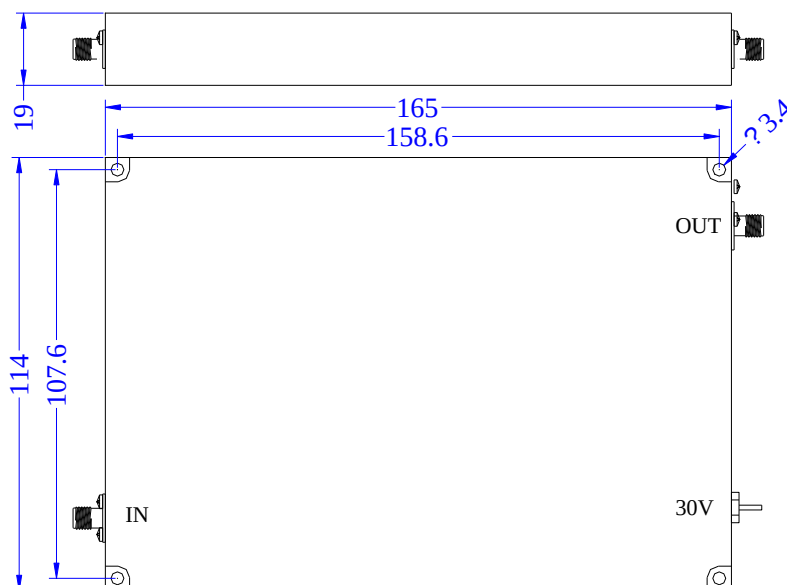

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****

Performance Plot

