

MODEL HIPA05065350

5.6-5.9GHz Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 5.6-5.9GHz
- Gain: 53dB
- Output Power Psat: 50dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	5.6-5.9			GHz
Small Signal Gain	50	53		dB
Power Gain Flatness		± 0.5	± 1	dB
Input /Output VSWR		1.5	2.0	-
Output Power for 1 dB Compression (P1dB)	45	47		dBm
Saturated Output Power (Psat)	50			dBm
Input Max Power(no damage)			10	dBm
Internally Generated Spurious	-60			dBc
2-Tone Intermodulation (IMD) 40dBm/Tone, $\Delta = 1$ MHz		-30		dBc
Harmonics		-20		dBc
Spurious Non-harmonics	-60			dBc
DC Current (Vcc=+28V) (@Pout=100W)		10	13	A
Impedance	50			Ω
TTL Control "Low"/"High"	Low: Enable / High: Disable			
Control Connector DB9	Pin: 1,2,3 VD; 4 TTL, 5 Power detection;7,8,9 GND			
Input Output Connector	SMA-k/SMA-K			
Material	Aluminum			
Weight	1500g			
Dimension	300X220X70mm With Heatsink and Fan			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

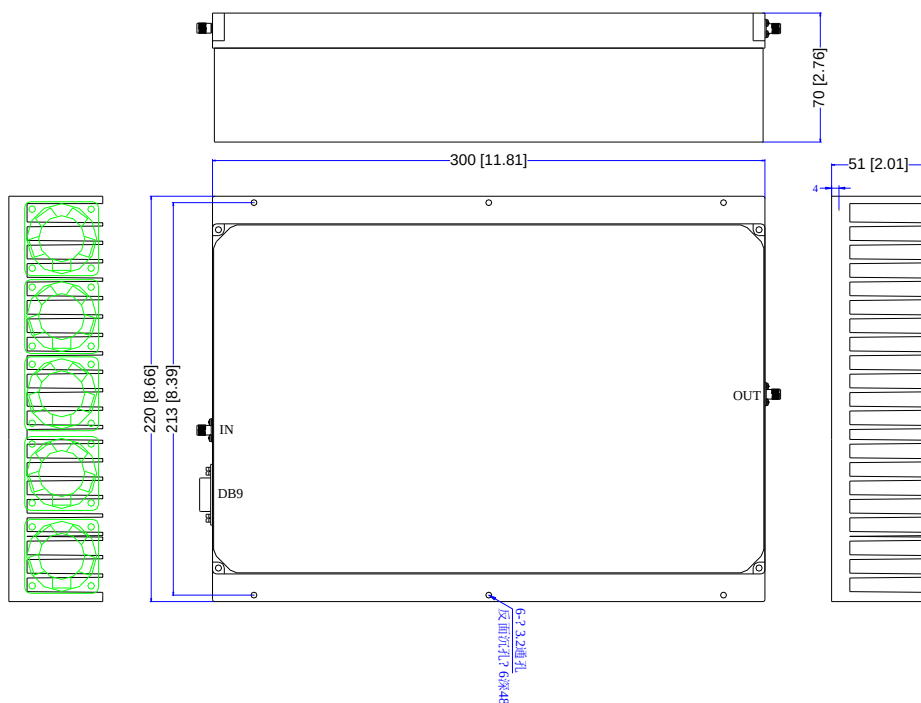

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****