


MODEL HIPA06185550AC

6-18GHz Broadband Power Amplifier



■ Features

- Ultra Wide Band: 6-18GHz
- Gain: 60dB
- Output Power Psat: 50dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	6-18			GHz
Small Signal Gain	55	58		dB
Gain Flatness		±2.5		dB
Input VSWR		2.0		-
Output Power for 1 dB Compression (P1dB)		47		dBm
Saturated Output Power (Psat)	50			dBm
Input Max Power(no damage)			+5	dBm
Noise Power Density (-40 dBm/MHz)			-37	dBm
Internally Generated Spurious		-60		dBc
Impedance	50			Ω
Supply Power	220~240 AC			
Input Output Connector	SMA-K			
Material	Aluminium			
Dimension	5UX19 inches Box			
Note: Over Temperature Protection; VSWR Protection; fan cooling				

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

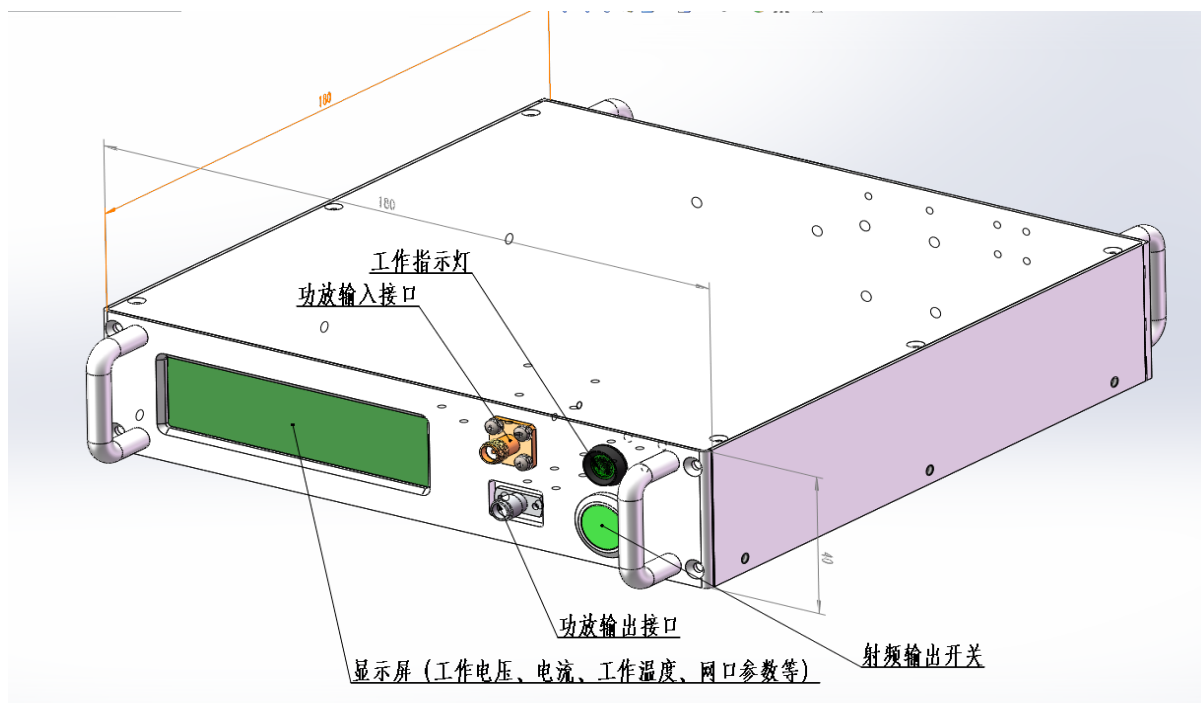

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.