

MODEL HIPA08104040

8-10GHz Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 8-10GHz
- Gain: 36dB
- Output Power Psat: 40dBm
- Bias: Vd=28V; Id=2.5A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	8.0-10			GHz
Small Signal Gain	36	40		dB
Gain Flatness		±1	±2	dB
Gain Variation Over Temperature			±2	dB
Input VSWER		1.5	2.0	-
Output Power for 1 dB Compression (P1dB)		38		dBm
Saturated Output Power (Psat)	40	41		dBm
Harmonic Rejection		15		dB
Input Max Power(no damage)			10	dBm
Internally Generated Spurious		-60		dBc
DC Current (Vcc=+28V) (@Pout=10W)		2	2.5	A
Impedance	50			Ω
Input Output Connector	SMA-k/SMA-K			
Material	Aluminium			
Weight	300g			
Dimension	110mmX80mmX12mm			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

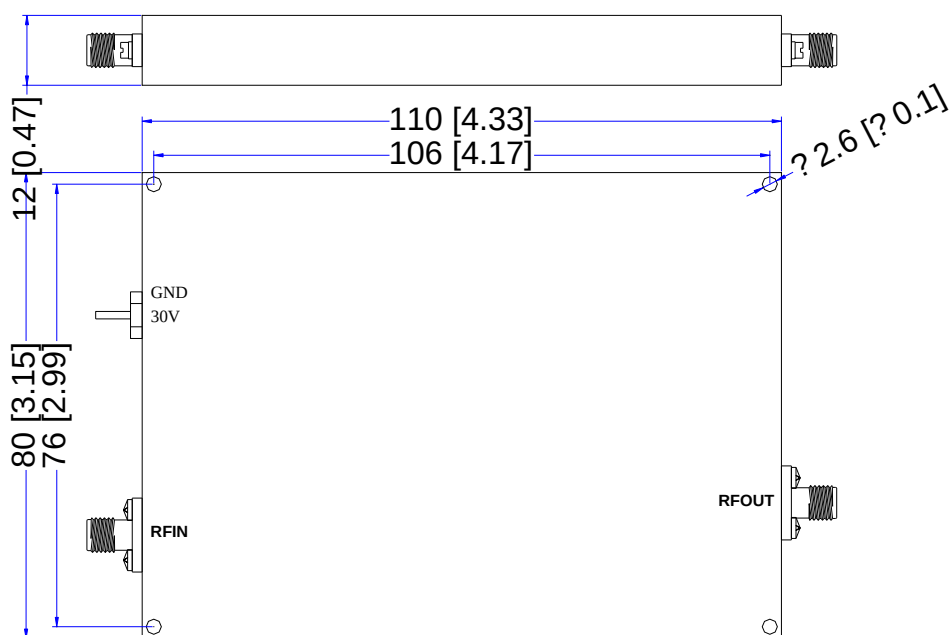

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****