

MODEL HIPA08124047

8-12GHz Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 8-12GHz
- Gain: 45dB
- Output Power Psat: 47dBm
- Bias: Vd=30V;Id=5A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	8-12			GHz
Small Signal Gain	40	45		dB
Gain Flatness		± 1.5	± 2	dB
Input VSWR		1.5	2.0	-
Output Power (CW)	43			dBm
Saturated Output Power (Peak)	46			dBm
NF		8		dB
Spurious		-60		dBc
Input Max Power(no damage)			10	dBm
Internally Generated Spurious		-60		dBc
Control TTL	Enable: TTL "High" Disable: TTL "Low"			
DC Current (Vcc=+30V) (@Pout=40W)		5		A
Function	Over Current & Over temperature protection			
Impedance	50			Ω
Input Output Connector	SMA-k/SMA-K			
Material	Aluminum			
Weight	1000g			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature -25°C~+65°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

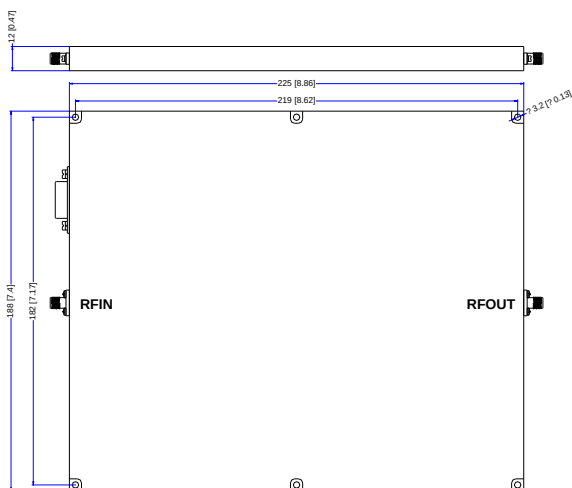

Pin#	Pin Function
1,2	Vdc
3,4	GND
5	Enable: TTL "High" Disable: TTL "Low"
6	VVA Preferable (optional)
7,8,9	NC

NOTE:

- The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
- HIMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****