


MODEL HIPA17433525

17-43GHz Broadband Power Amplifier

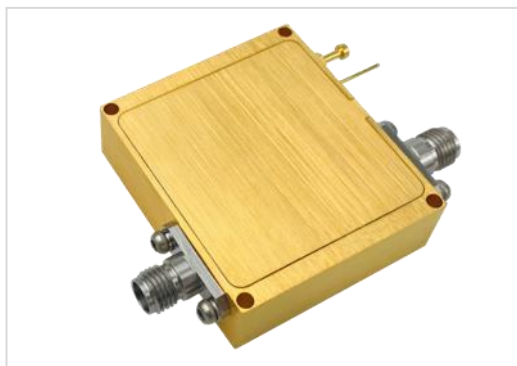

Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 17-43GHz
- Gain: 35dB
- Output Power Psat: 25dBm
- Bias: Vd=12V;Id=0.6A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	17-43			GHz
Small Signal Gain	30	35		dB
Gain Flatness		± 2.5		dB
Input VSWR		2.0		-
Output VSWR		2.0		-
Output Power for 1 dB Compression (P1dB)	23	24		dBm
Saturated Output Power (Psat)		25		dBm
NF		5.5		dB
Input Max Power(no damage)			-5	dBm
DC Current (Vcc=+12V) (@Pout=1.5W)		0.5	0.7	A
Impedance	50			Ω
Input Output Connector	2.92			
Material	Aluminum/Gold Painting			
Weight	200g			
Dimension	40mmX35mmX12mm			
Package Sealing	General Sealing (Standard) Hermetically sealed(Optional)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

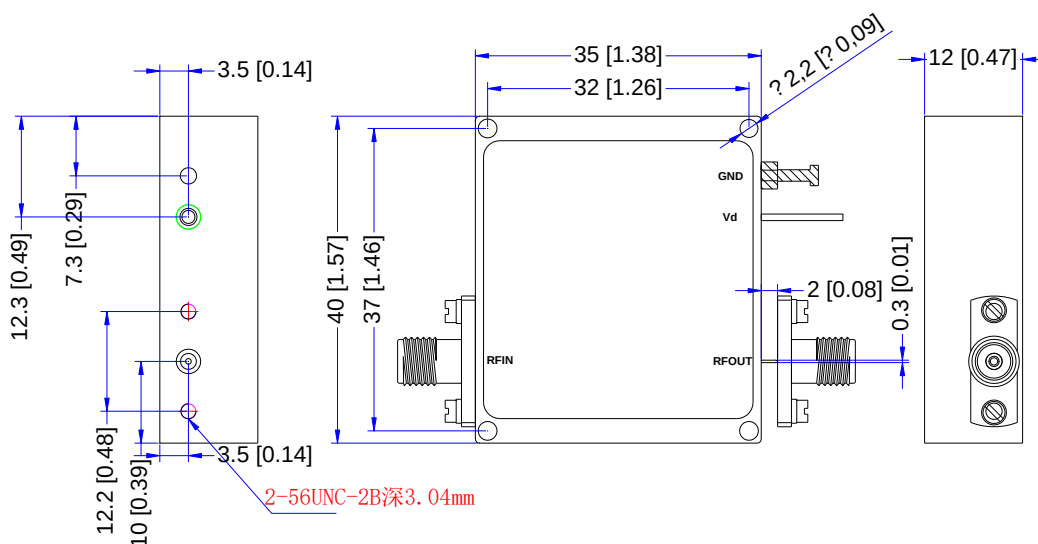


NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.


Heat Sink required during operation

Typical Performance


Gain vs. Frequency

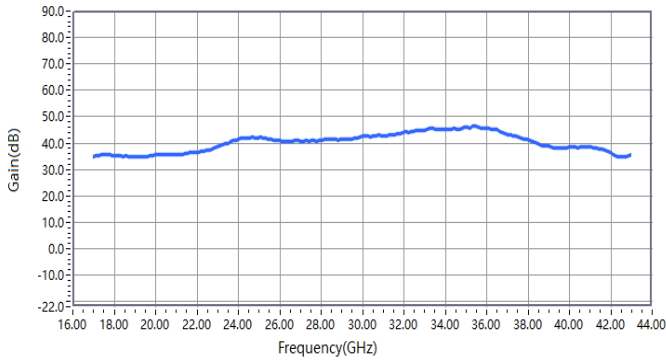


VSWR vs. Frequency(S11)

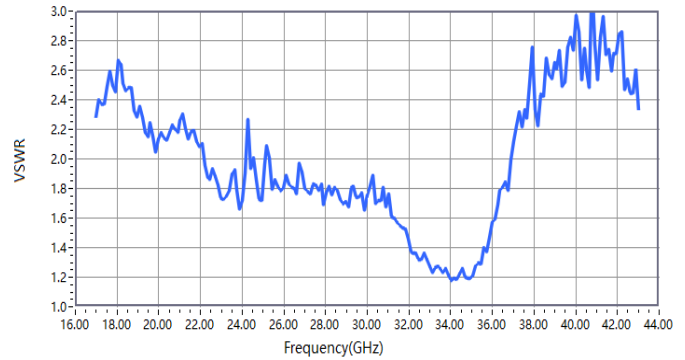


Isolation vs. Frequency

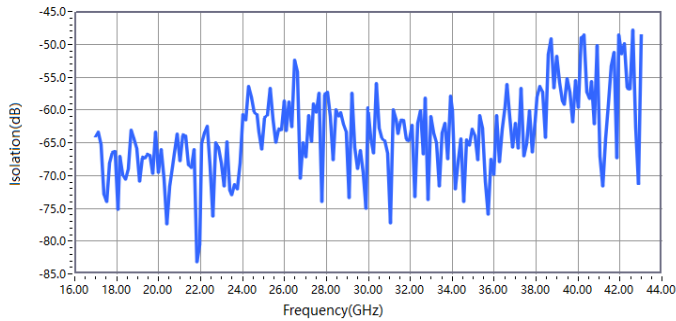



Gain vs. Pout

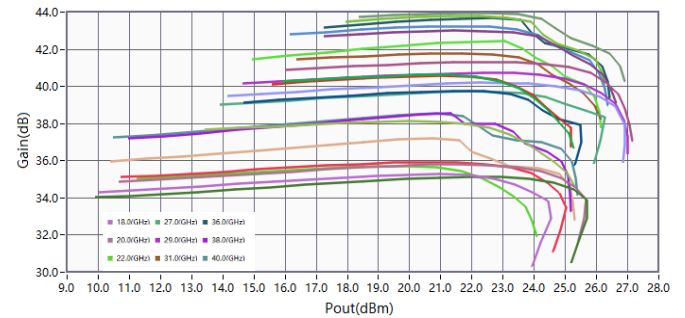

P1dB vs. Frequency

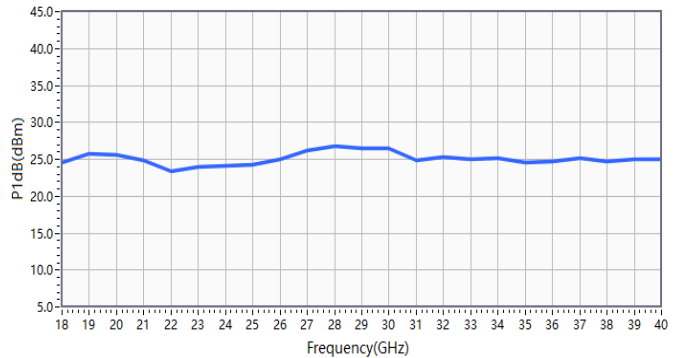

P3dB vs. Frequency

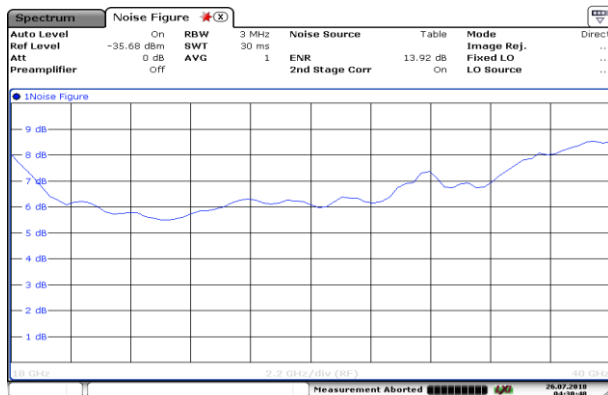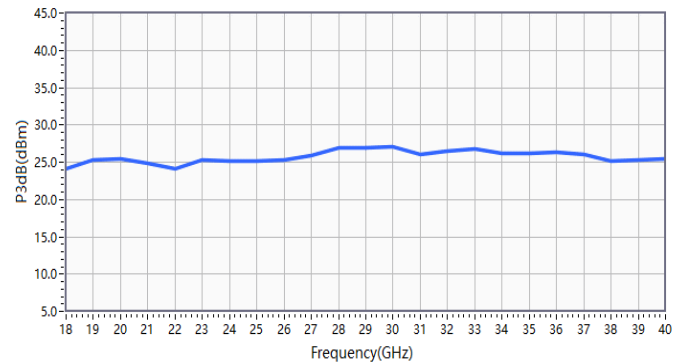

Date: 26 JUL 2018 04:30:48