


MODEL HIPA18253535

18-25GHz Power Amplifier

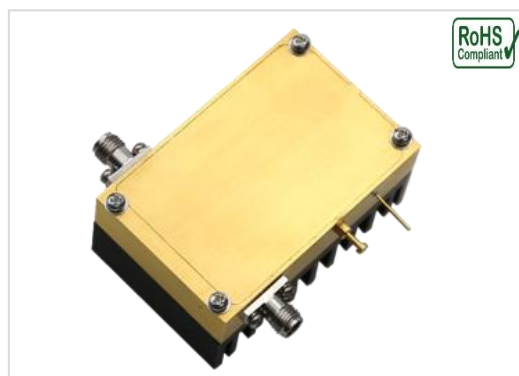

Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 18-25GHz
- Gain: 35dBm
- Output Power Psat: 35dBm
- Bias: Vd=12V;Id=2.3A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	18-25			GHz
Small Signal Gain	35			dB
Gain Flatness		± 1.5	± 2.0	dB
Input VSWR		1.8	2.0	-
Output VSWR		2.0	2.9	-
Output Power for 1 dB Compression (P1dB)	33.5	34		dBm
Saturated Output Power (Psat)	34.5			dBm
Input Max Power(no damage)			10	dBm
DC Current (Vcc=12V) (@Pout=3W)		2.3	3	A
Impedance	50			Ω
Input Output Connector	SMA-K			
Material	Aluminum/Gold Painting			
Dimension	55mmX35mmX12mm			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

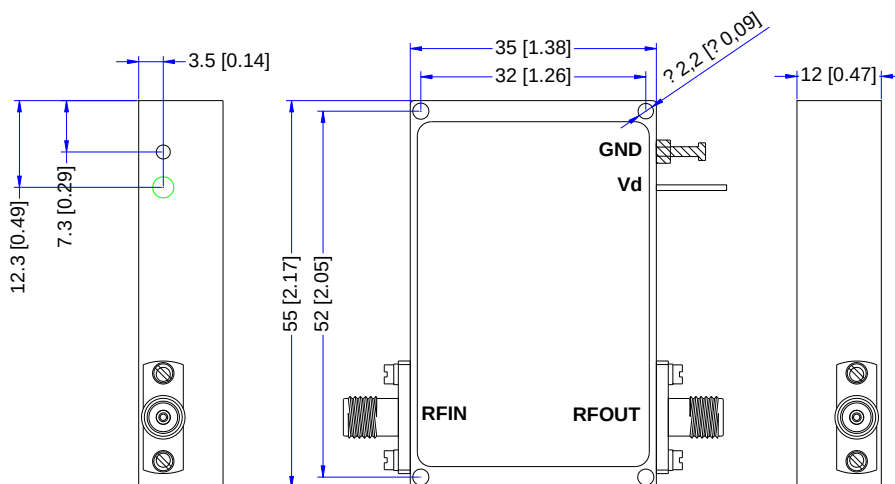

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****

Performance Plot

Gain&Input VSWR&Output VSWR&Isolation

