

MODEL HIPA18402130

18-40GHz Power Amplifier

■ Features

- Ultra Wide Band: 18-40GHz
- Gain: 20dB
- Output Power: 30dBm
- High Output IP3: 42dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules



Note: The photo is for illustration purposes only.
Please refer to outline drawing

□ Electrical Specifications

Parameter	Min.	Typ.	Max.	Units
Frequency Range	18-40			GHz
Gain	18	21		dB
Gain Flatness		±2.5		dB
Gain Variation Over Temperature		±1		dB
Input VSWR		2.0		-
Output VSWR		2.0		-
Output Power for 1 dB Compression (P1dB)	28	30		dBm
Saturated Output Power (Psat)		31		dBm
Input Max Power(no damage)			15	dBm
DC Current (Vcc=+12V)		800	900	mA
Impedance	50			Ω
Input Output Connector	2.92mm-Female			
Material /Finishing	Aluminum/ Gold Plated			
Weight	50g			
Size	50X55X12mm			
Package Sealing	General Sealed(Standard) ; Hermetically Sealed(Optional)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)



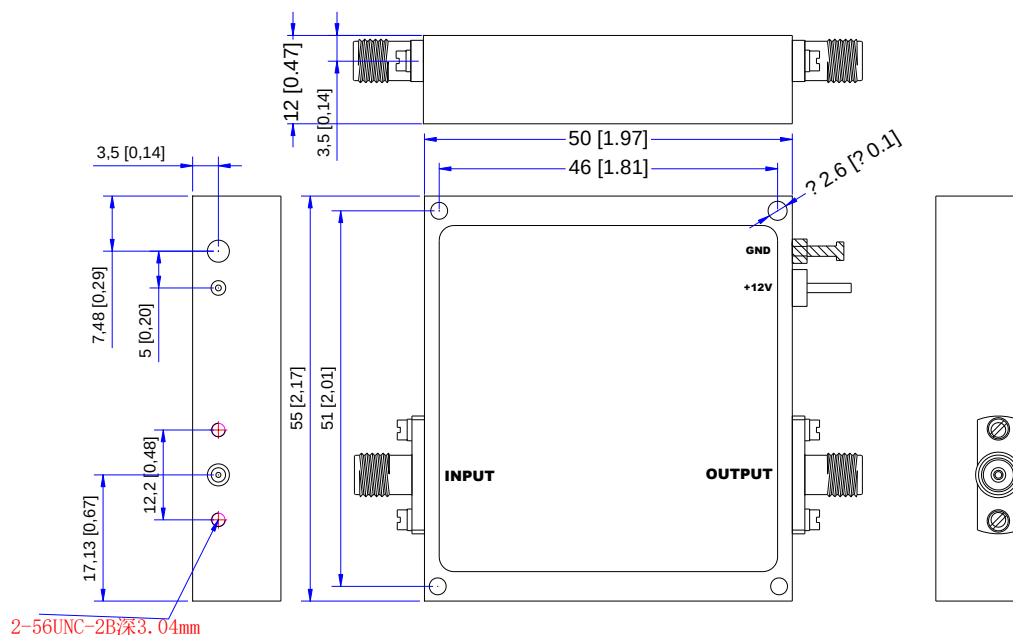


NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****

■ Performance Plot

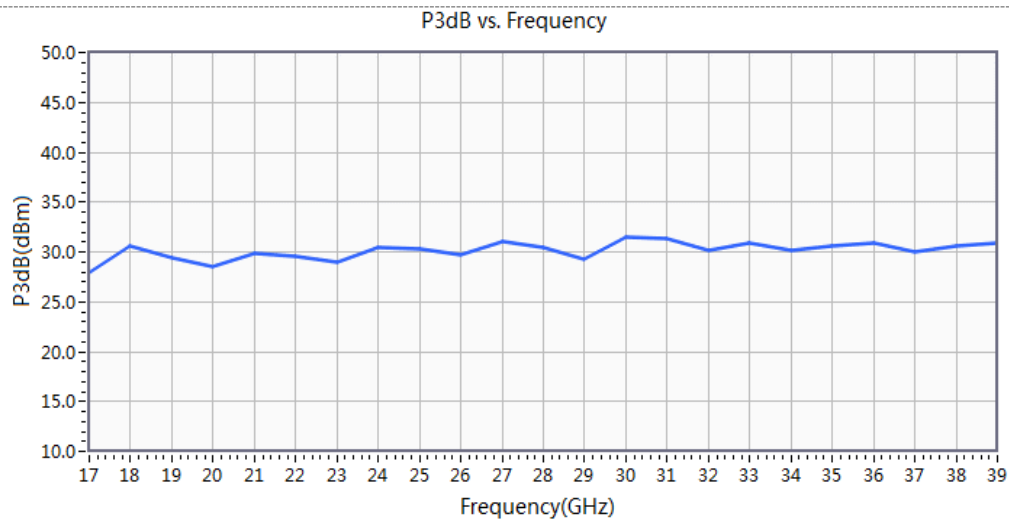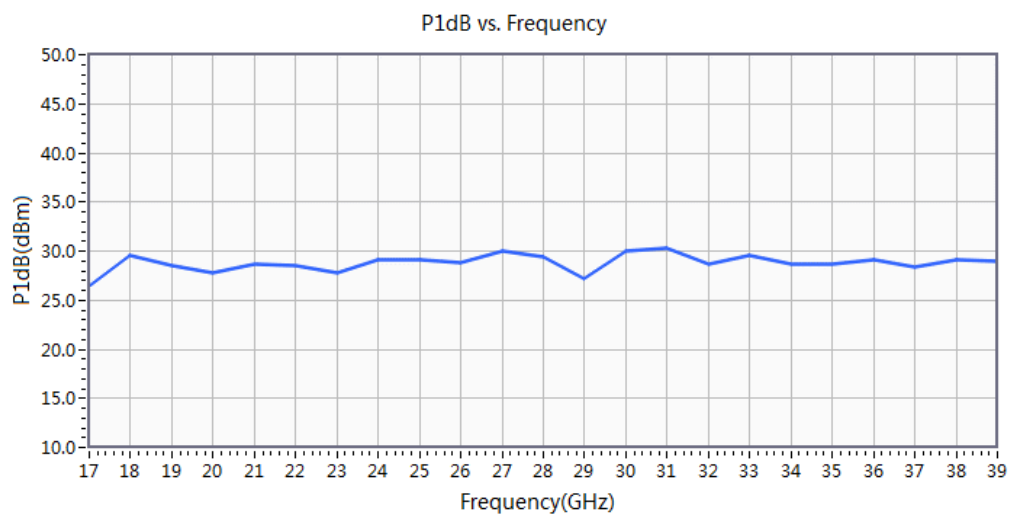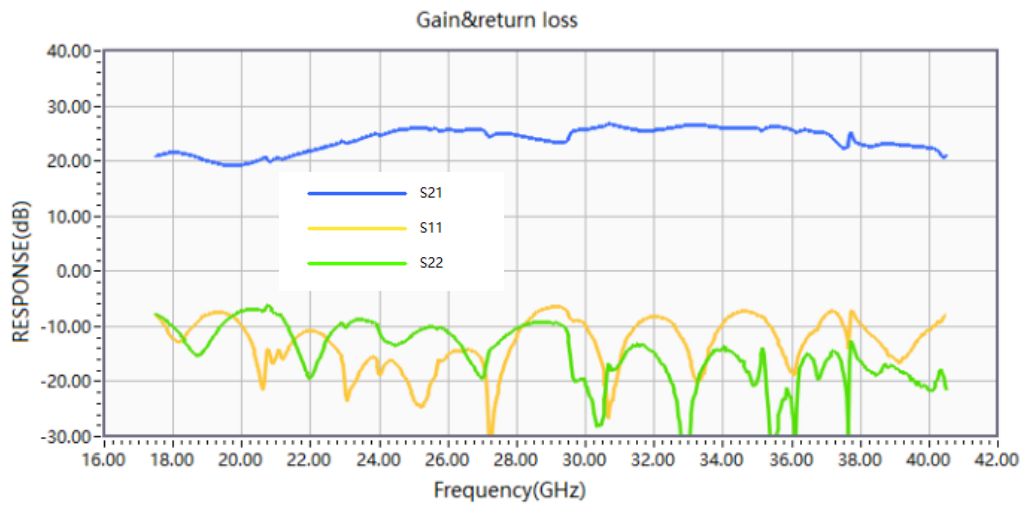

■ Performance Plot

