

MODEL HIPA18402526AC

18-40GHz Power AC Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 18-40GHz
- Gain: 25dB
- Output Power: 26dBm
- High Output IP3: 36dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	18-40			GHz
Gain	20	25		dB
Gain Flatness		± 2	± 3	dB
Input VSWER		1.7	2.5	-
Output VSWR		1.7	2.5	-
Output Power for 1 dB Compression (P1dB)	25	26		dBm
Output Power Past	26			dBm
Output IP3		36		dBm
Input Max Power(no damage)			5	dBm
AC	110~220/50Hz			
Impedance	50			Ω
Input Output Connector	2.92-k			
Material	Aluminum			
Weight	1000g			
Package Sealing	General Sealing (Standard)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

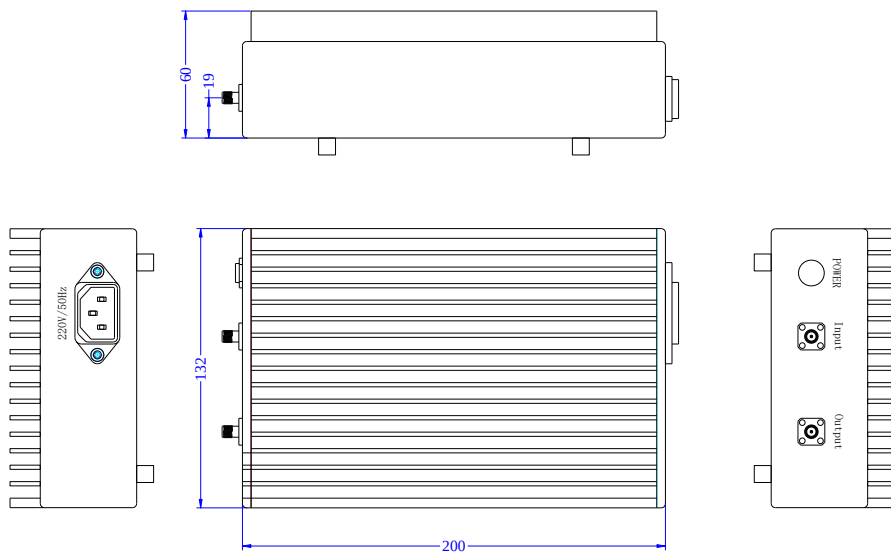

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.