

MODEL HIPA18503527

18-50GHz Low Noise Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 18-50GHz
- Gain: 35dB
- Output Power: 27dBm
- High Output IP3: 30dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	18-50			GHz
Gain	32	35		dB
Gain Flatness		± 1.5	± 2.5	dB
Input VSWR		1.8	2.5	-
Output VSWR		1.8	2.5	-
Output Power for (P1dB)		24		dBm
Output Power Past		27		dBm
Noise Figure		5	6.5	dB
Output IP3		30		dBm
Input Max Power(no damage)			0	dBm
DC Current (Vcc=+12V)		800		mA
Impedance	50			Ω
Input Output Connector	2.4mm-Female			
Material	Aluminium\Gold Plating			
Weight	50g			
Package Sealing	General Sealing (Standard)			

MODEL HIPA18503527
18-50GHz Low Noise Amplifier

□ Environmental Conditions

Environmental Specifcations:

※ Operational Temperature -25°C~+85°C


※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

□ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

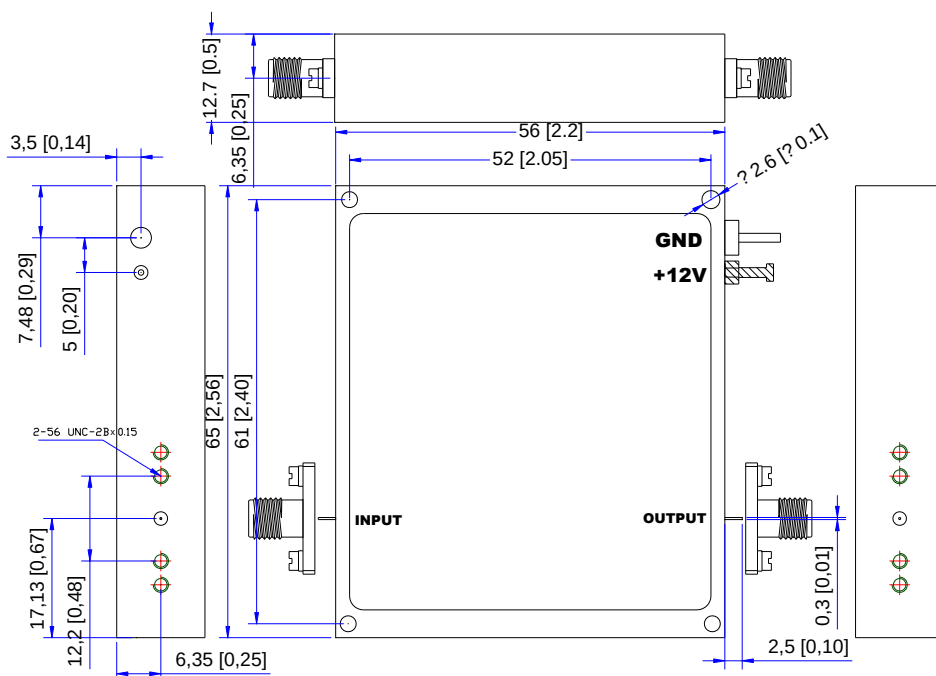

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HIMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

Heat Sink required during operation