

MODEL HIPA23313628

23-31GHz Broadband Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 23-31GHz
- Gain: 36dB
- Output Power Psat: 28dBm
- Bias: Vd=12V;Id=0.5A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	23-31			GHz
Small Signal Gain		36		dB
Gain Flatness		±2.0		dB
Input VSWR		2.0		-
Output VSWR		2.0		-
Output Power for 1 dB Compression (P1dB)		28		dBm
Saturated Output Power (Psat)		29		dBm
Spurious		-60		dBc
Input Max Power(no damage)			5	dBm
DC Current (Vcc=+6~15V)		500	1000	mA
Impedance	50			Ω
Input Output Connector	2.92mm-Female			
Material /Finishing	Aluminum/Gold Painting			
Weight	200g			
Dimension	50mmX45mmX12mm			
Package Sealing	Air Sealing (Laser seal welding)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

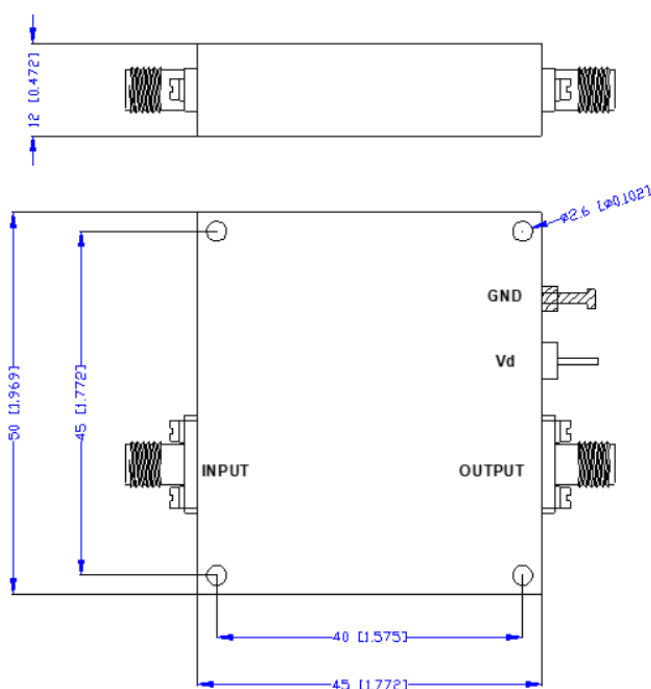

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****

■ Performance Plot

