

MODEL HIPA23315020

23-31GHz Broadband Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 23-31GHz
- Gain: 50dB
- Output Power Psat: 20dBm
- Bias: Vd=12V;Id=0.3A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	23-31			GHz
Small Signal Gain	50			dB
Gain Flatness		± 1.5		dB
Input VSWR		1.8		-
Output VSWER		1.8		-
Output Power for 1 dB Compression (P1dB)		18		dBm
Saturated Output Power (Psat)		20		dBm
NF		4		dB
Input Max Power(no damage)			-20	dBm
DC Current (Vcc=+12V)		300	380	A
Impedance	50			Ω
Input Output Connector	SMA-K			
Material	Aluminum/Gold Painting			
Weight	50g			
Dimension	30X30X8mm			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

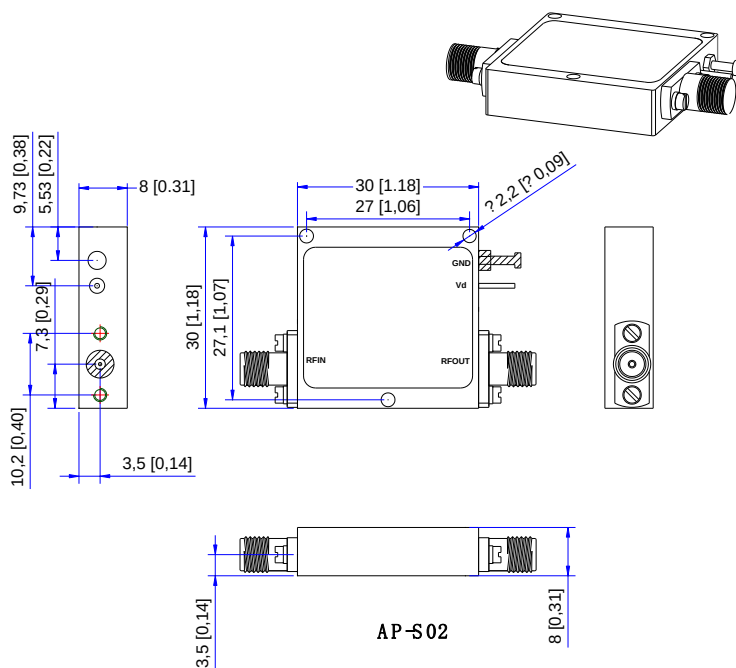

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****