

MODEL HIPA24473026

24-47GHz Broadband Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 24-47GHz
- Gain: 30dB
- Output Power P-1: 25dBm
- Bias: Vd=12V;Id=1A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	24-47			GHz
Small Signal Gain	25	30		dB
Gain Flatness		±2.0		dB
Input VSWR		2.0	2.5	-
Output VSWR		1.8	2.0	-
Output Power for 1 dB Compression (P1dB)	25	26		dBm
Saturated Output Power (Psat)		26		dBm
NF		-		dB
Input Max Power(no damage)			5	dBm
DC Current (Vcc=+12V) (@Pout=0.3W)		0.6	1	A
Impedance	50			Ω
Input Output Connector	2.4			
Material	Aluminum/Gold Painting			
Weight	200g			
Dimension	40mmX35mmX12mm			
Package Sealing	General Sealing (Standard) Hermetically sealed(Optional)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

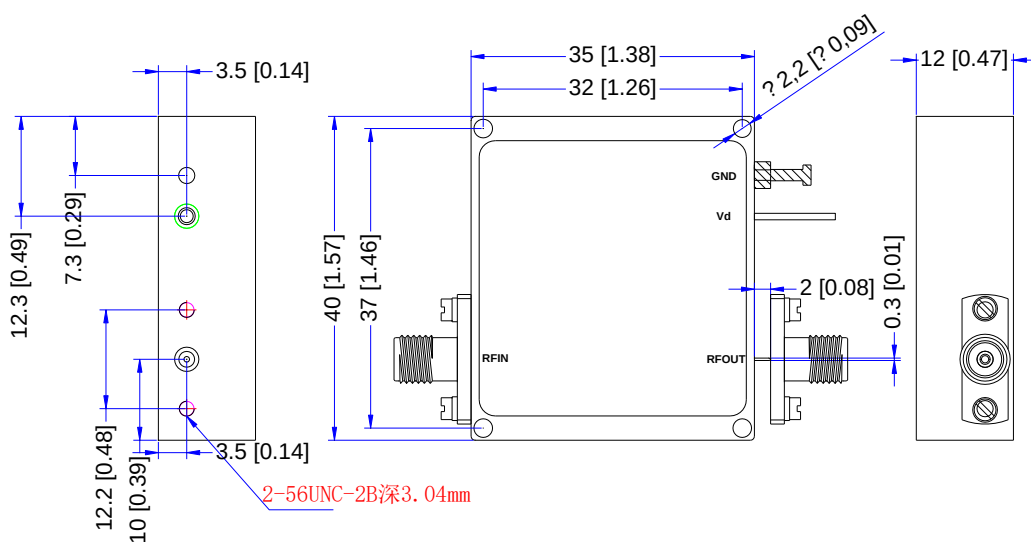

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

Heat Sink required during operation