

MODEL HIPA26403027

26.5-40GHz Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 26.5-40GHz
- Gain: 30dB
- Output Power P-1: 26dBm
- Bias: Vd= +8~12V; Id= 1100mA

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	26.5-40			GHz
Small Signal Gain		30		dB
Gain Flatness		± 1.5		dB
Input VSWR		1.9		-
Output VSWR		1.9		-
Output Power for 1 dB Compression (P1dB)		26		dBm
Output Power Past		27		dBm
Input Max Power(no damage)			+15	dBm
Noise Figure		5		dB
Suprious		-60		dBc
OIP3		35		dBm
DC Current (Vcc=+8~12V)		1100		mA
Weight	36.9			g
Impedance	50			Ω
Input Connector/Output Connector	K-Female			
Material	Aluminum			
Finishing	Gold Plated			
Dimension	1.20" (W) X 1.20" (L) X 0.50" (H)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

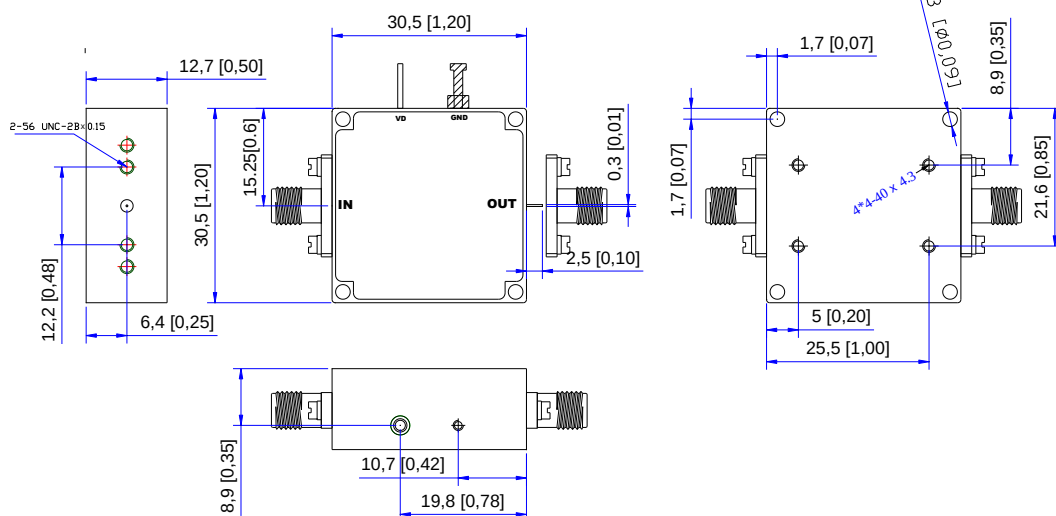

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HIMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****