

MODEL HIPA26403532

26.5-40GHz Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 26-40GHz
- Gain: 30dB
- Output Power: 32dBm
- High Output IP3: 40dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	26-40			GHz
Gain	32	35		dB
Gain Flatness		± 1.5		dB
Input VSWR		2.0		dB
Output VSWR		2.0		dB
Output Power for 1 dB Compression (P1dB)	30	32		dBm
Saturated Output Power (Psat)		33		dBm
Input Max Power(no damage)			20	dBm
Non-Harmonic Spurious		60		dBc
DC Current (Vcc=+12V)		3.5	4	A
Impedance	50			Ω
Input Output Connector	2.92-K			
Material	Aluminum			
Weight	80g			
Size	55mmX56mmX12.7mm			
Package Sealing	General Sealing (Standard) Hermetically Seal(Optional)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +65^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

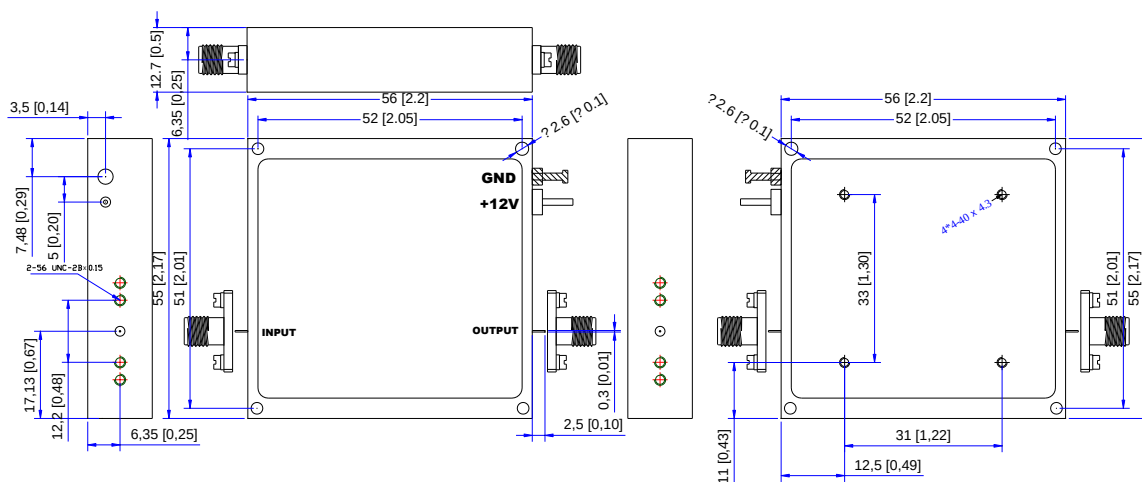

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****