




MODEL HIPA26405050AC

26-40GHz Broadband Power Amplifier



■ Features

- Ultra Wide Band: 26-40GHz
- Gain: 50dB
- Output Power Psat: 50dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	26-40			GHz
Small Signal Gain	50			dB
Gain Flatness		±3		dB
Input VSWR		2.0		-
Output Power for 1 dB Compression (P1dB)		47		dBm
Saturated Output Power (Psat)	50			dBm
Input Max Power(no damage)			+8	dBm
Internally Generated Spurious		-60		dBc
Impedance	50			Ω
Supply Power	110-220AC			
Input Output Connector	2.92-K			
Material	Aluminum			
Weight	35kg			
Dimension	5UX19 inches deep 23.62 inch Box			
display screen: Output Power; Temperature; current; VSWR protection; TEMP protection; Overload protection;				

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $0^{\circ}\text{C} \sim +55^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

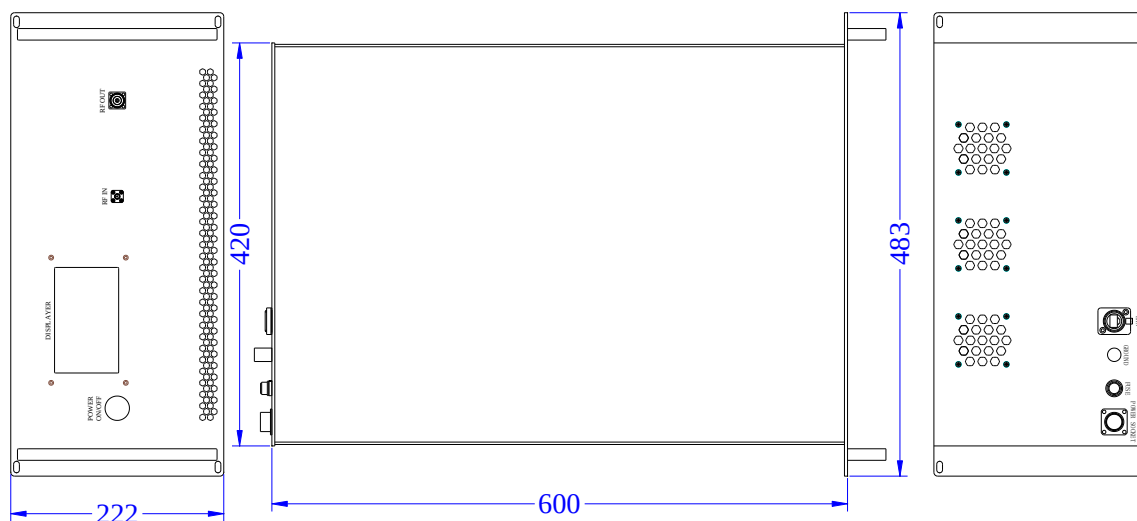

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.