

MODEL HIPA27293548

27-29MHz 60W Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Band: 27-29MHz
- Gain: 35dB
- Output Power Psat: 48dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	27-29			MHz
Small Signal Gain	33	35		dB
Power Gain Flatness		± 0.5	± 1	dB
Input VSWR		1.4	1.6	-
Output Power for 1 dB Compression (P1dB)	46	47		dBm
Saturated Output Power (Psat)		48		dBm
Input Max Power(no damage)		10	20	dBm
Harmonics @P-1	-35			dBc
Spurious Non-harmonics	-60			dBc
Efficiency		40%		
DC Current (Vcc=+24V) (@Pout=47dBm)		5		A
Impedance	50			Ω
Control Connector DB9	Pin: 1,2,3 VD; 4 ,5,6 NC, 7,8,9 GND			
Input Output Connector	SMA-k/SMA-K			
Material	Aluminum			
Weight	-			
Dimension	150X70X25mm			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

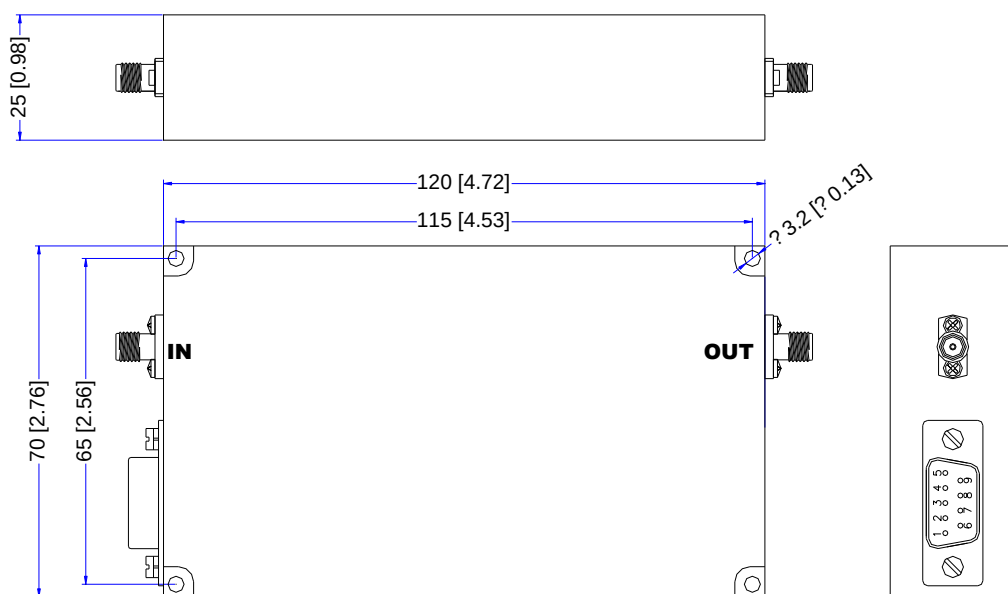

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****