

MODEL HIPA33503020

33-50GHz Medium Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 33-50GHz
- Gain: 30dB
- Output Power P-1: 18dBm
- Bias: Vd= +6~15V; Id= 650mA

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	33-50			GHz
Small Signal Gain		30		dB
Gain Flatness		± 2.0		dB
Input VSWR		1.9		-
Output VSWR		1.9		-
Output Power for 1 dB Compression (P1dB)		18		dBm
Output Power Past		20		dBm
Nf		4.5		dB
Input Max Power(no damage)			0	dBm
Supirous		-60		dBc
OIP3		25		dBm
DC Current (Vcc=+6~15V)		650		mA
Weight	36.9			g
Impedance	50			Ω
Input Connector/Output Connector	2.4mm-Female			
Material	Aluminum			
Finishing	Gold Plated			
Dimension	1.20" (W) X 1.20" (L) X 0.50" (H)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

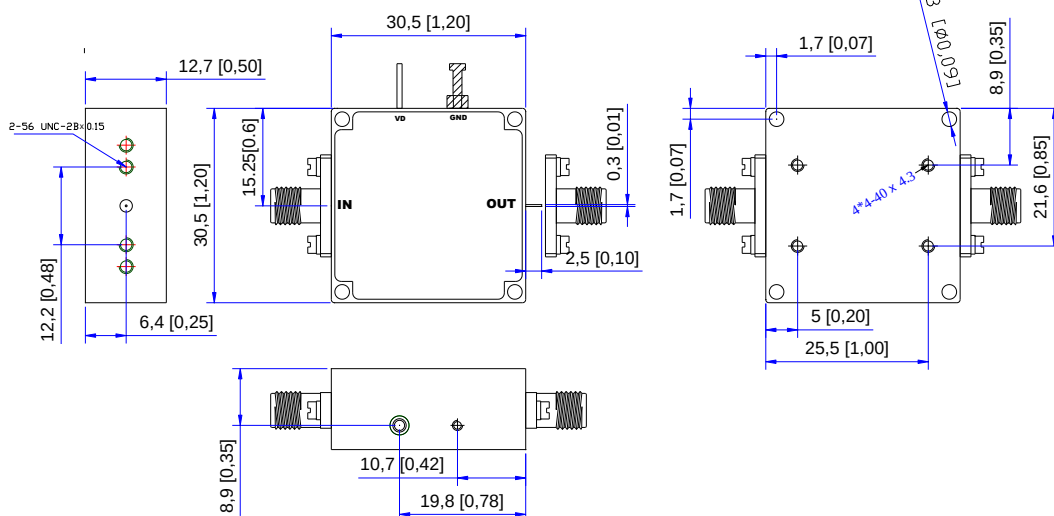

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****