


MODEL HIPAH3203527

0.03-20GHz Ultra Power Amplifier

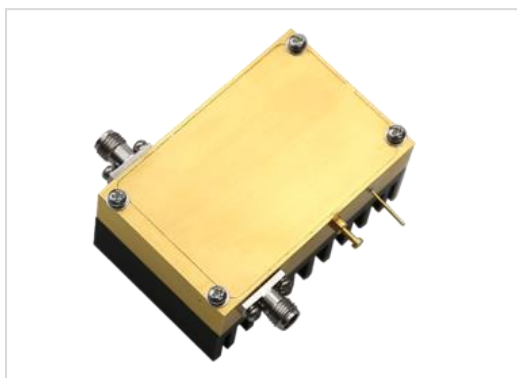

Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 0.03-20GHz
- Gain: 30dB
- Output Power P-1: 27dBm
- Bias: Vd=12V;Id=0.5A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Min.	Typ.	Max	Units
Frequency Range	0.03-2			2-20			GHz
Small Signal Gain	30	35		30	35		dB
Gain Flatness		± 1.5	± 2.0		± 1.5	± 2.0	dB
Input VSWR		1.4	1.8		1.4	1.8	-
Output VSWR		1.5	2.0		1.5	2.0	-
NF		3.5	4.5		2.5	3.5	dB
Output Power (P1dB)	26	27		26	27		dBm
Saturated Output Power (Psat)		28			28		dBm
Spurious		-60			-60		dBc
Input Max Power(no damage)			5			5	dBm
DC Current (Vcc=+12V)		500			500		mA
Impedance	50						Ω
Input Output Connector	SMA-K						
Material	Aluminum/Conductive oxide						
Weight	200g						
Package Sealing	General Sealing (Standard)						

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

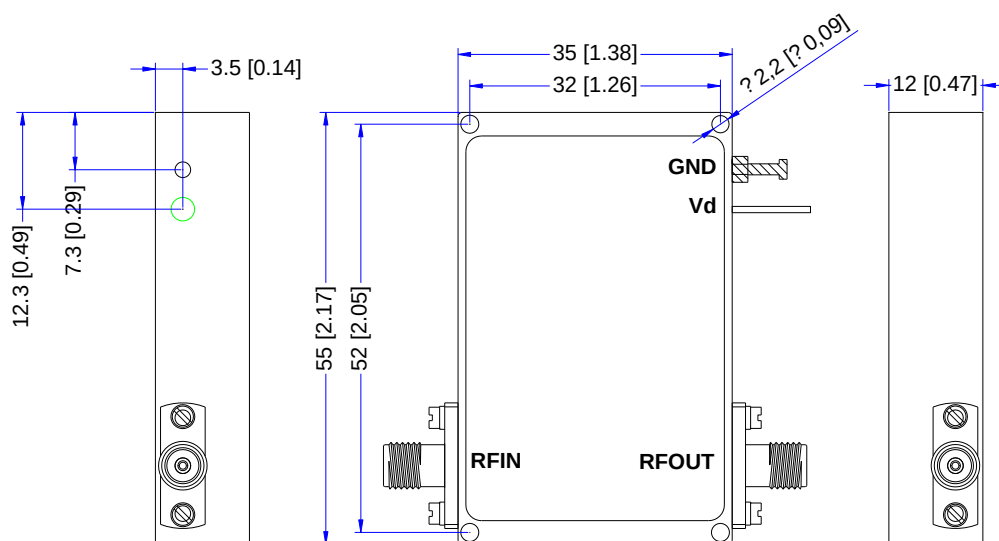

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****