

MODEL HIPAH5123030

0.05-12GHz Broadband Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 0.05-12GHz
- Gain: 30dB
- Output Power: 31dBm
- High Output IP3: 38dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	0.05-12			GHz
Gain	30			dB
Gain Flatness		±2.0		dB
Input VSWR		2.0		-
Output VSWR		2.0		-
Noise Figure		8		dB
Output Power for 1 dB Compression (P1dB)	30			dBm
Saturated Output Power (Psat)		31		dBm
Second Harmonic		-20		dBc
Spurious		-60		dBc
Input Max Power(no damage)			5	dBm
DC Current (Vcc=+24v)@(P1dB)		800	1000	mA
Impedance	50			Ω
Input Output Connector	SMA-Female/SMA-Female			
Material/Finishing	Aluminum/Conductive oxide			
Weight	50g			
Package Sealing	General Sealing (Standard)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

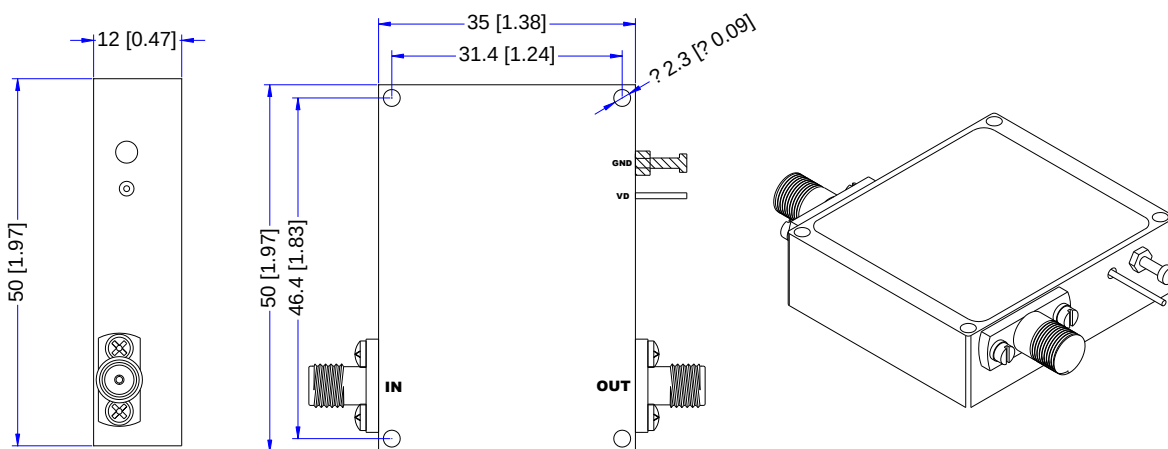

AP-S18

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****

■ Performance Plot

