

MODEL HIPAH6T33037

0.06-0.3GHz 4W Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 0.06-0.3GHz
- Gain: 32dB
- Output Power P-1: 36dBm
- Bias: Vd= 28V; Id= 0.5A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	0.06-0.3			GHz
Small Signal Gain	30			dB
Gain Flatness		± 1	± 2	dB
Input VSWR			2	-
Output Power for 1 dB Compression (P1dB)	36			dBm
Saturated Output Power (Psat)	37			dBm
Input Max Power(no damage)			12	dBm
Internally Generated Spurious	60			dBc
DC Current (Vcc=+28 V) (@Pout= 4W)		0.5		A
Impedance	50			Ω
Input/ Output Connector	SMA-k/SMA-k			
Material	Aluminum			
Finishing	Color oxidation			
Weight	-			
Dimension	140mm*65mm*23mm			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

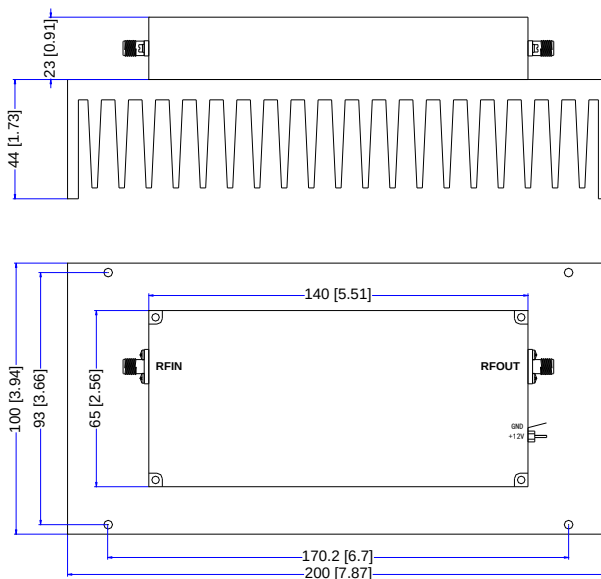

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.