


MODEL HIPAS3H94550

3-90MHz Power Amplifier

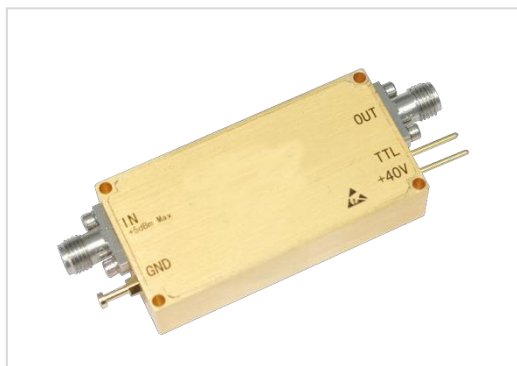

Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 3-90MHz
- Gain: 45dB
- Output Power Psat: 50dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	3-90			MHz
Small Signal Gain	43	45		dB
Gain Flatness		± 1.0		dB
Input VSWR		1.2	1.3	-
Output Power P-1 (CW)		47		dBm
Saturated Output Power Past		50		dBm
Harmonics @ 100W		-24	-20	dBc
Spurious		-70	-60	dBc
IP3		57		dBm
Input Max Power(no damage)			15	dBm
DC Current (Vcc=+28V) (@Pout=100W)			10	A
DC Connector	Filtered feed-through			
Shut down Pin: GND=OFF; Open=on	Typical: 1ms off; 10ms on			
Impedance	50			Ω
Input Output Connector	SMA-k/SMA-K			
Cooling	Heat-sink with Fan			
Weight	1.25kg			
Outline Size	3X8X1.25 Inch Max			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

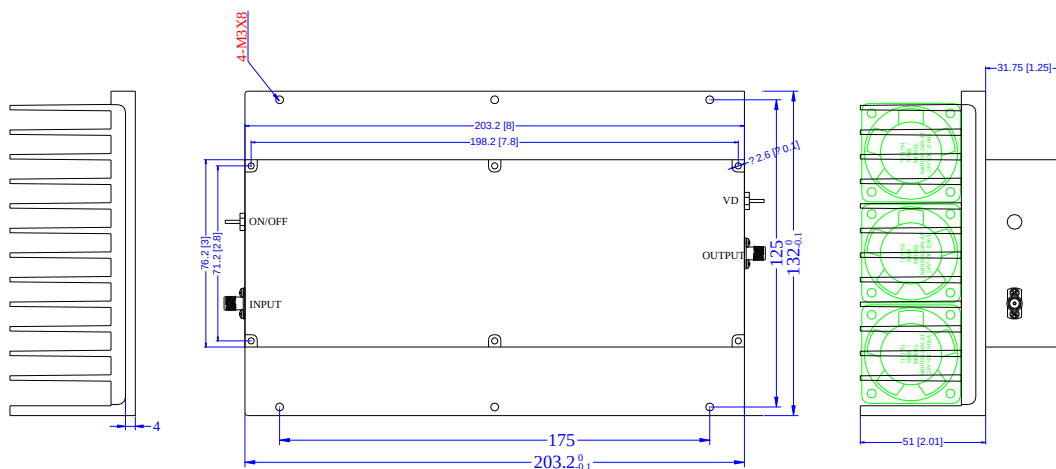

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****