

MODEL HIPAT1223332

0.1-22GHz Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 0.1-22GHz
- Gain: 32dB
- Output Power P-1: 27dBm
- Bias: $V_d = 24V$; $I_d = 0.8A$

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Min.	Typ.	Max	Units
Frequency Range	0.1-12			12-22			GHz
Small Signal Gain	32	33		30	31		dB
Gain Flatness		± 1.5			± 2		dB
Gain Variation Over Temperature		± 1	± 1.5		± 1	± 1.5	dB
Input VSWR		1.6			2.0		-
Output Power for 1 dB Compression	29	31		26	29		dBm
Saturated Output Power (Psat)	31	32		27	30		dBm
Input Max Power(no damage)			0			0	dBm
OIP3		36			35		dBm
DC Current ($V_{cc} = +24V$) (@ $P_{out} = 1W$)		800	1200		800	1200	mA
Impedance	50						Ω
Input/ Output Connector	SMA-Female						
Material	copper						
Finishing	Nickel Painting						
Weight	280g						
Package Sealing	General Sealing (Standard)						

MODEL HIPAT1223332
0.1-22GHz Power Amplifier

Environmental Conditions

Environmental Specificatons:

※ Operational Temperature -25°C~+70°C


※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

□ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

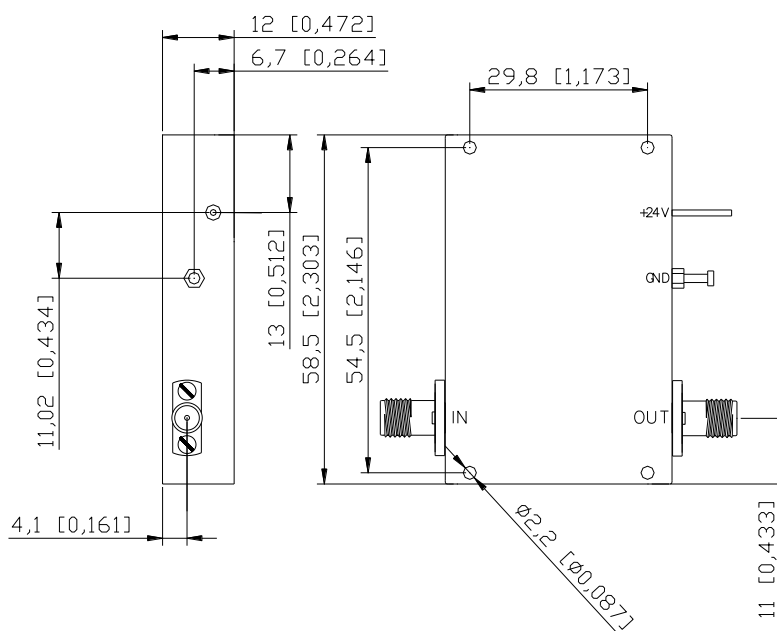

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HIMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

Heat Sink required during operation

■ Performance Plot

