

MODEL HIPAT1301520

0.1-30GHz Medium Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 0.1-30GHz
- Gain: 15dB
- Output Power P-1: 20dBm
- Bias: Vd= +6~15V; Id= 200mA

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	0.1-30			GHz
Small Signal Gain		15		dB
Gain Flatness		±2.5		dB
Input VSWR		2		-
Output VSWR		2		-
Output Power for 1 dB Compression (P1dB)		20		dBm
Output Power Past		21		dBm
Input Max Power(no damage)			+20	dBm
Suprious		-60		dBc
OIP3		30		dBm
Noise Figure		5		dB
DC Current (Vcc=+6~15V)		200		mA
Weight	36.9			g
Impedance	50			Ω
Input/ Output Connector	K-Female			
Material	Aluminum			
Finishing	Gold Plated			
Dimension	1.20" (W) X 1.20" (L) X 0.50" (H)			

Environmental Conditions

Environmental Specifications:


- ✧ Operational Temperature $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$
- ✧ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

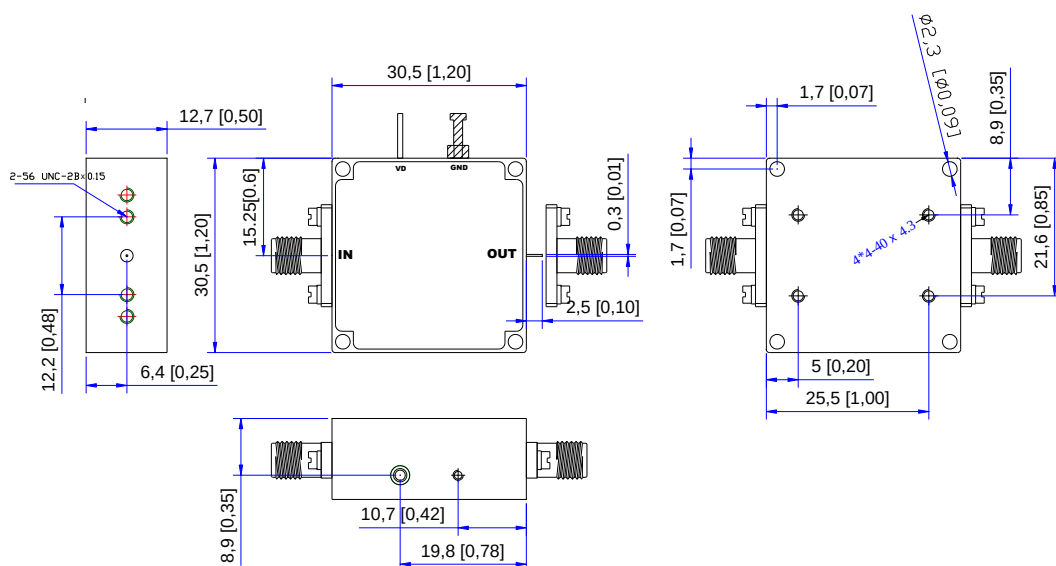

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HIMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****