

MODEL HIPAT4014040

0.4-1GHz 10W Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 0.4-1GHz
- Gain: 40dB
- Output Power Psat: 40dBm
- Bias: Vd=28V;Id=3A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	0.4-1			GHz
Small Signal Gain		40		dB
Gain Flatness		± 2		dB
Input VSWR			-10	-
Saturated Output Power (Psat)		40		dBm
Input Max Power			10	dBm
Harmonics@10W		-15		dBc
Spurious Signals		-60		dBc
DC Current (Vcc=+28V) (@Pout=10W)		3		A
DC Interface Connector		D-Sub 9-Pin, Male		
Input Output Connector	SMA Female			
Coling	External Heat Sink			
Impedance	50			Ω
Dimensions	150*90*27 (5.9*3.6*1.1)			mm (inch)

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

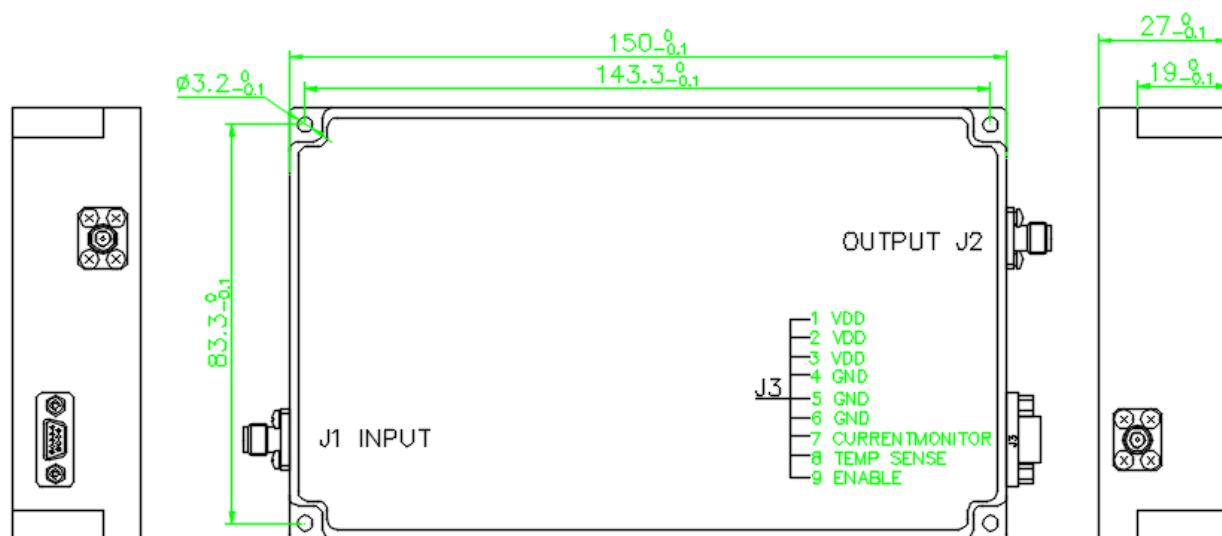

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****