

MODEL HIPAT5064340

0.5-6GHz 10W Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Broadband: 0.5-6GHz
- Gain: 40dB
- Output Power Psat: 40dBm
- Bias: Vd=30V;Id=2A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min	Typ.	Max.	Units
Frequency Range	0.5-6			GHz
Small Signal Gain	40	43		dB
Gain Flatness		± 2.5	± 3.5	dB
Input VSWR		1.5	2.5	-
Output Power for 1 dB Compression	37	38		dBm
Saturated Output Power	40			dBm
Harmonic Rejection	13	15		dB
Spurious		-60		dBc
Input Max Power(no damage)			8	dBm
DC Current (Vcc=+30V) (@Pout=10W)		2		A
Impedance	50			Ω
Input / Output Connector	SMA-K / SMA-K			
Material	Aluminum			
Dimension	125mmX95mmX12mm			

MODEL HIPAT5064340

0.5-6GHz 10W Power Amplifier

Environmental Conditions

Environmental Specificatons:

※ Operational Temperature -30°C~+70°C


※ Storage Temperature -45°C~+85°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

□ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

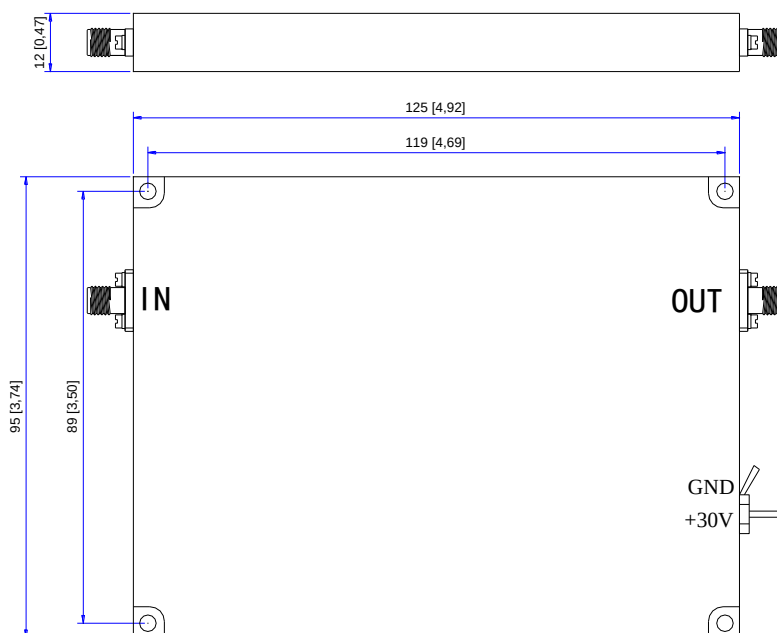

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HIMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

Heat Sink required during operation

■ Performance Plot

• Input VSWR&Output VSWR&Gain

