

MODEL HIPAT7073030

0.7-7.5GHz Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 0.7-7.5GHz
- Gain: 30dB
- Output Power P-1: 27dBm
- Bias: Vd= 24V; Id= 0.8A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	0.7-7.5			GHz
Small Signal Gain	30	33		dB
Gain Flatness		± 1.5		dB
Input VSWR		1.6		-
Output Power for 1 dB Compression (P1dB)		29		dBm
Saturated Output Power (Psat)	30			dBm
Input Max Power(no damage)			10	dBm
OIP3		40		dBm
DC Current (Vcc=+24V) (@Pout= 1W)		800		mA
Impedance	50			Ω
Input/ Output Connector	SMA-Female			
Material	copper			
Finishing	Gold Painting			
Weight	280g			
Package Sealing	General Sealing (Standard)			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ※ Storage Temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

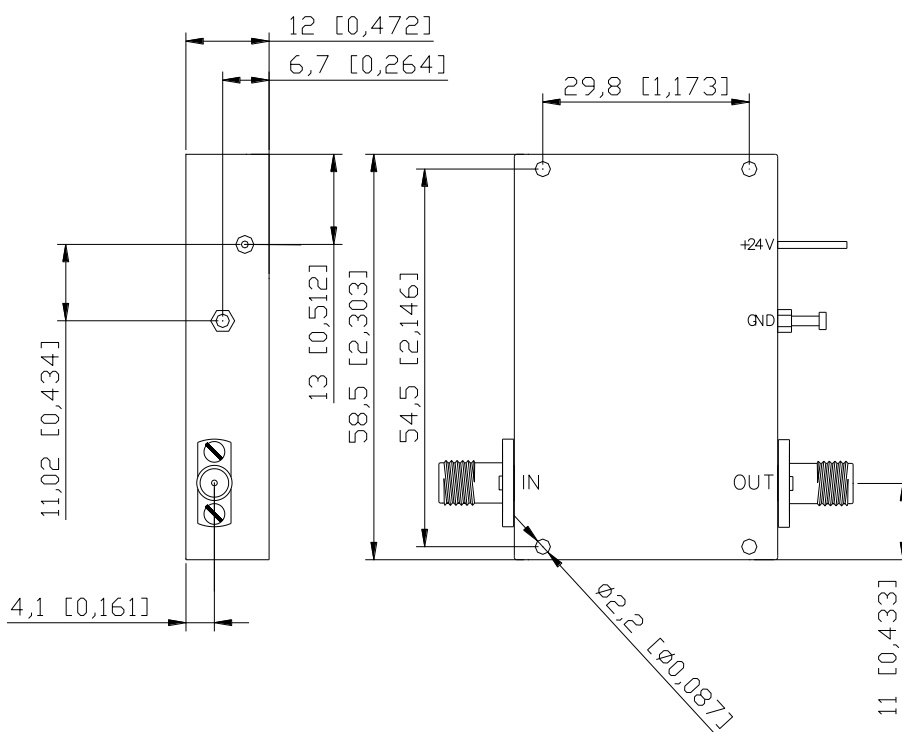

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****