

MODEL HIPAT8034040

0.8-3GHz Broadband Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Broadband: 0.8-3GHz
- Gain: 40dB
- Output Power Psat: 40dBm

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min	Typ	Max	Units
Frequency Range	0.8-3			GHz
Small Signal Gain	40	43		dB
Gain Flatness		±3	±3.5	dB
Input VSWR		1.2	1.3	-
Output Power for 1 dB Compression (P1dB)	39	40		dBm
Saturated Output Power (Psat)		41		dBm
Noise Figure		7		dB
Harmonic Rejection		10		dB
Input Max Power(no damage)			8	dBm
DC Current (Vcc=+28V) (@Pout=10W)		2		A
Impedance	50			Ω
Input / Output Connector	SMA-K / SMA-K			
Material	Aluminum			
Dimension	85mmX80mmX12mm			

Environmental Conditions

Environmental Specifications:


- ※ Operational Temperature $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- ※ Storage Temperature $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

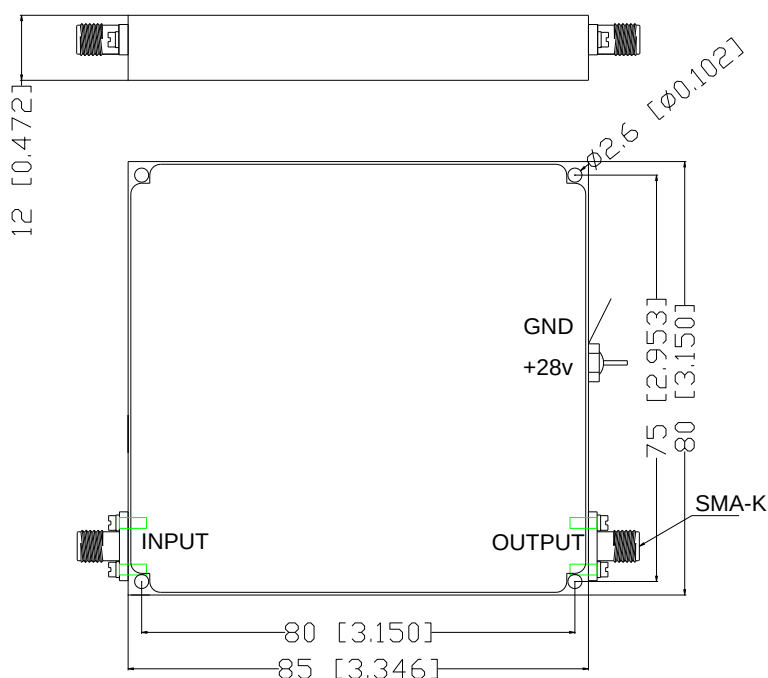

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****