

MODEL HIPAT8064339

0.8-6GHz 7W Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Broadband: 0.8-6GHz
- Gain: 40dB
- Output Power Psat: 38dBm
- Bias: Vd=28V;Id=1A

■ Applications

- Research and Development
- Telecommunications
- Wireless Infrastructure
- TR Modules

□ Electrical Specifications

Parameter	Min.	Typ.	Max.	Units
Frequency Range	0.8-6			GHz
Small Signal Gain	40	43		dB
Gain Flatness		±3	±3.5	dB
Input VSWR		1.5	2.5	-
Output Power for 1 dB Compression (P1dB)	37	38		dBm
Saturated Output Power (Psat)		39		dBm
Harmonic Rejection	13	15		dB
Spurious		-60		dBc
Input Max Power(no damage)			8	dBm
DC Current (Vcc=+28V) (@Pout=7W)		0.8	1.5	A
Impedance	50			Ω
Input / Output Connector	SMA-Female/SMA-Female			
Material	Aluminum			
Dimension	85mmX80mmX12mm			

Environmental Conditions

Environmental Specifications:


※ Operational Temperature	-25°C~+70°C
※ Storage Temperature	-45°C~+85°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

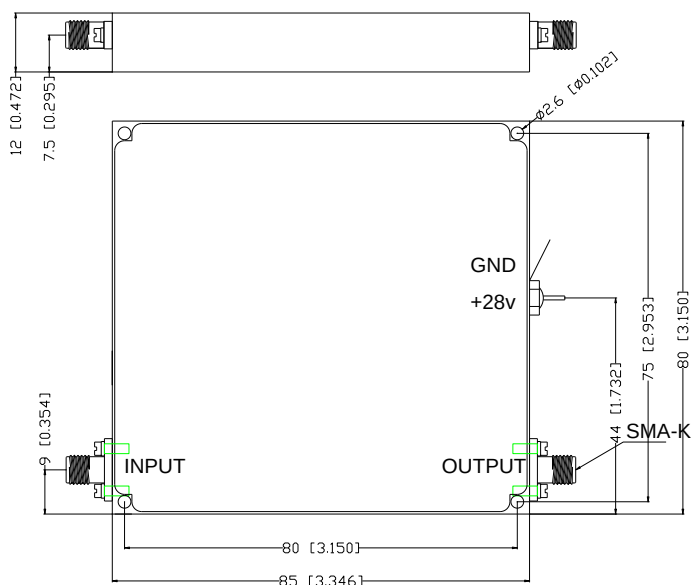

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. HiMicrowave technologies co., Ltd. reserves the right to change the above information without notice.

*****Heat Sink required during operation*****