

Legend

Road Authority shall approve usage of this TGS.









2 x Sign Spacing

1

GENERAL NOTES:

1. This TGS is only to be used as part of the DBCA Generic Traffic Management Plan.
2. All sign locations are to be checked prior to setout and positions adjusted to allow for specific site constraints such as vegetation, other signs, roadside furniture and sufficient space on shoulders/emergency lanes.
3. All existing speed zone signage within the temporary speed zone shall be covered with suitable opaque material for the duration of the stage and covers to be removed on completion of works each day. Unless

otherwise noted.

4. All plant used on site must be fitted with an audible reverse and flashing beacons.

5. When using MMS two 5mm thick core flute signs back to back in the MM frame to help prevent the sign from blowing out.
6. Use of Fold up signs and Swing signs

Use of Fold up signs and Swing signs acceptable in narrow, very low volume tracks <50 VPD.

DISCLAIMER:

It is the responsibility of the user of this traffic guidance scheme to confirm the appropriateness or otherwise for the intended work site based on rigorous risk assessment, review of the requirements of AS1742.3 and Main Roads WA Traffic Management for Works on Roads CoP and AGGTM. All responsibility will remain with the user to ensure compliance with relevant standards and the provision of the necessary level of protection for work personnel and work site.


Drawn: Cheryl Johnson

AWTM Cert. No: KTS-AWTM-19-47786-01

Signed: cherylann

Reviewed by: Brad Brooksby AWTM Cert. No: AUS-AWTM-16-1183-07

Signed: El Poulela

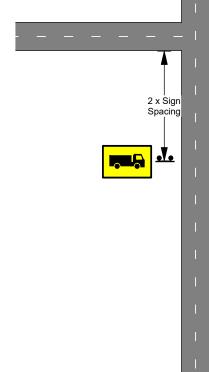

SIGN SPACING

Speed of Traffic km/h	Distance (m)
55 or less	15m
56 to 65	45m
Greater than 65	Speed of traffic in km/h

TRUCK MOVEMENTS

DATE: 24/02/2022 | REV No: 14 | DBCA - 22 - 20